

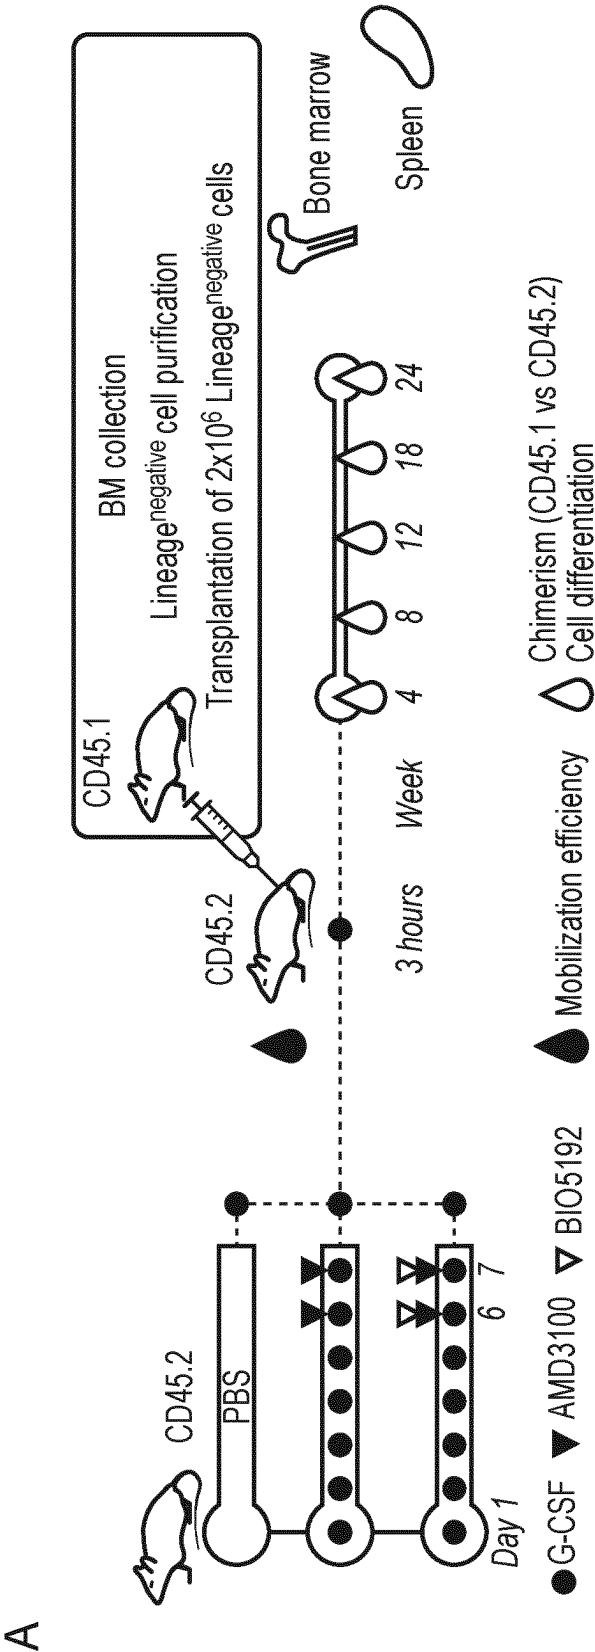
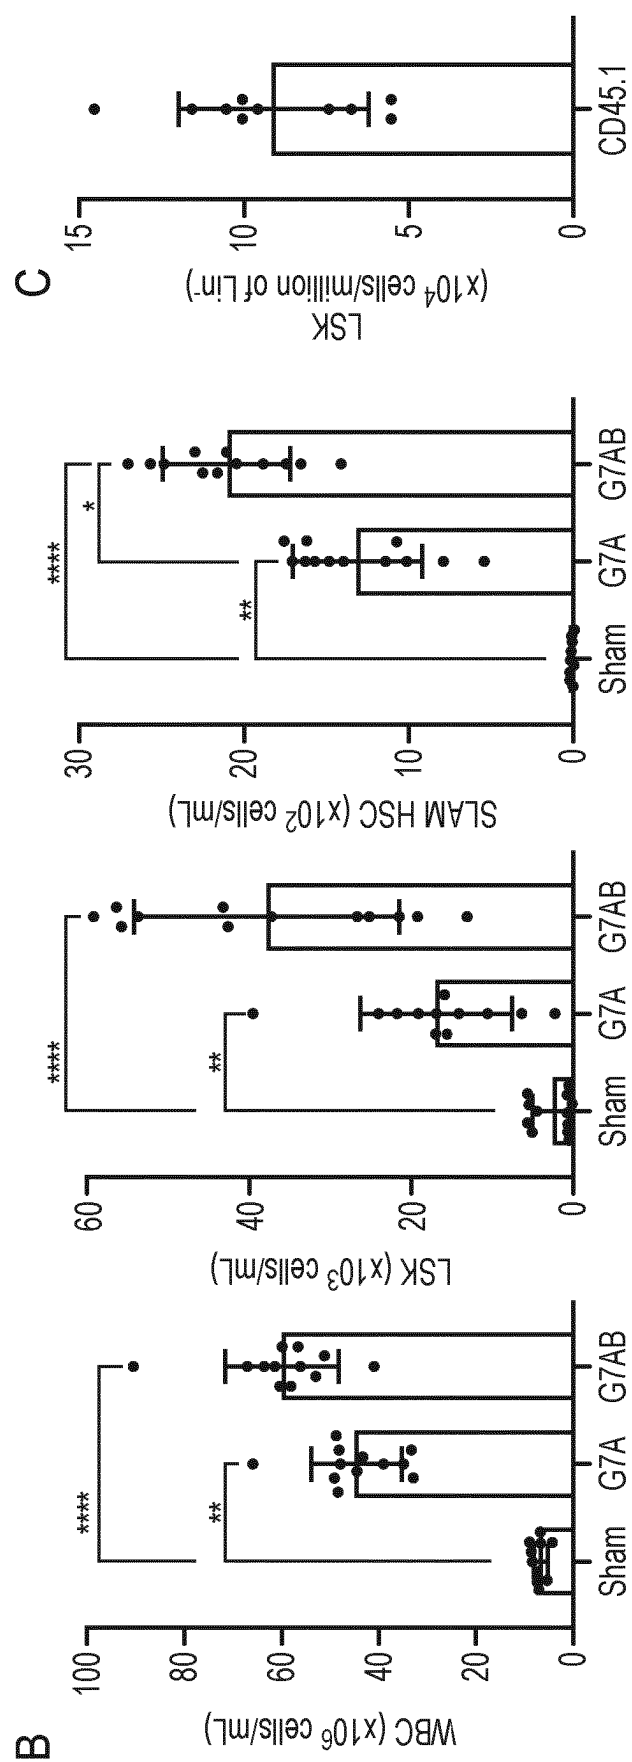


FIG. 1



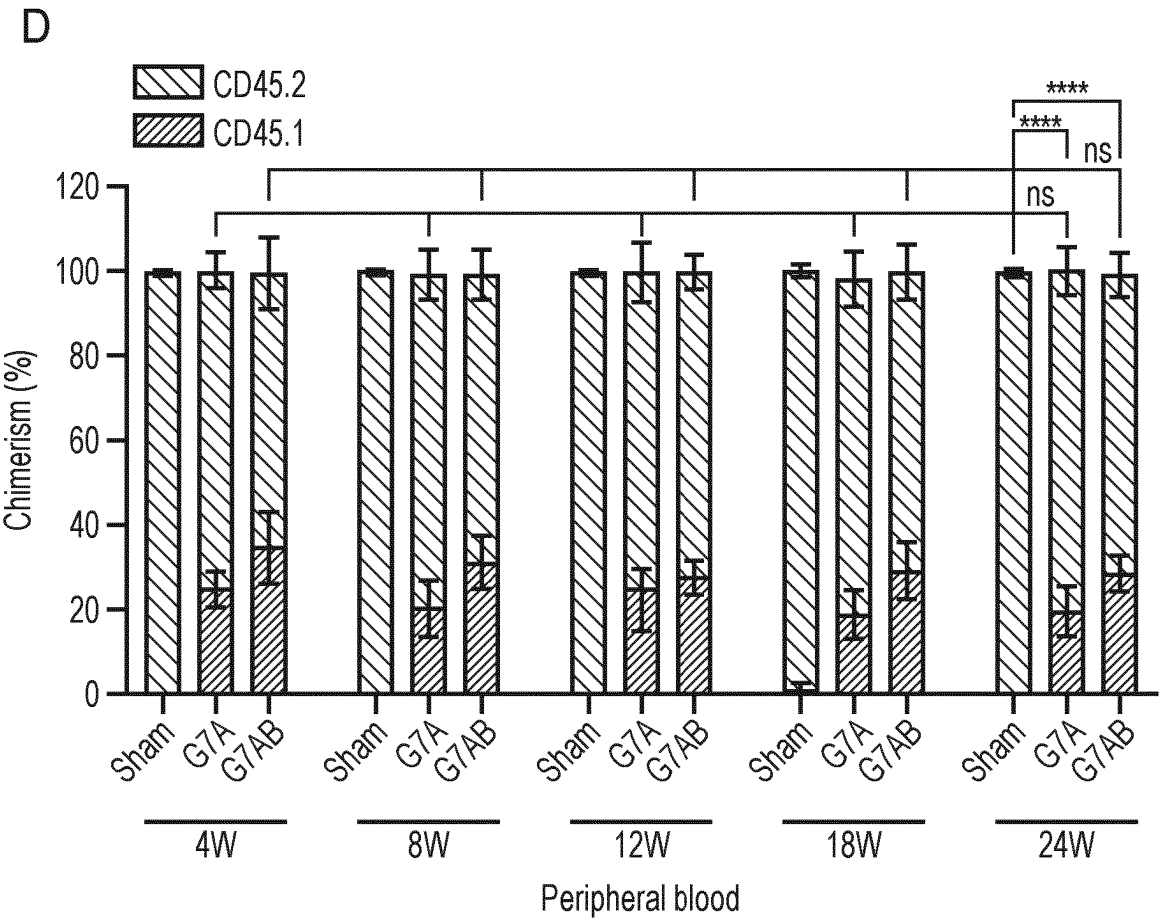


FIG. 1 (continued)

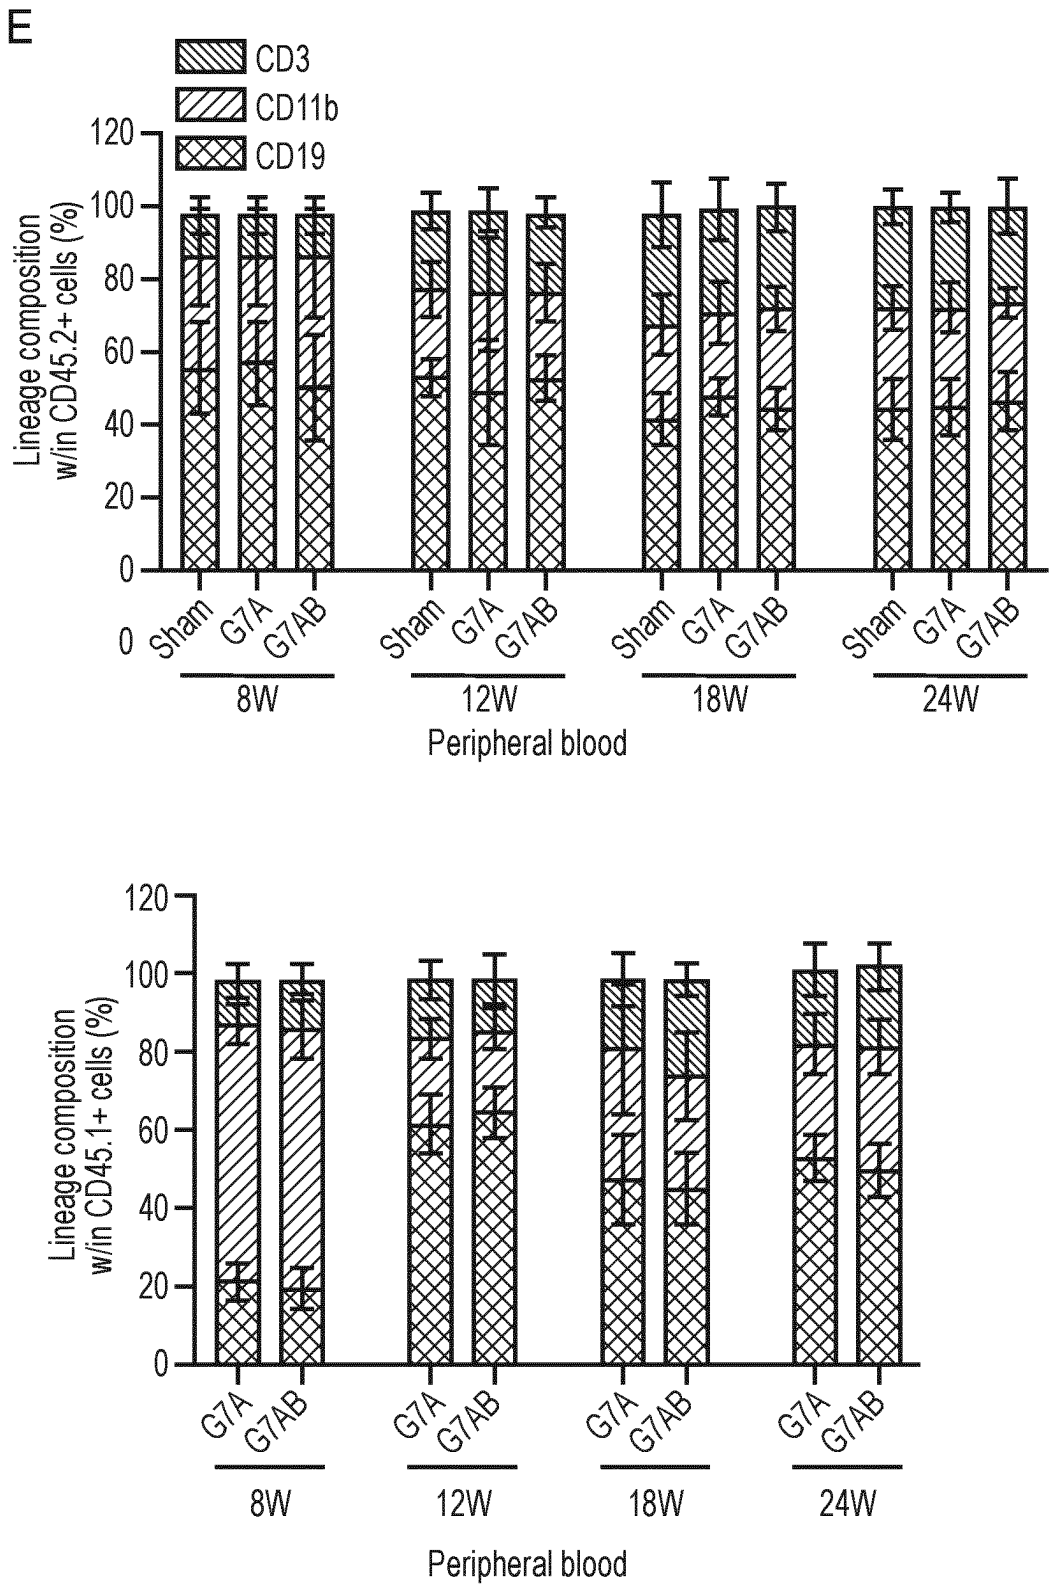


FIG. 1 (continued)

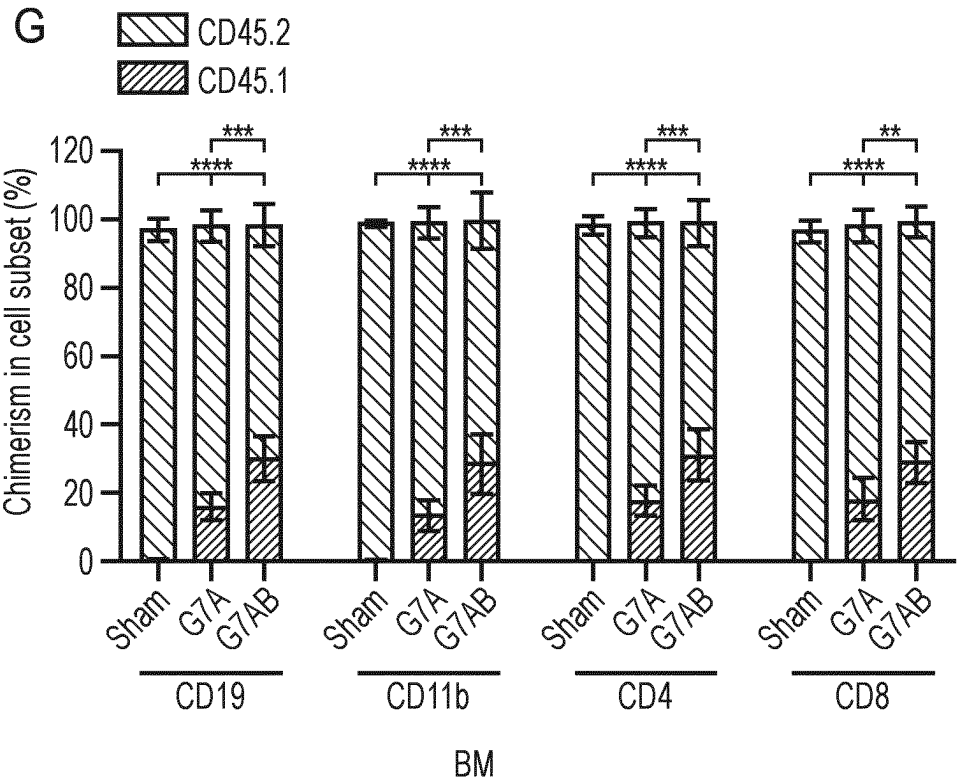
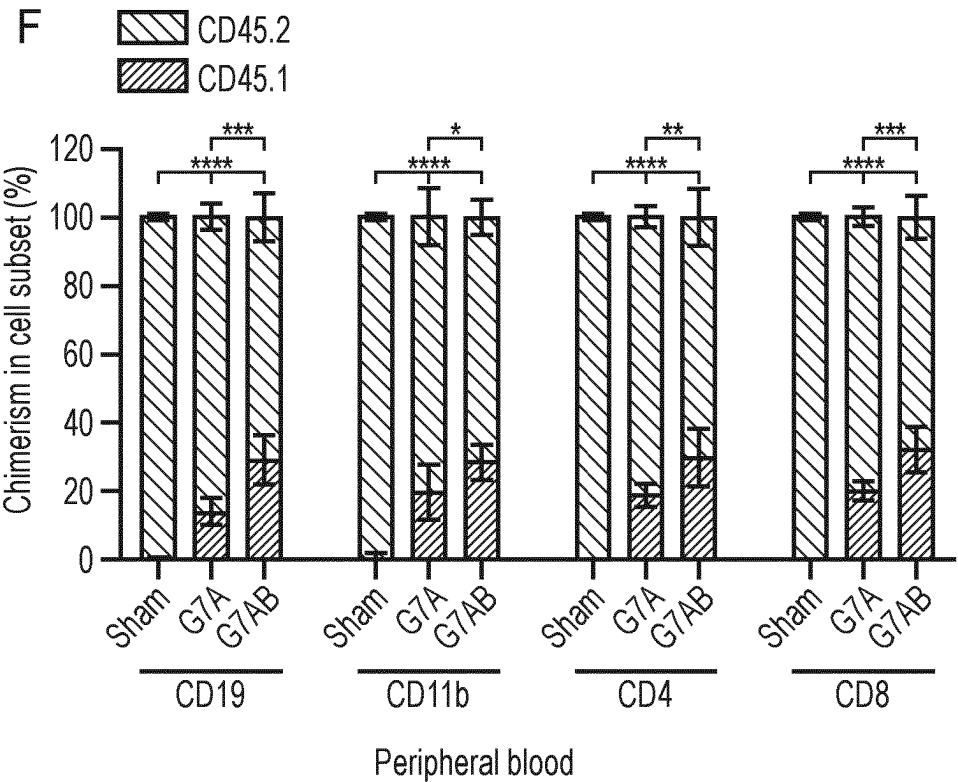


FIG. 1 (continued)

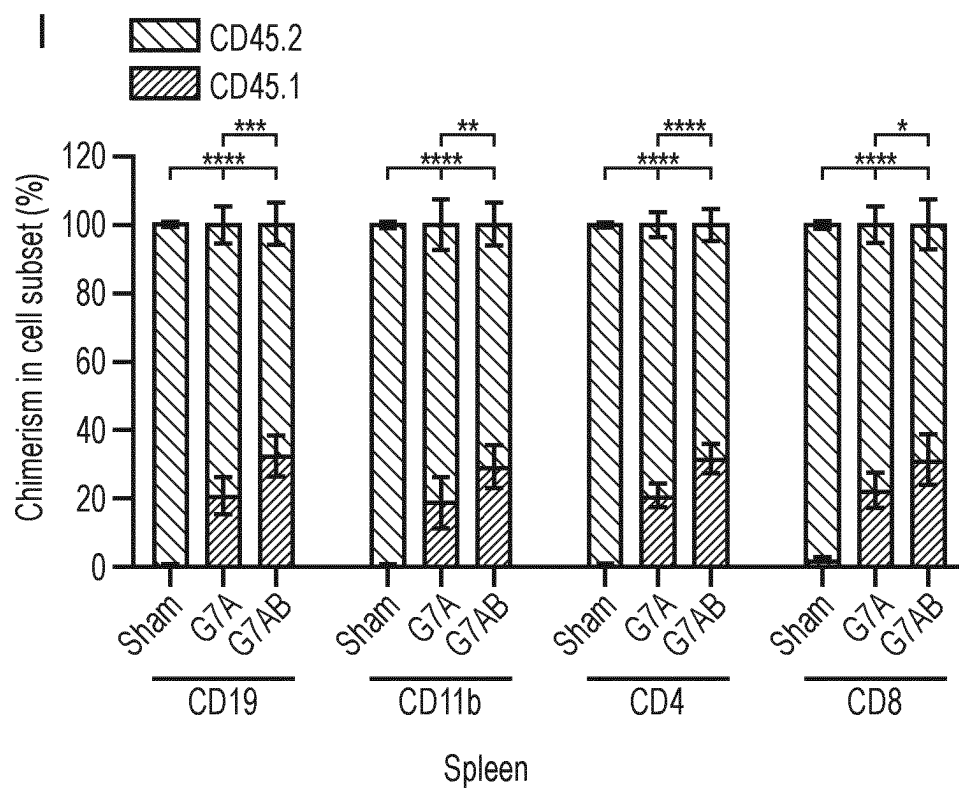
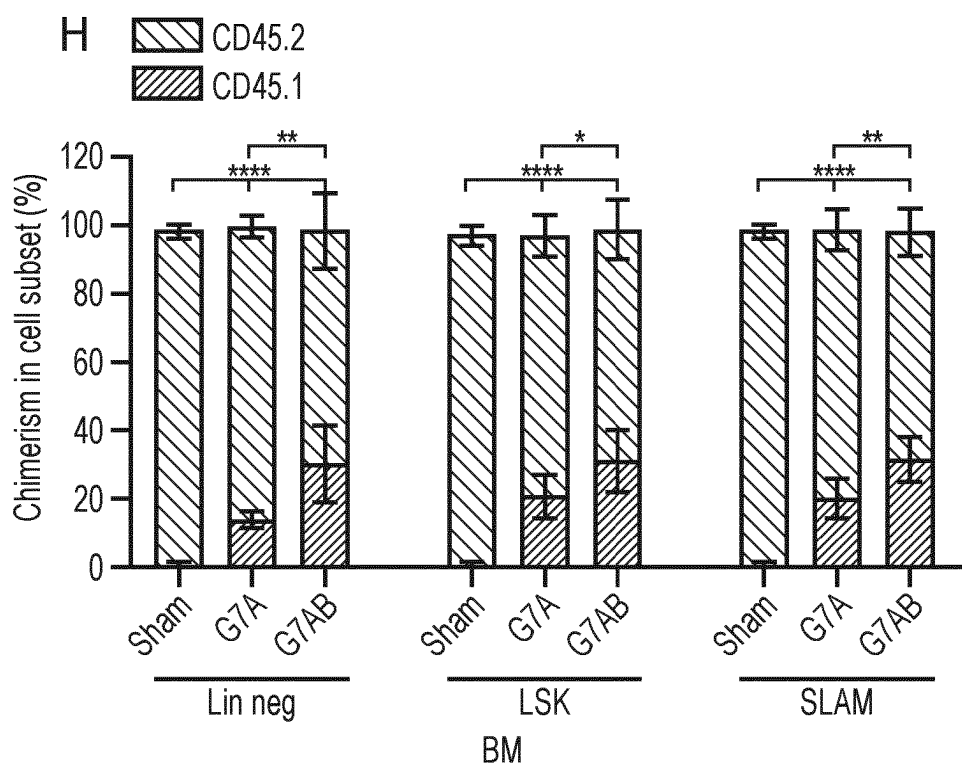


FIG. 1 (continued)

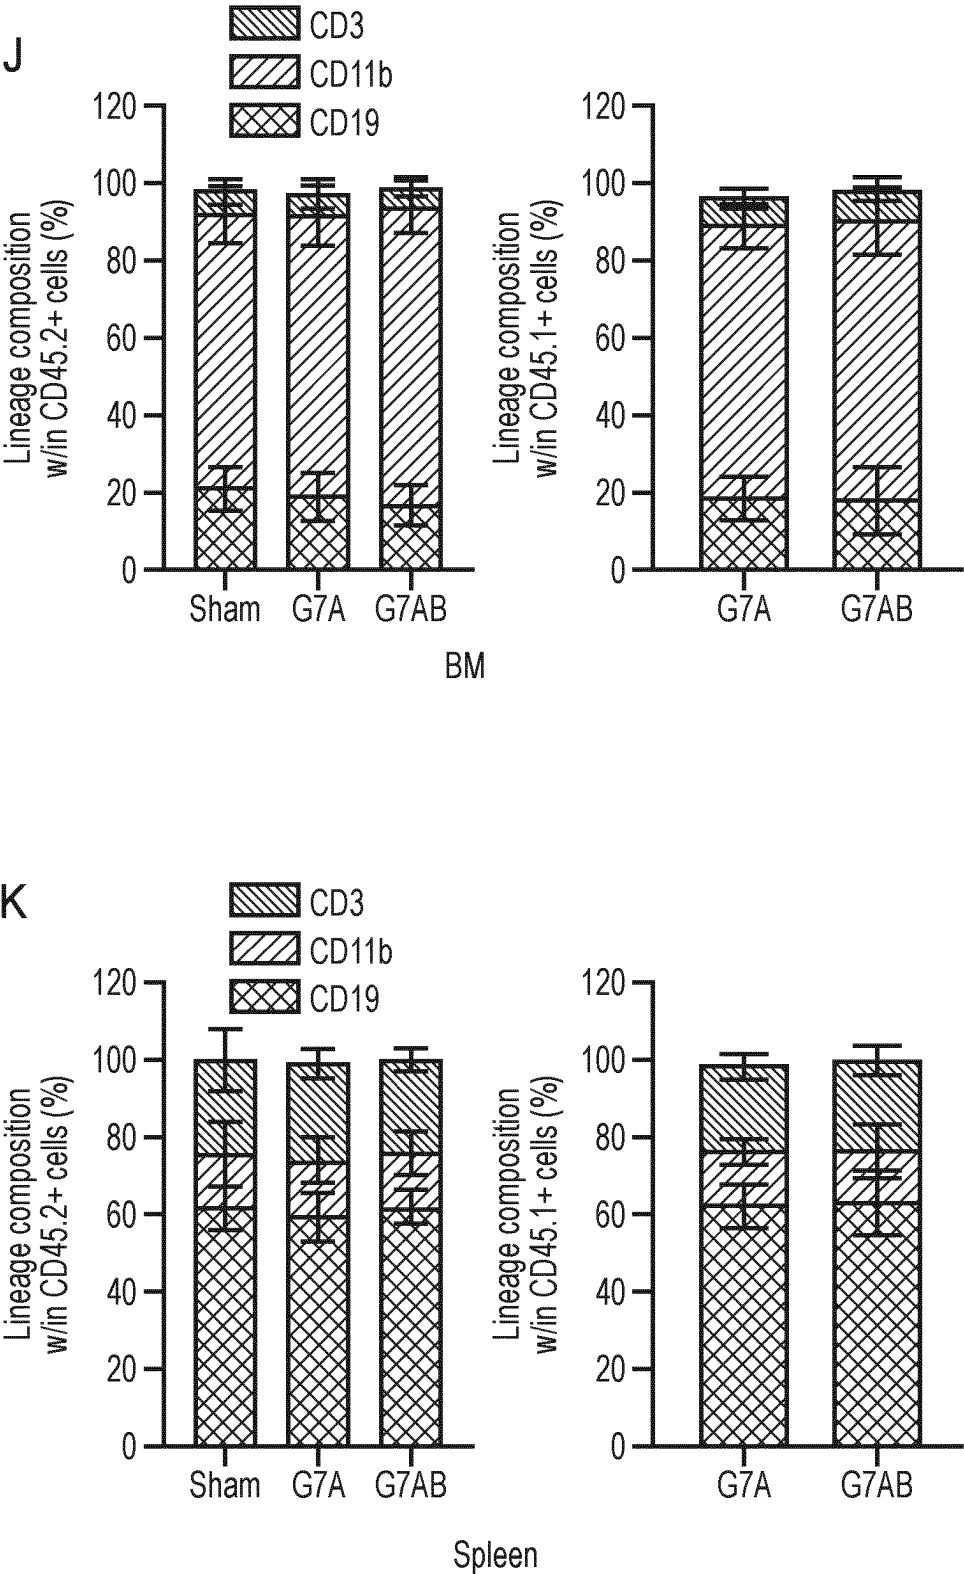
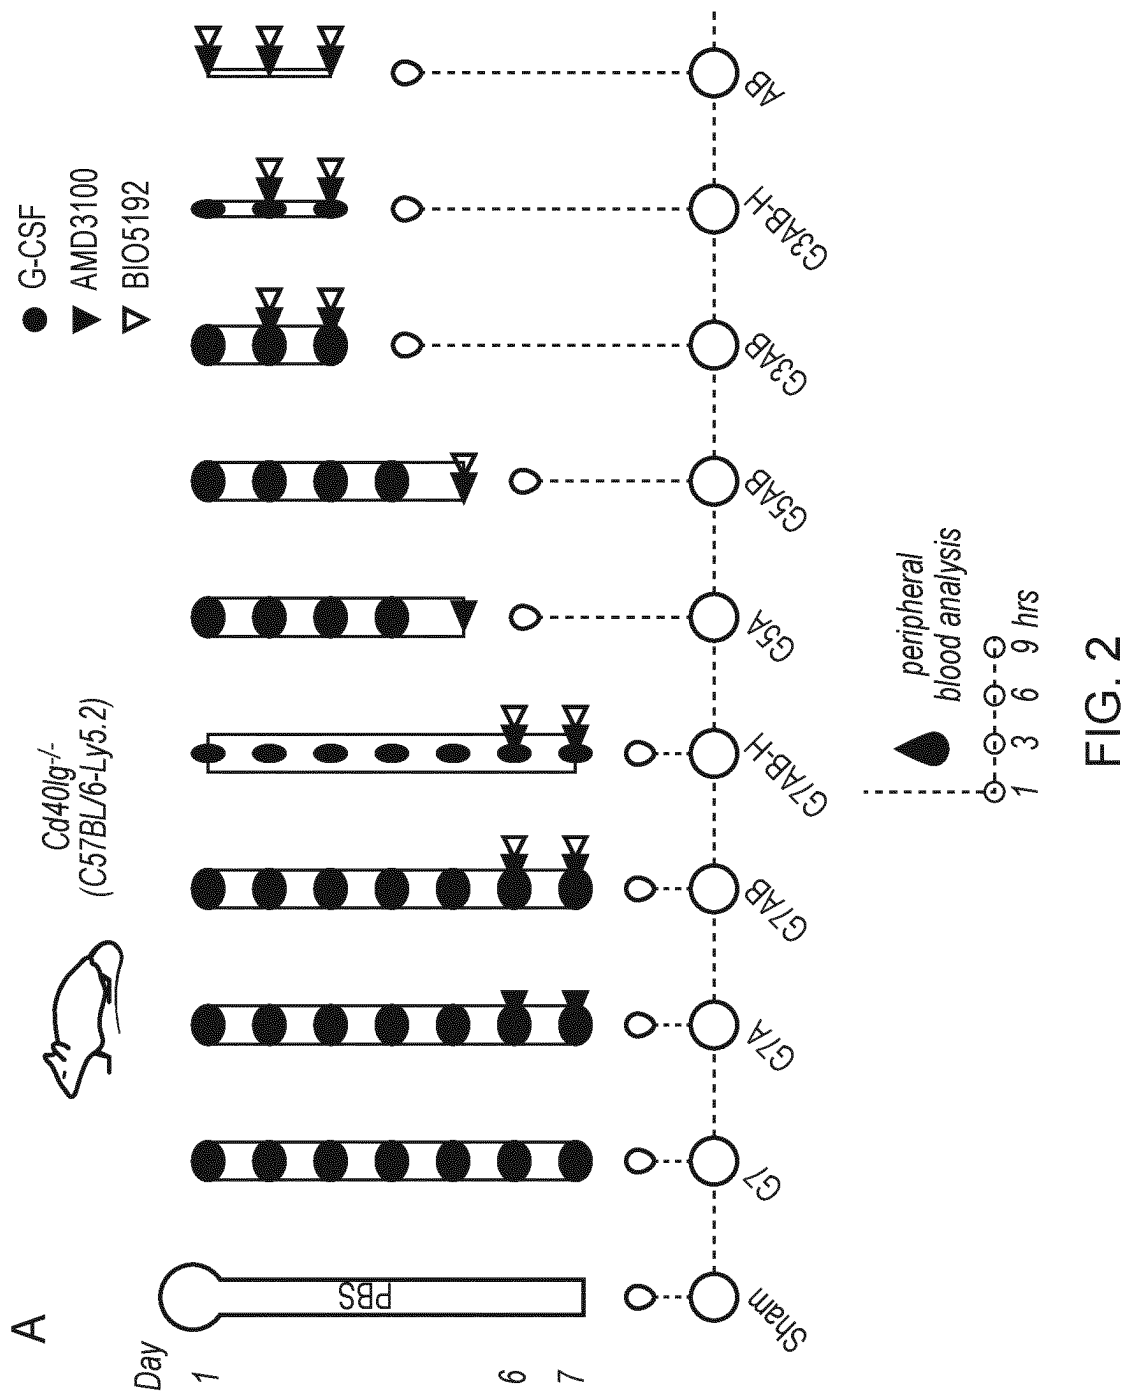
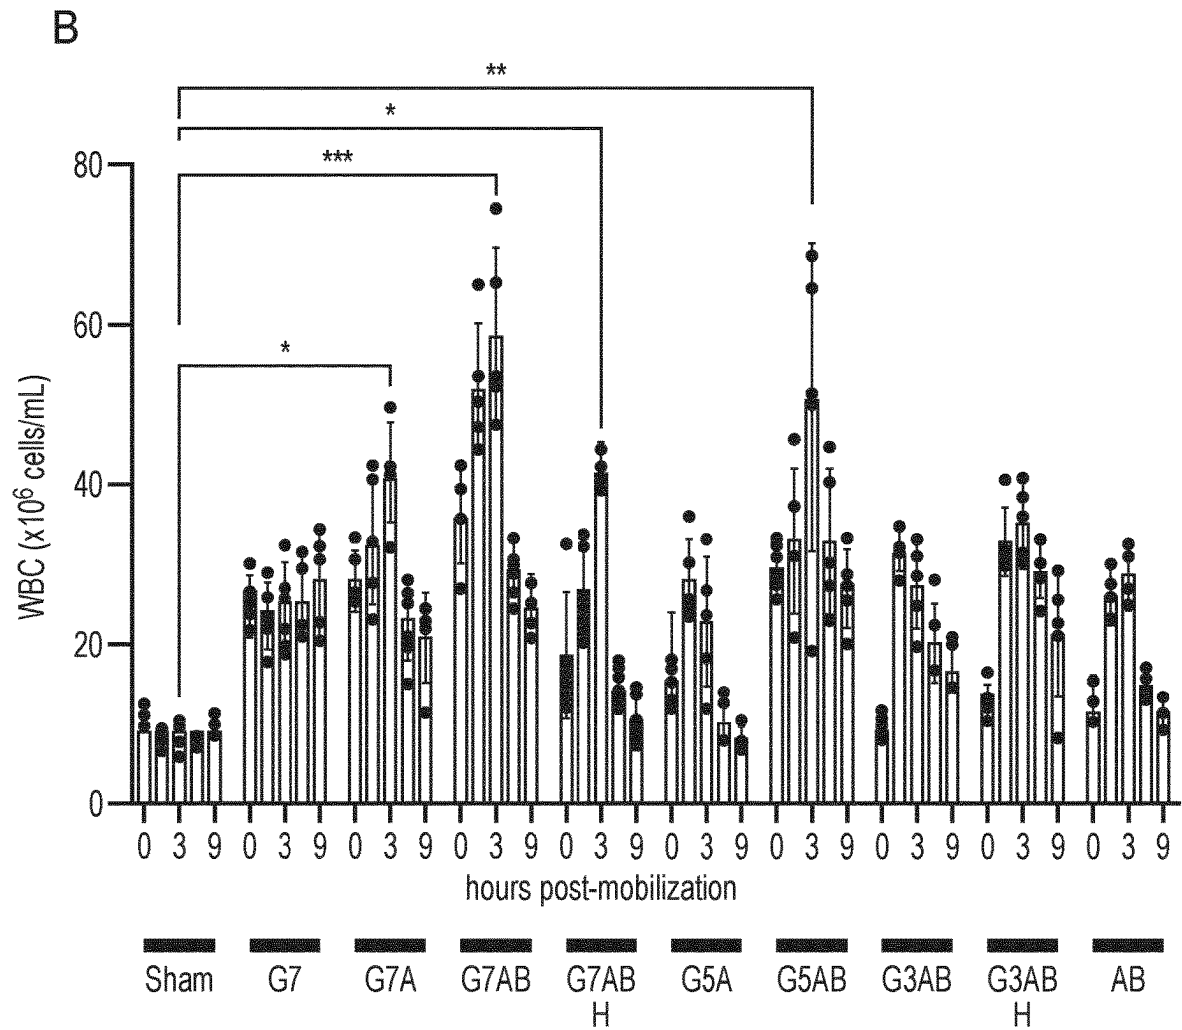


FIG. 1 (continued)





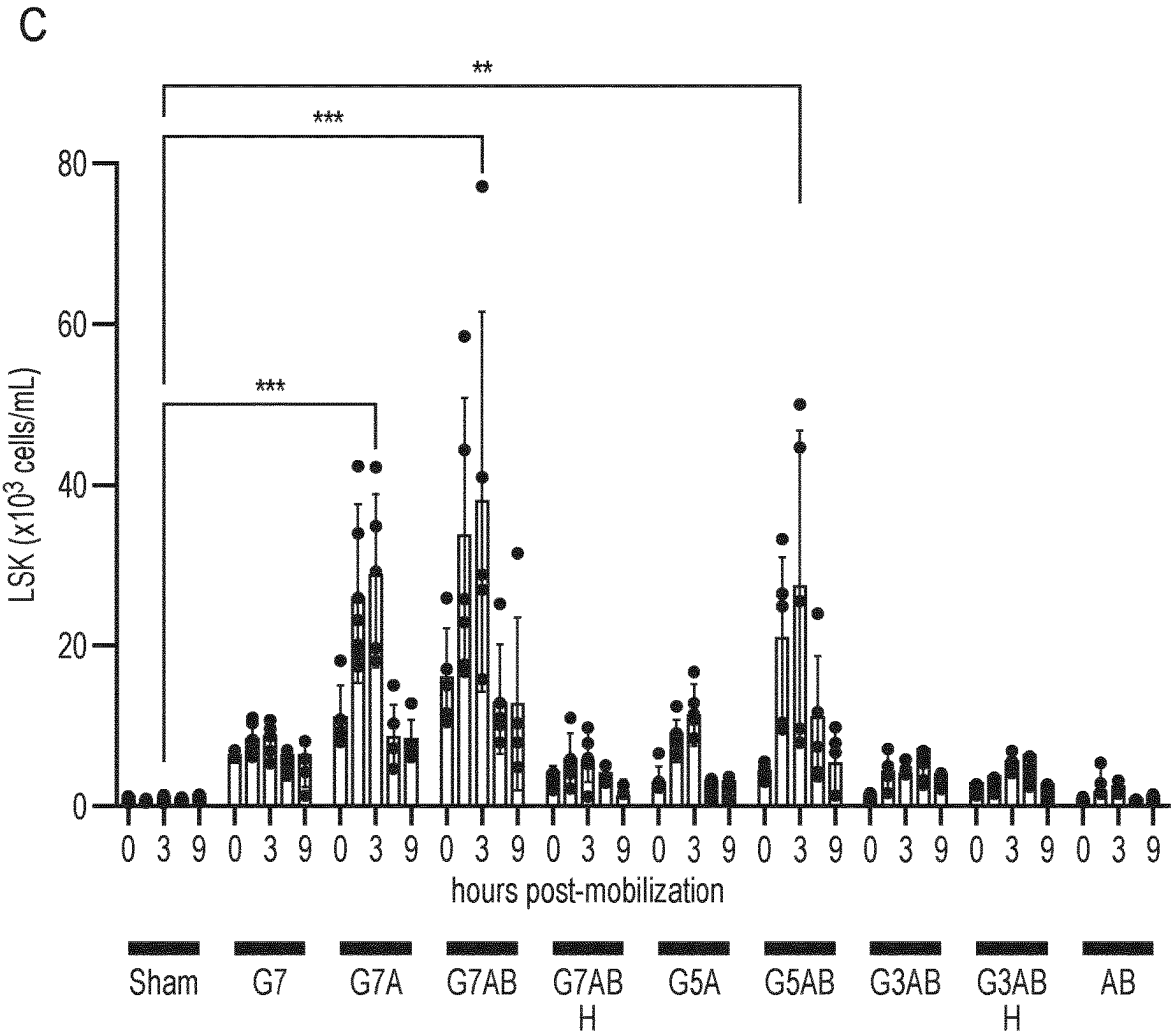


FIG. 2 (continued)

D

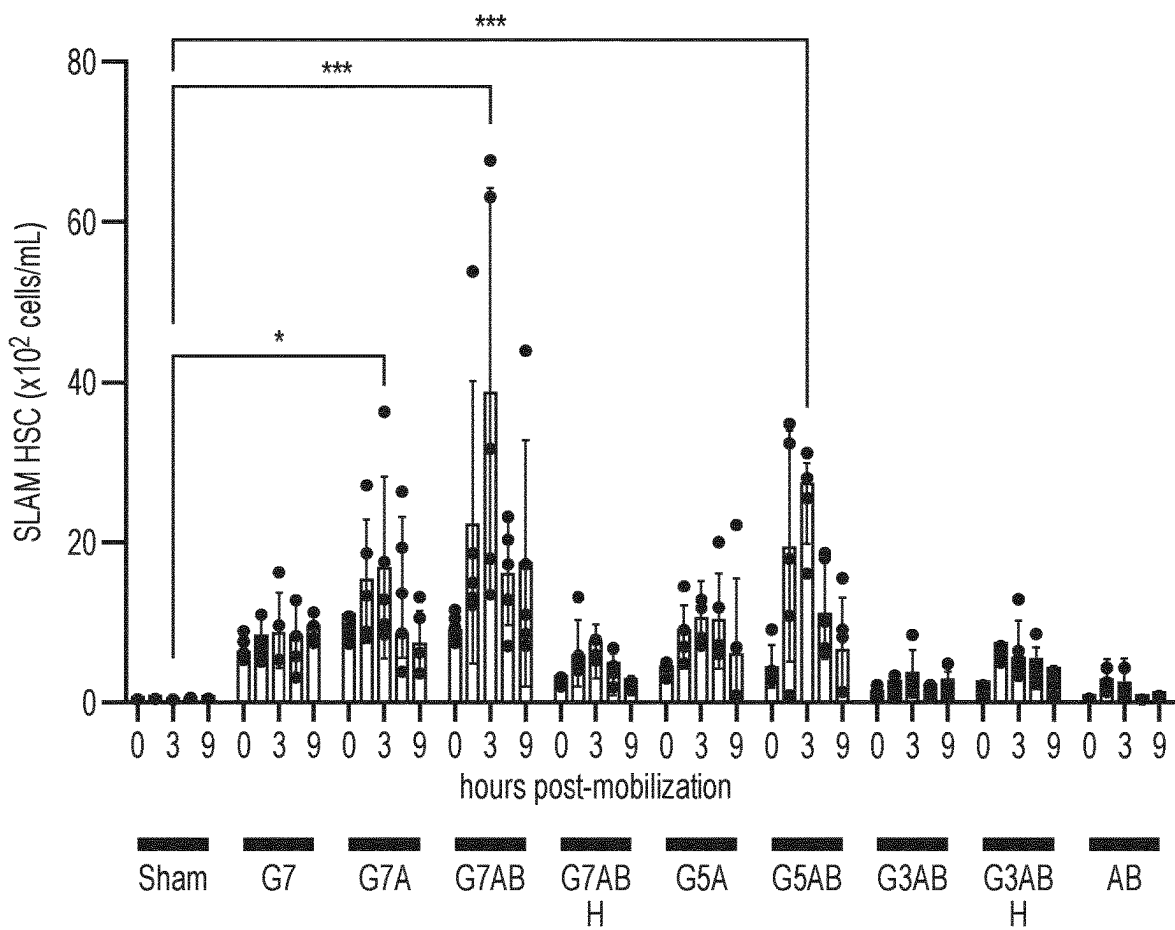


FIG. 2 (continued)

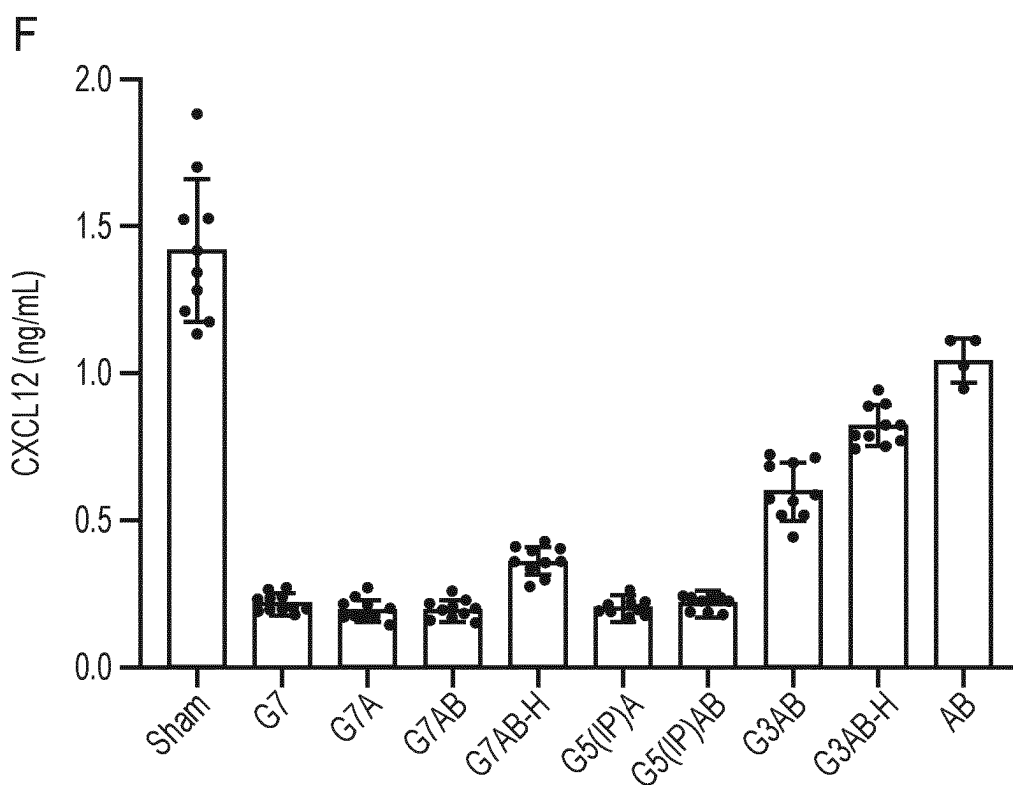
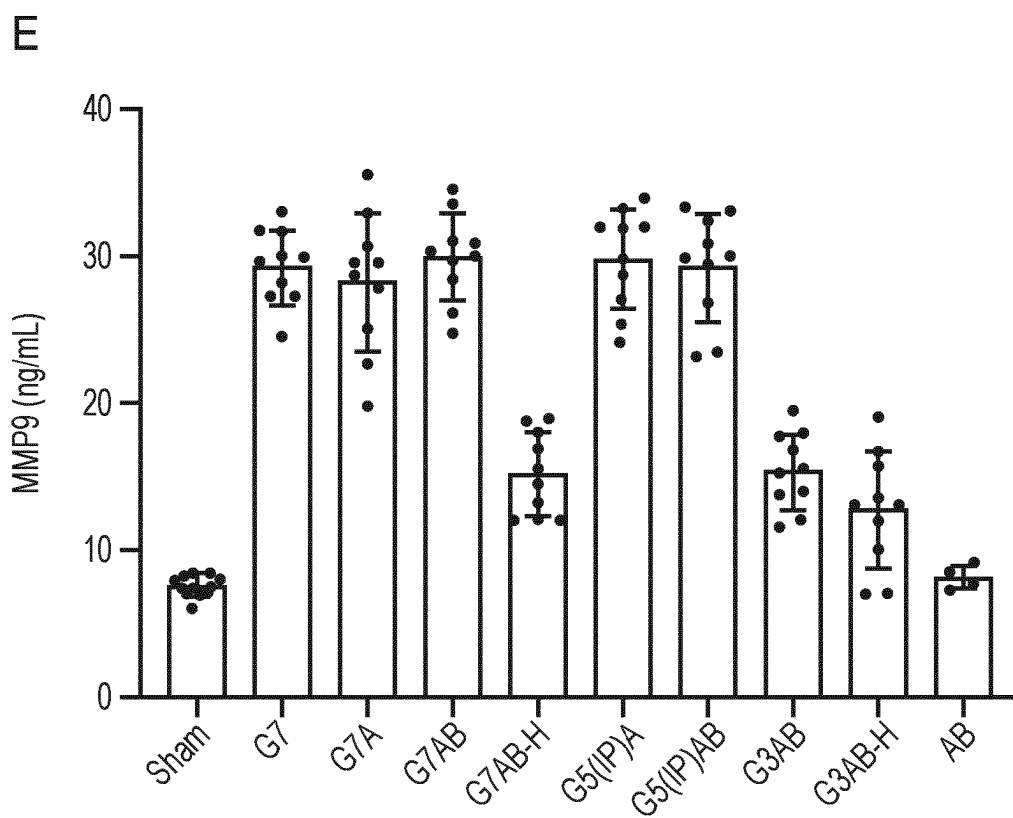


FIG. 2 (continued)

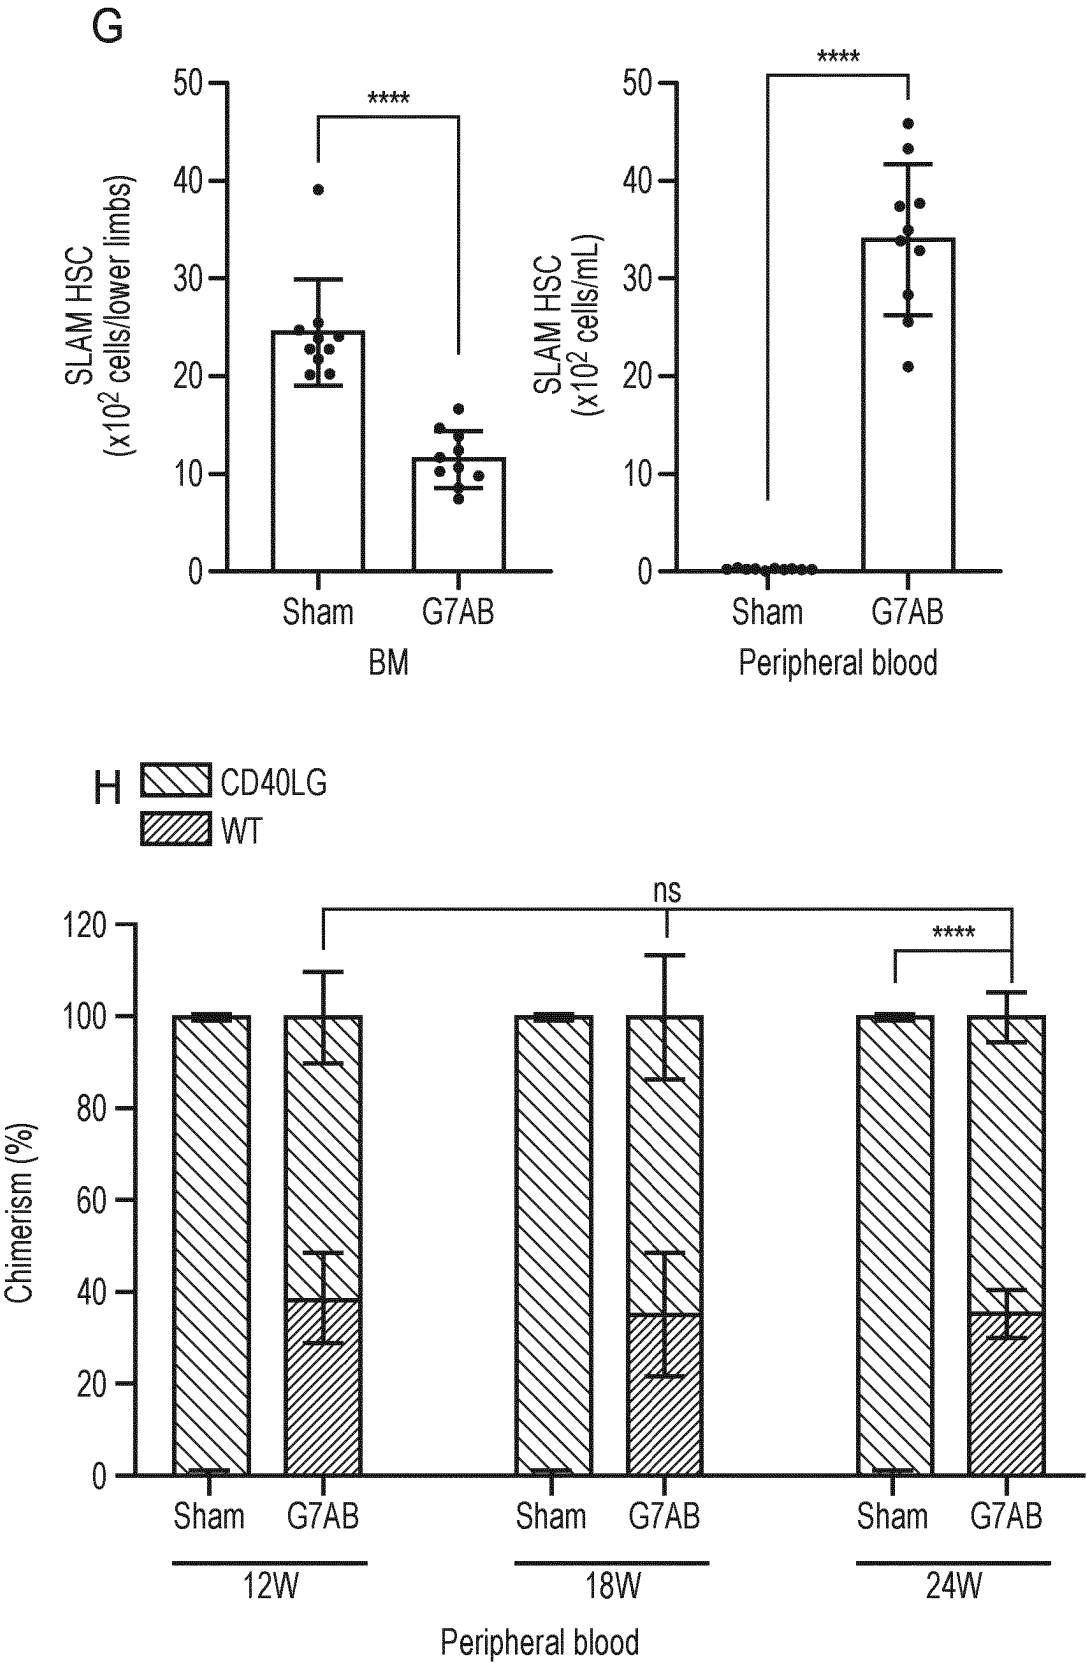


FIG. 2 (continued)

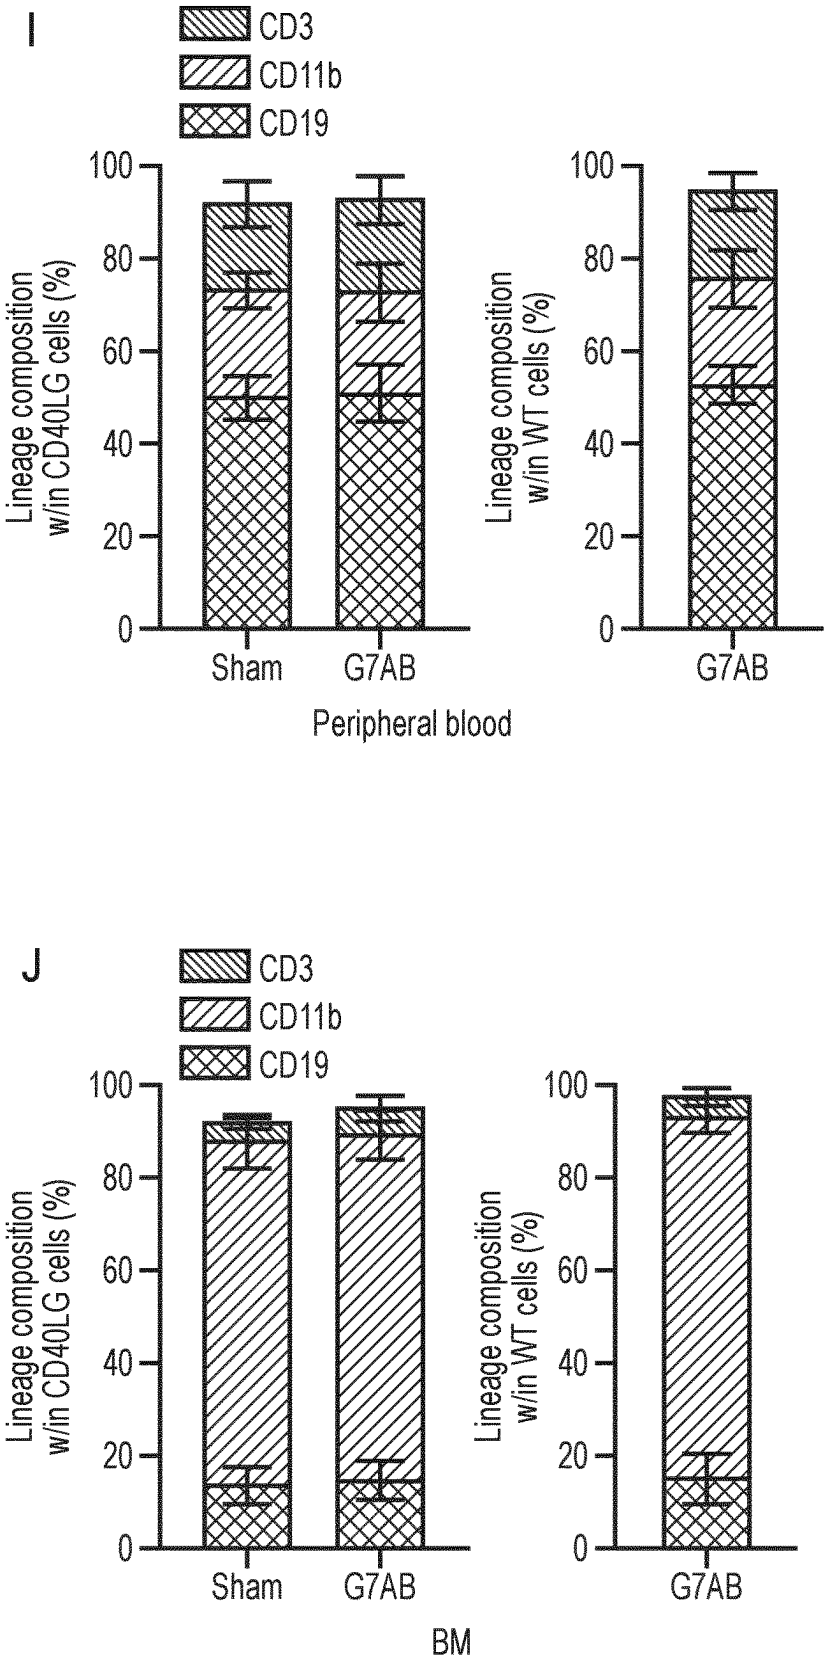


FIG. 2 (continued)


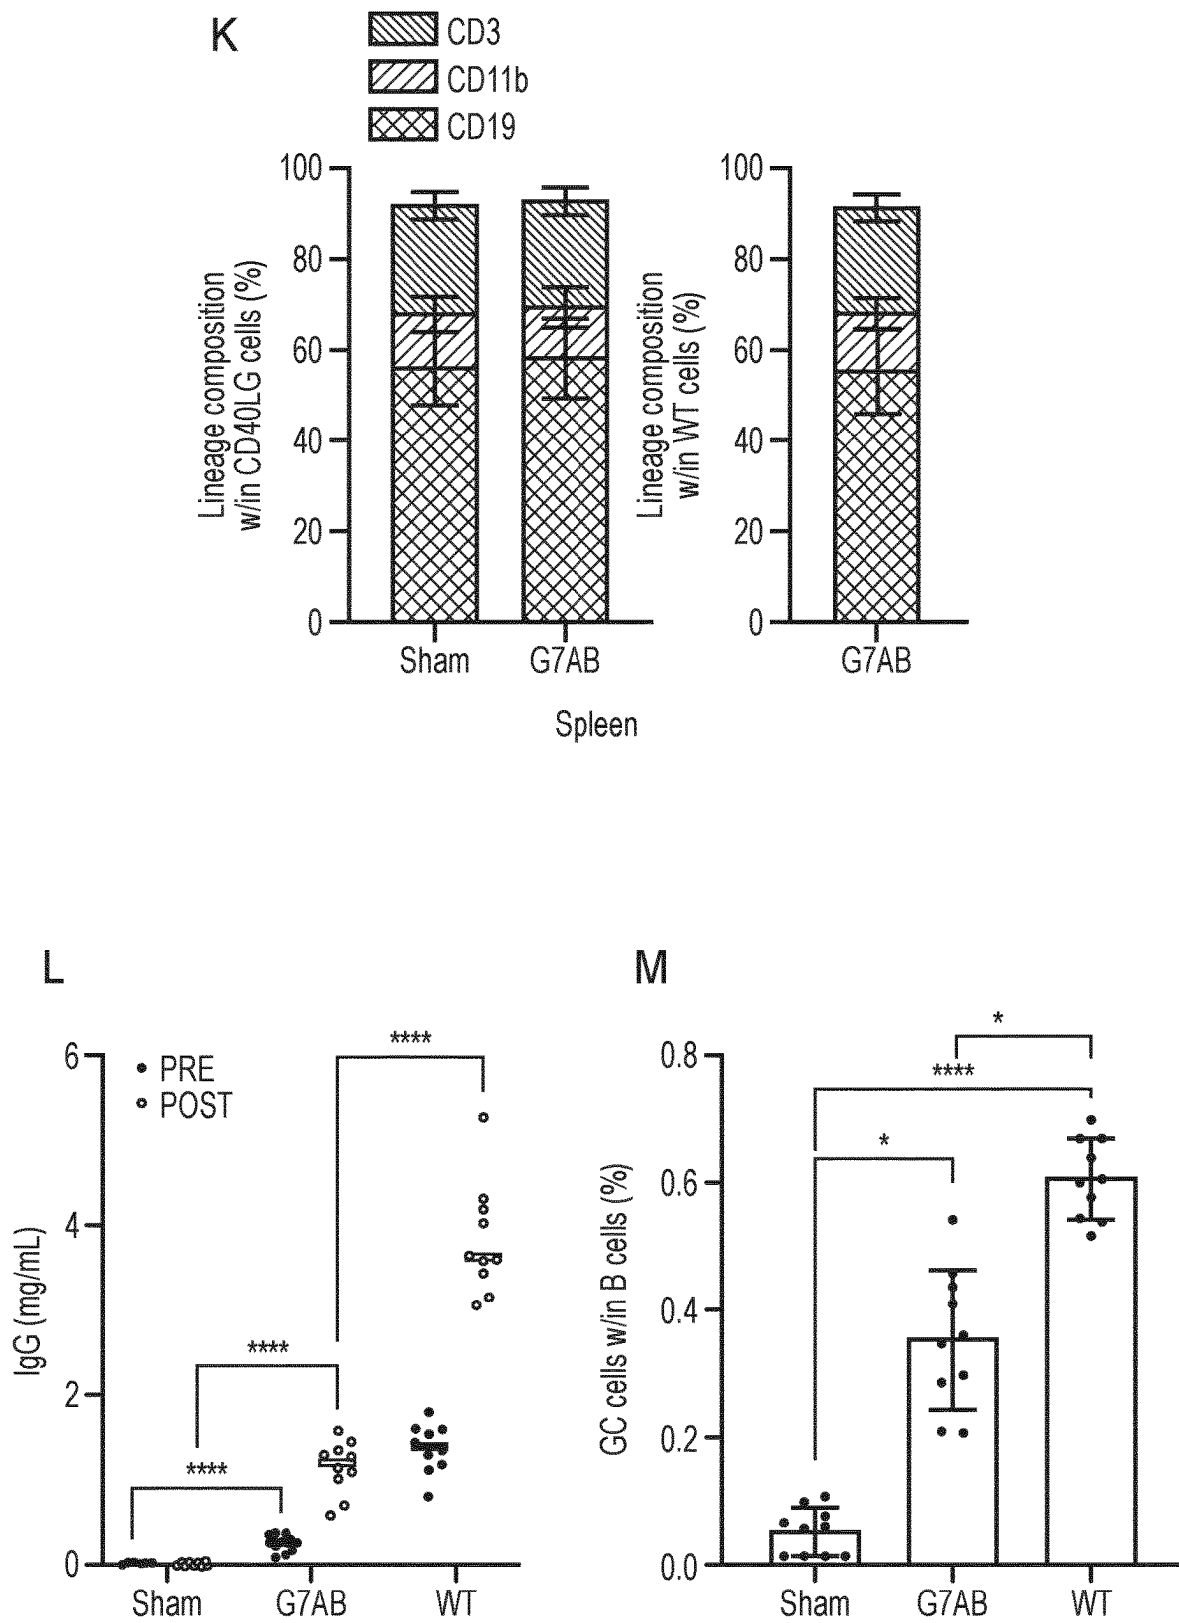


FIG. 2 (continued)

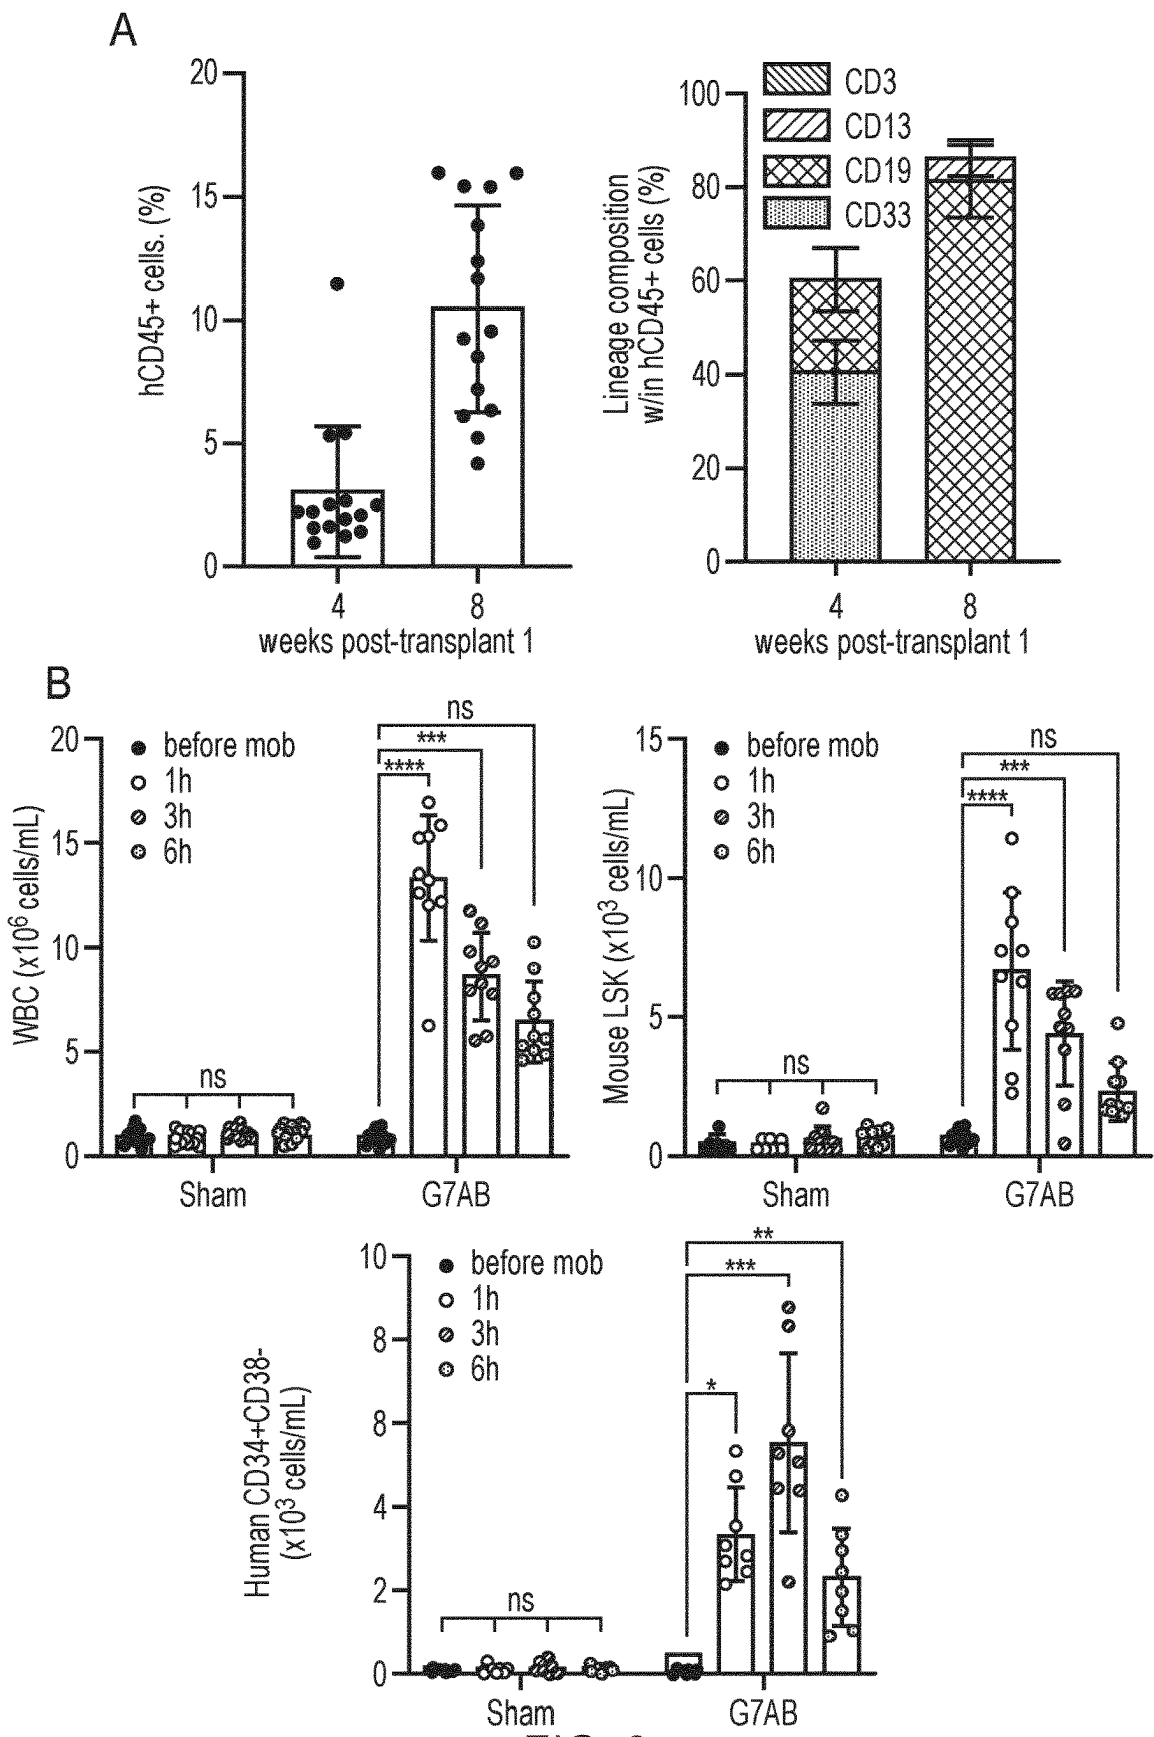

C

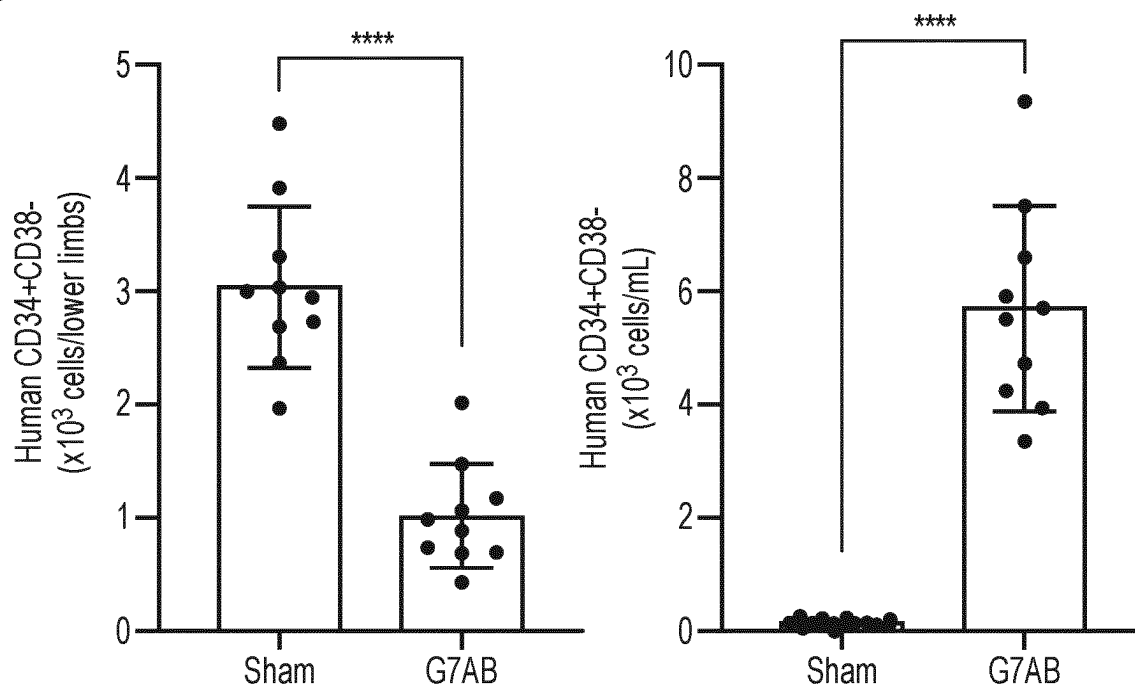


FIG. 3 (continued)

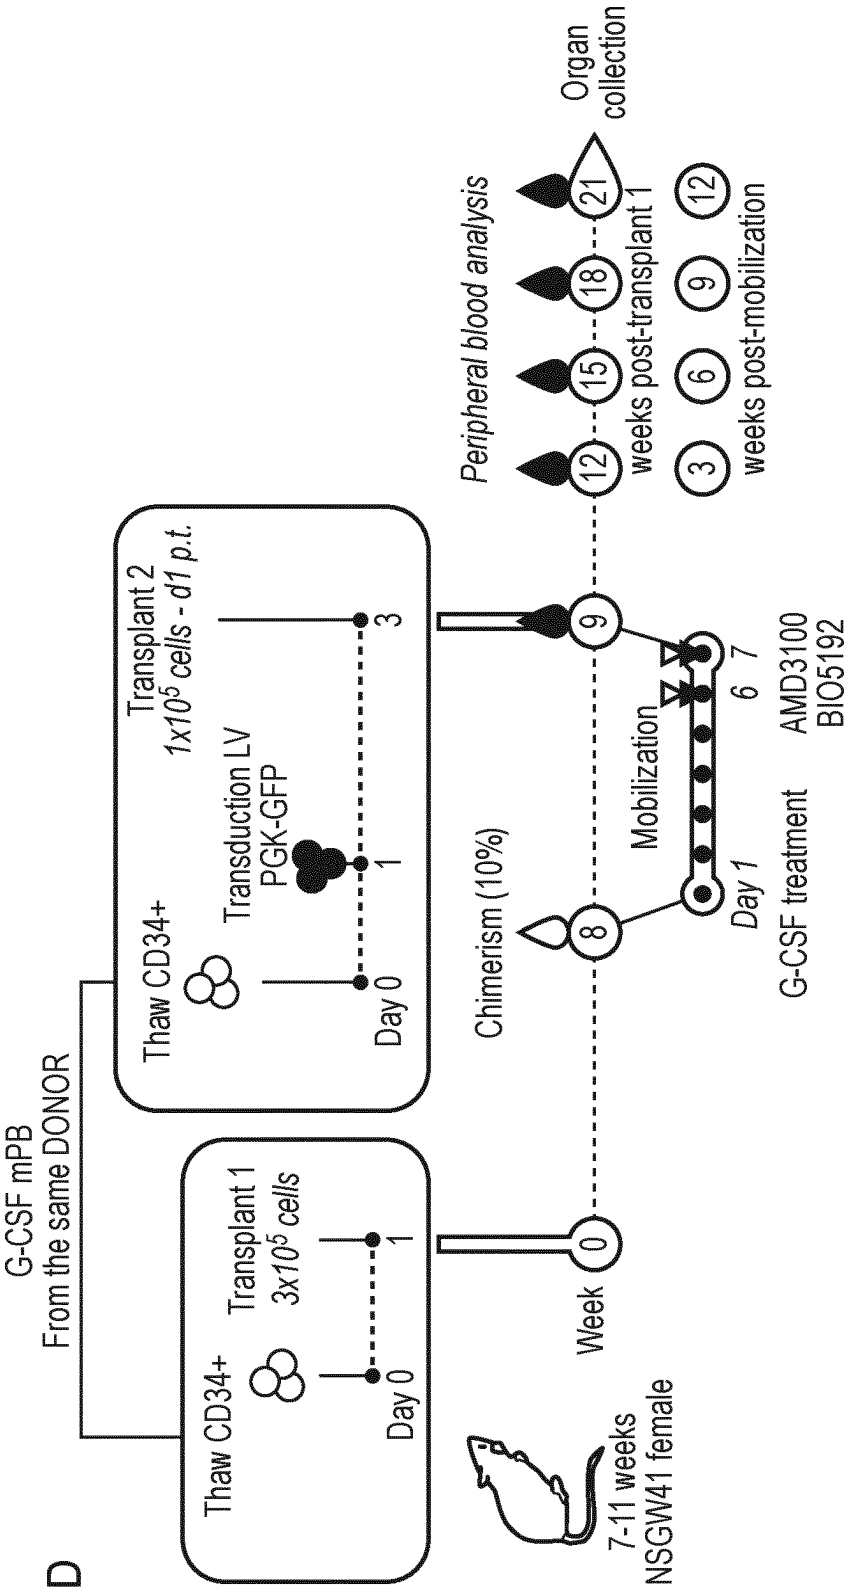


FIG. 3 (continued)

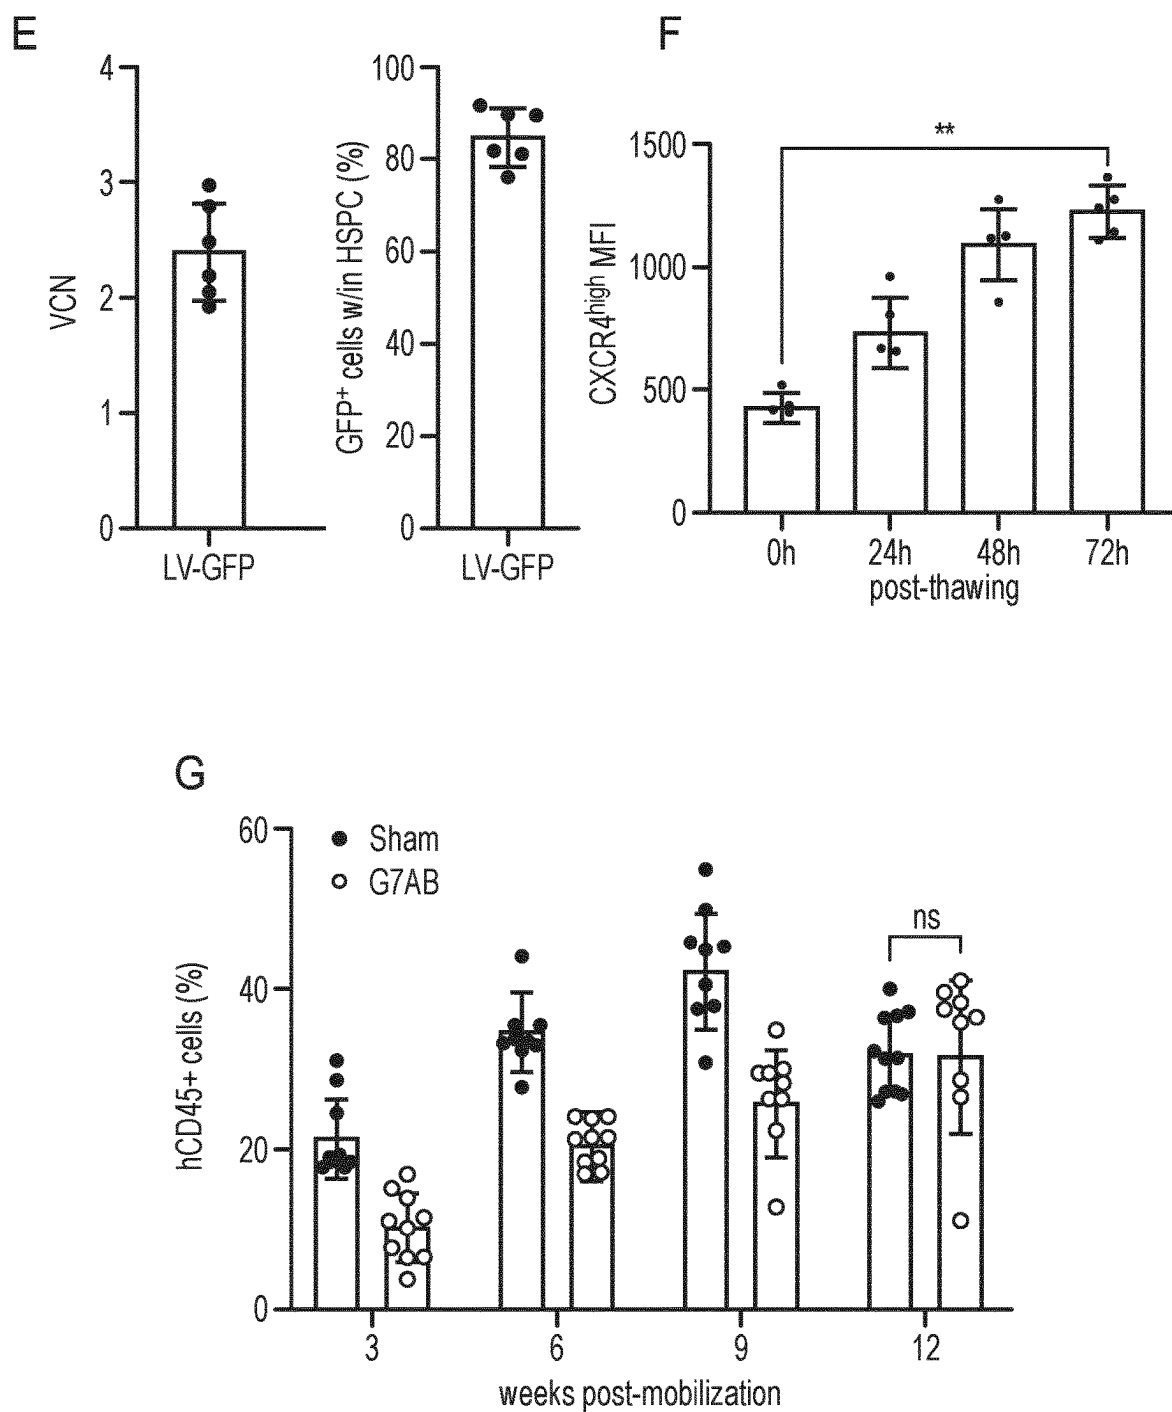


FIG. 3 (continued)

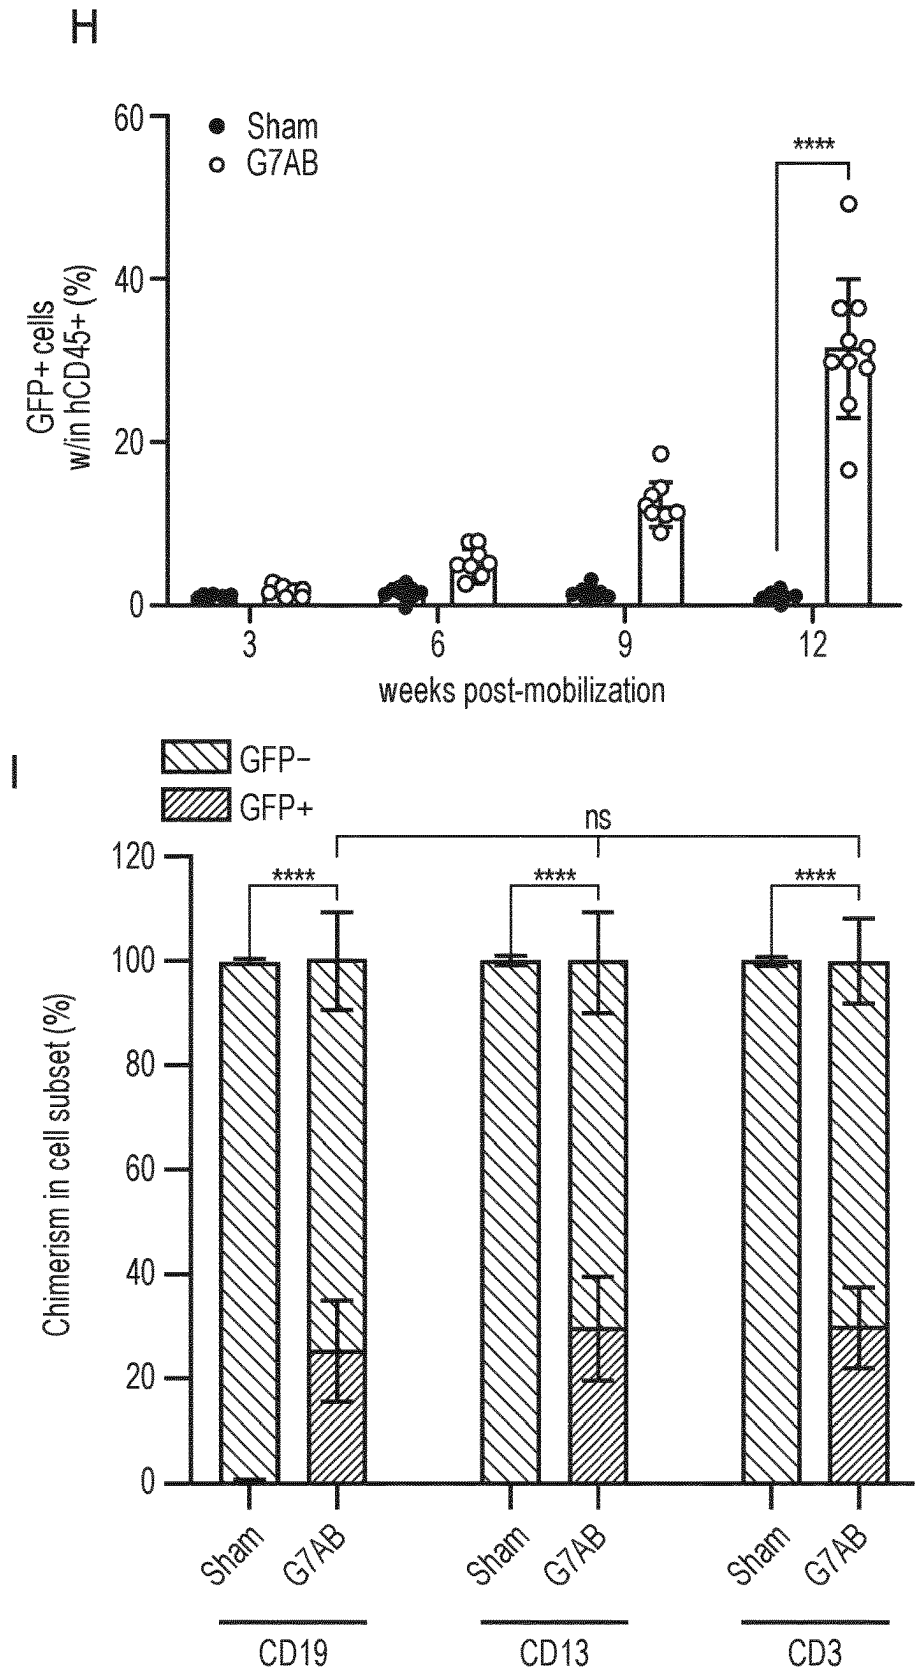


FIG. 3 (continued)

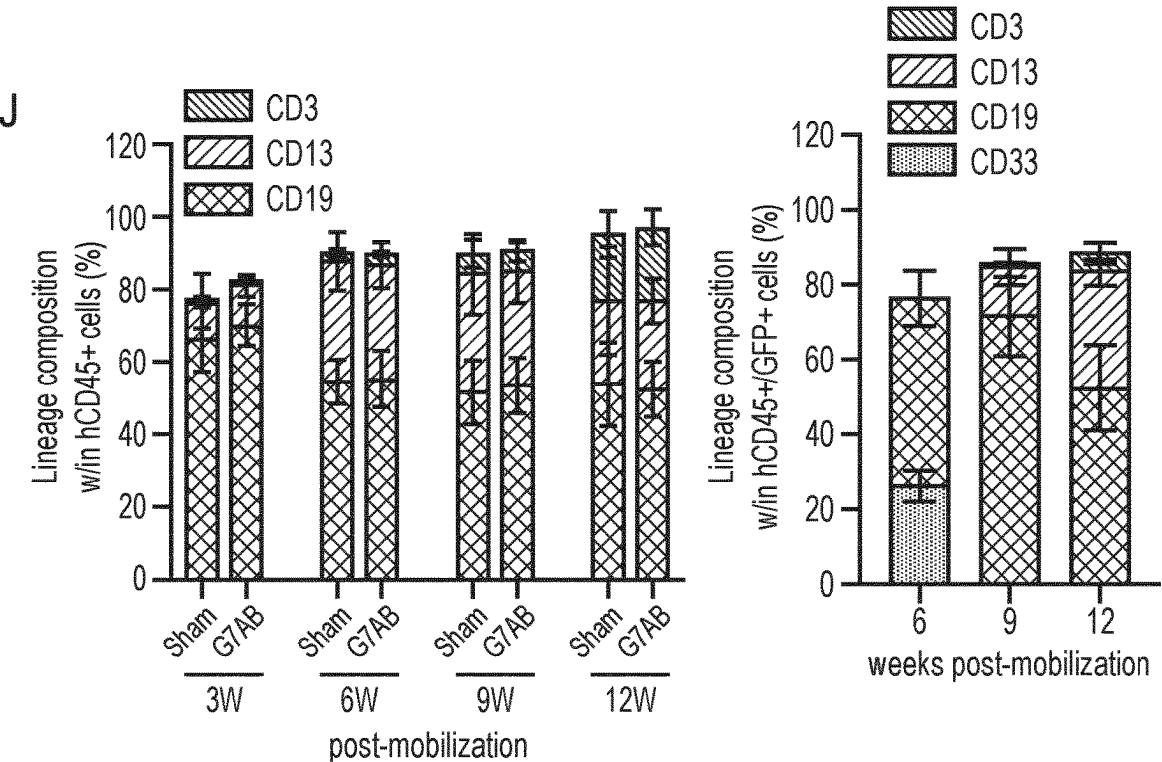


FIG. 3 (continued)

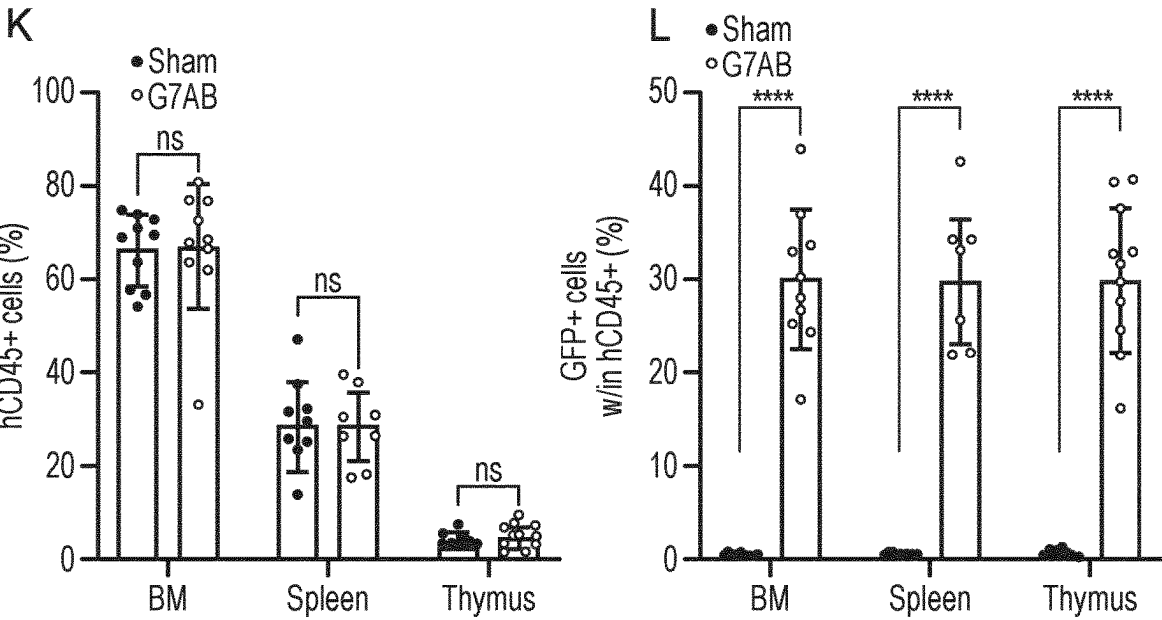


FIG. 3 (continued)

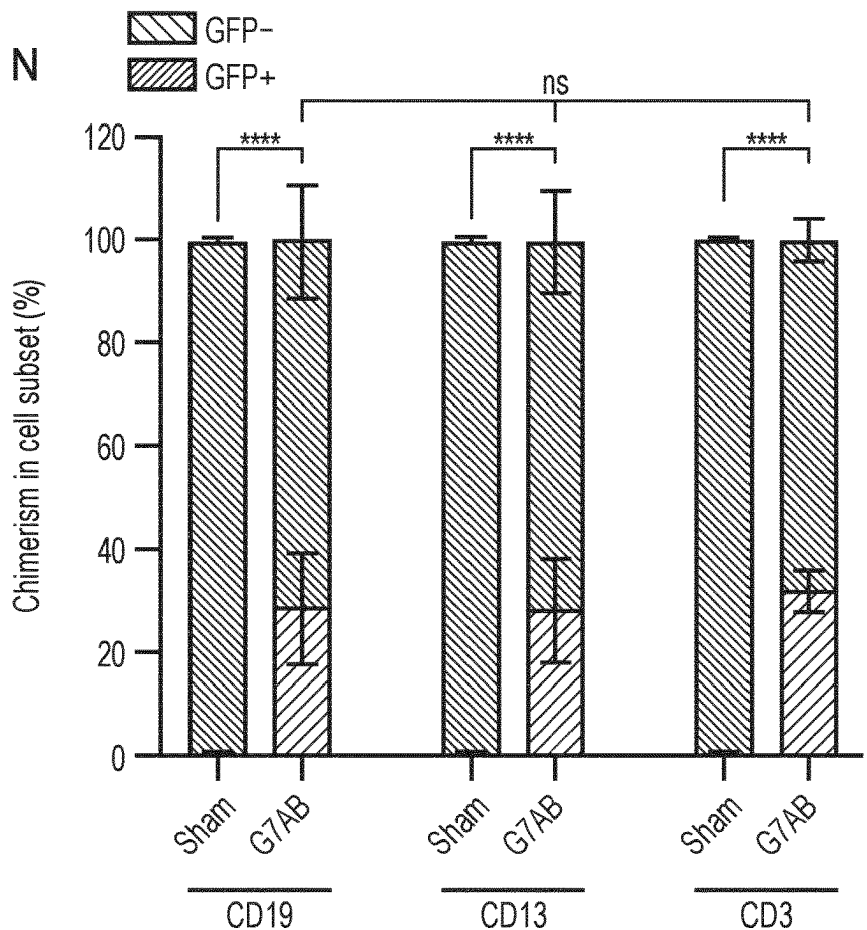
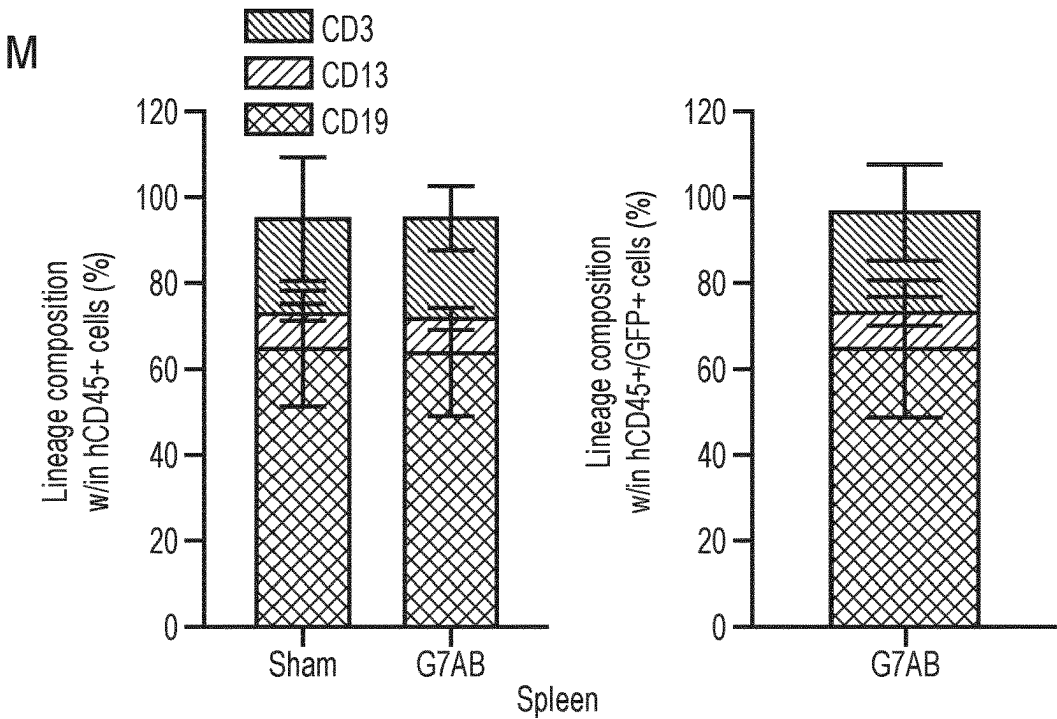


FIG. 3 (continued)

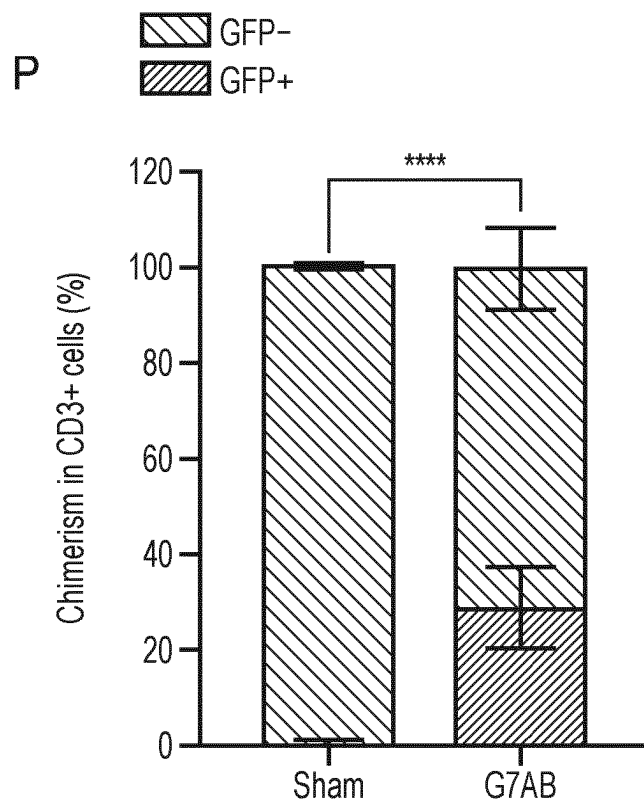
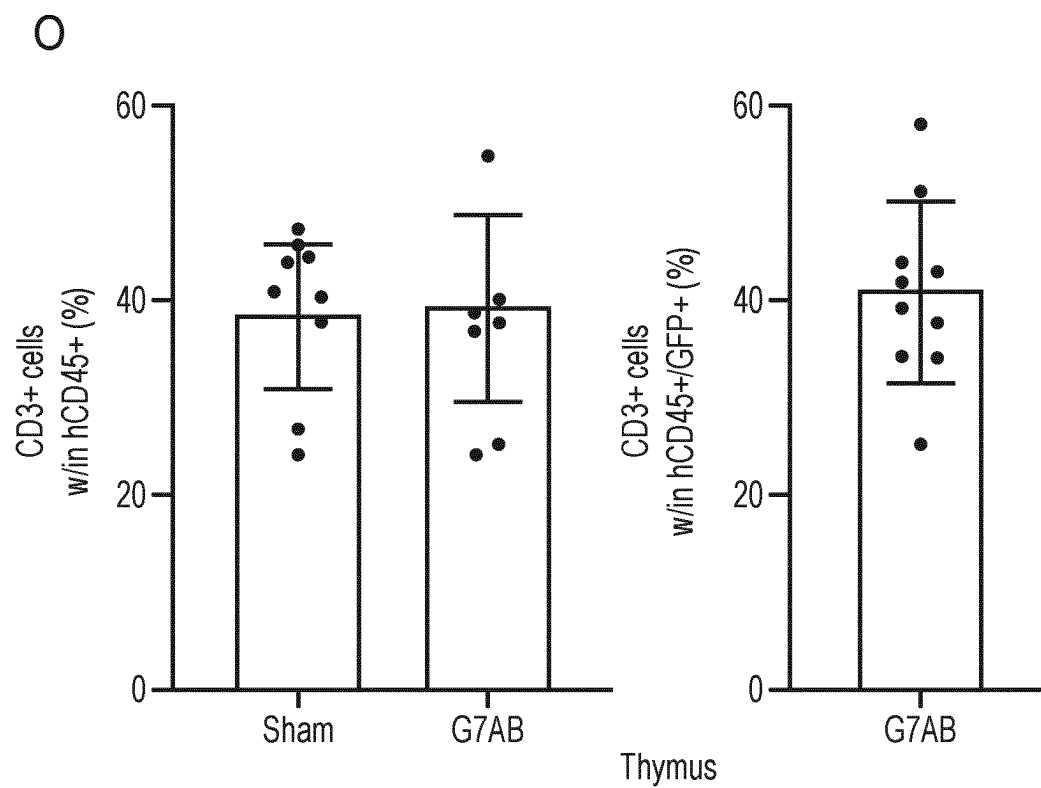


FIG. 3 (continued)

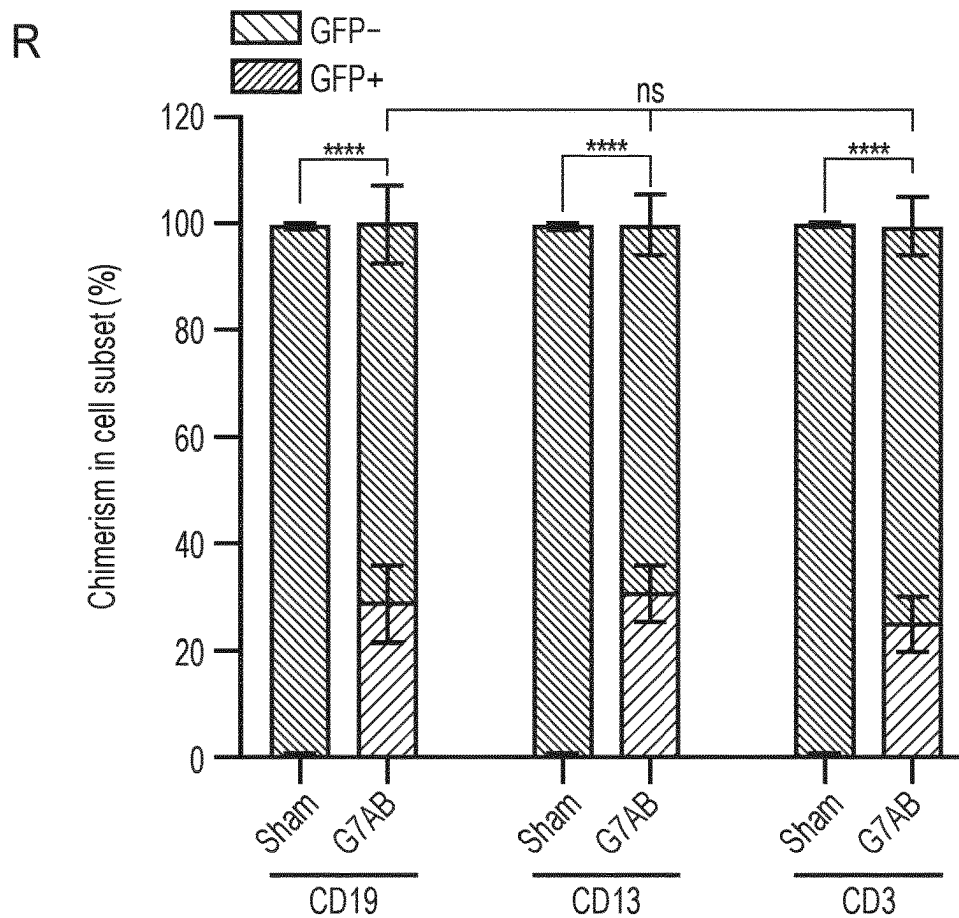
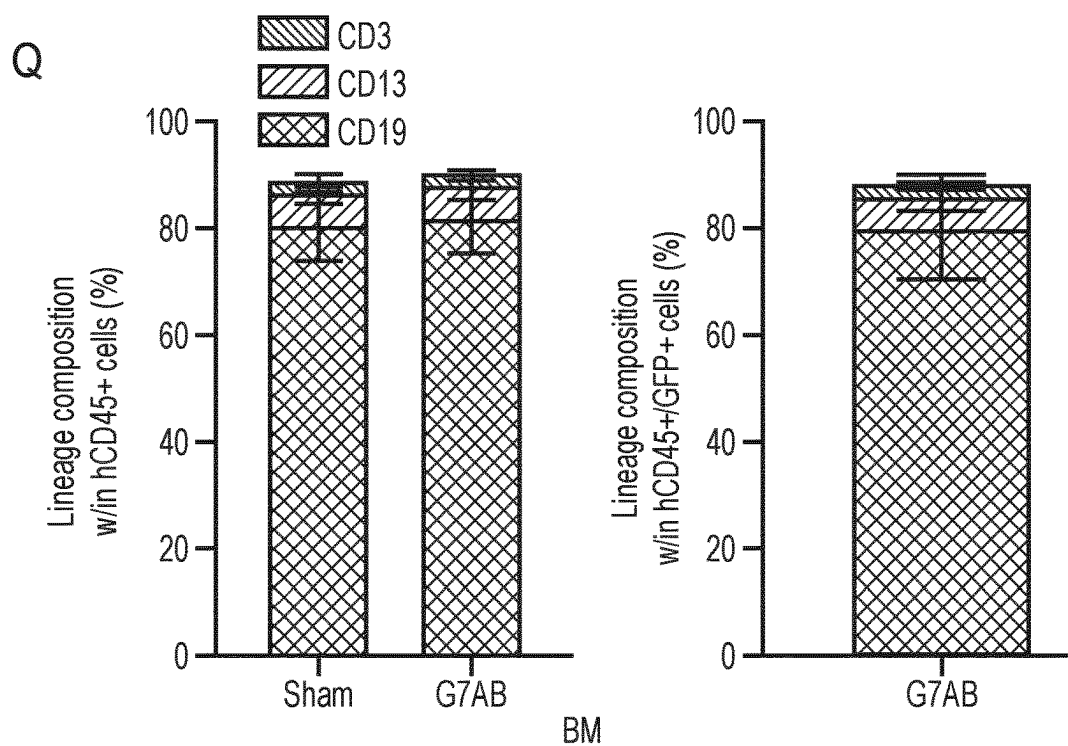


FIG. 3 (continued)

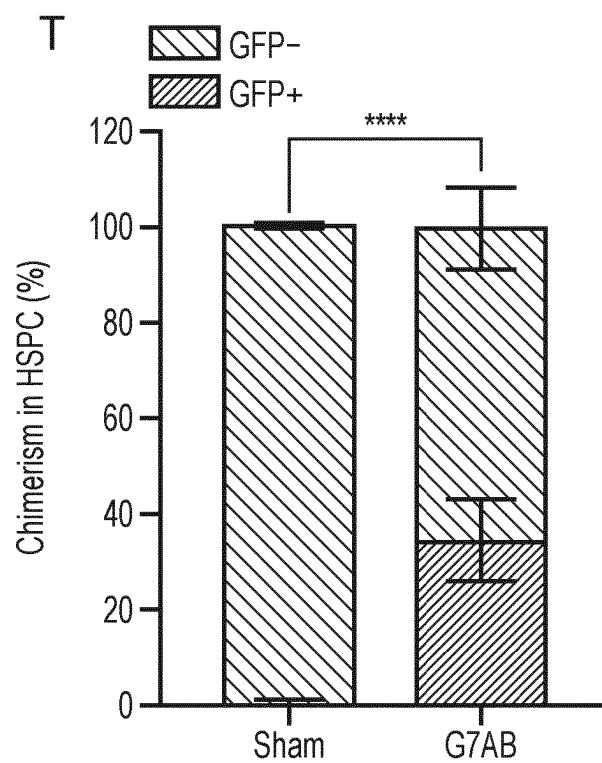
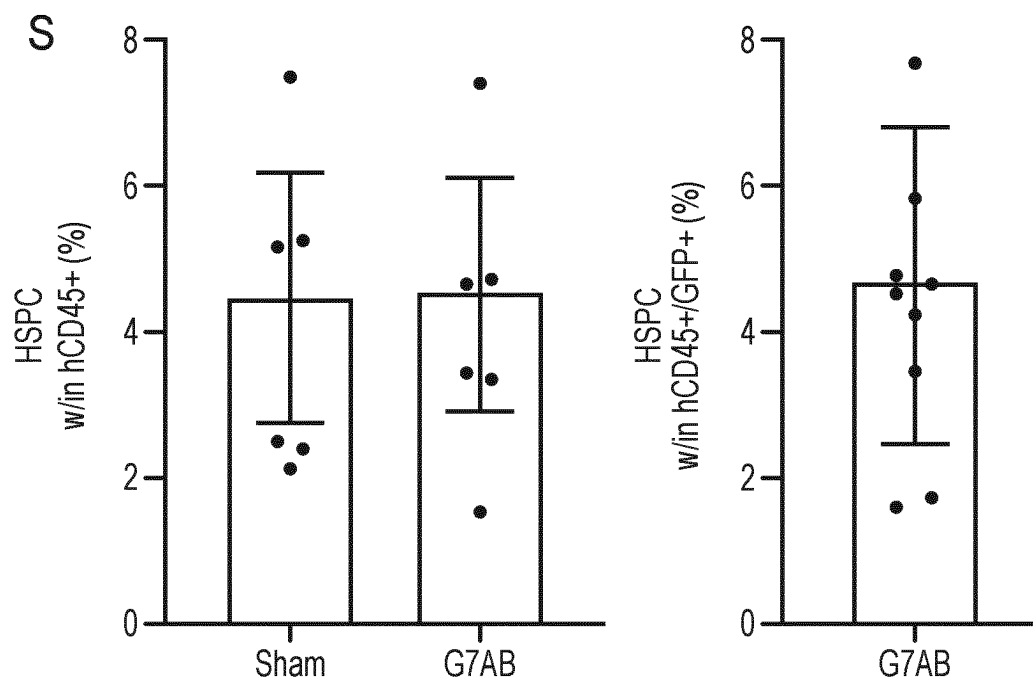


FIG. 3 (continued)

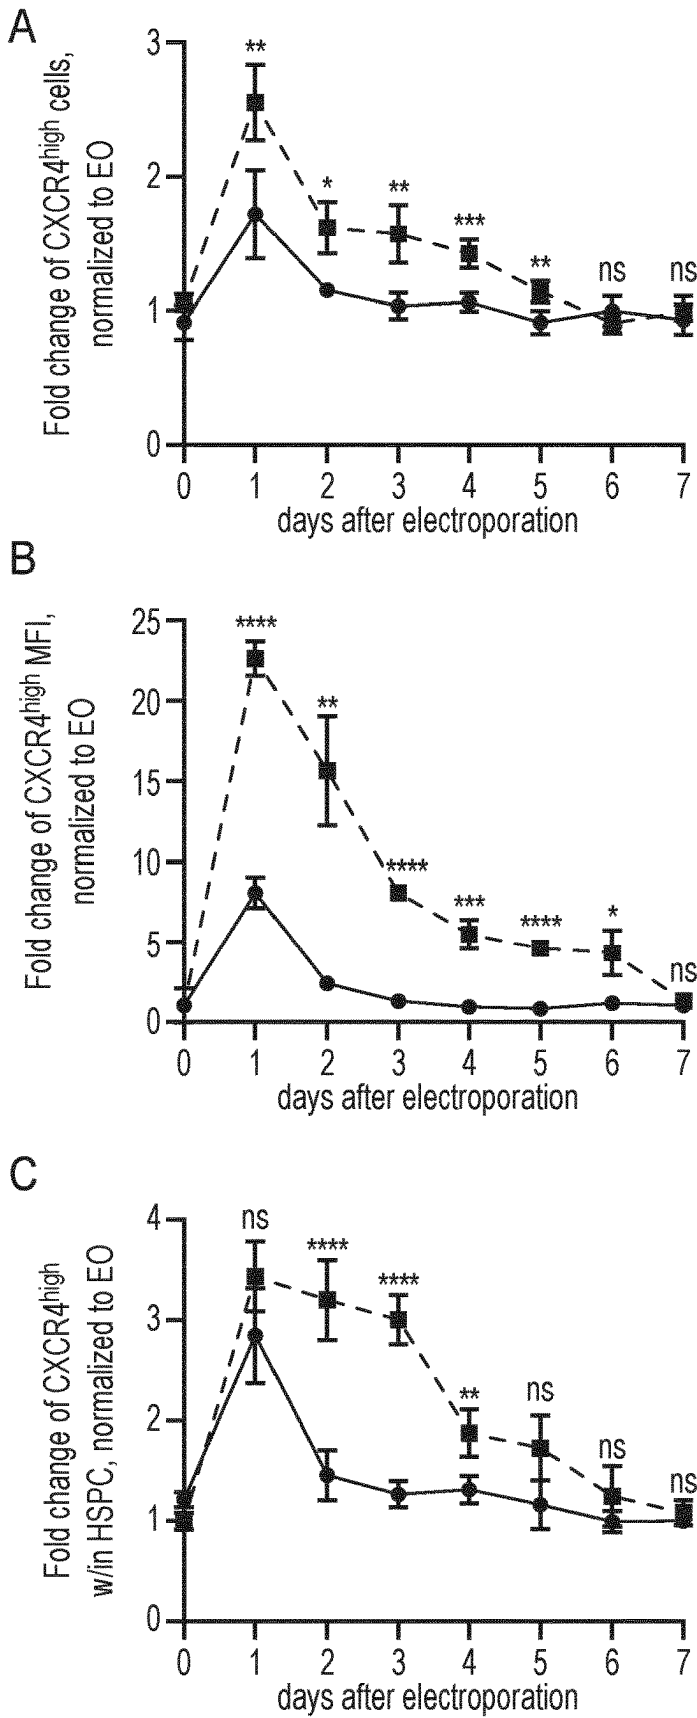


FIG. 4

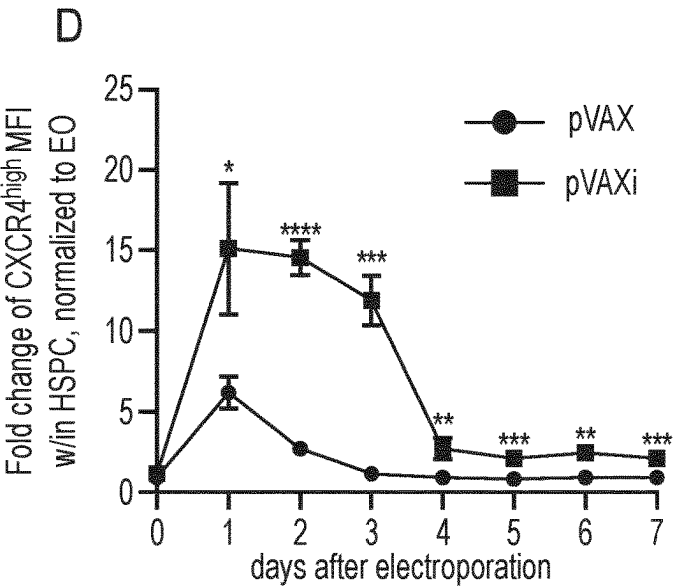


FIG. 4


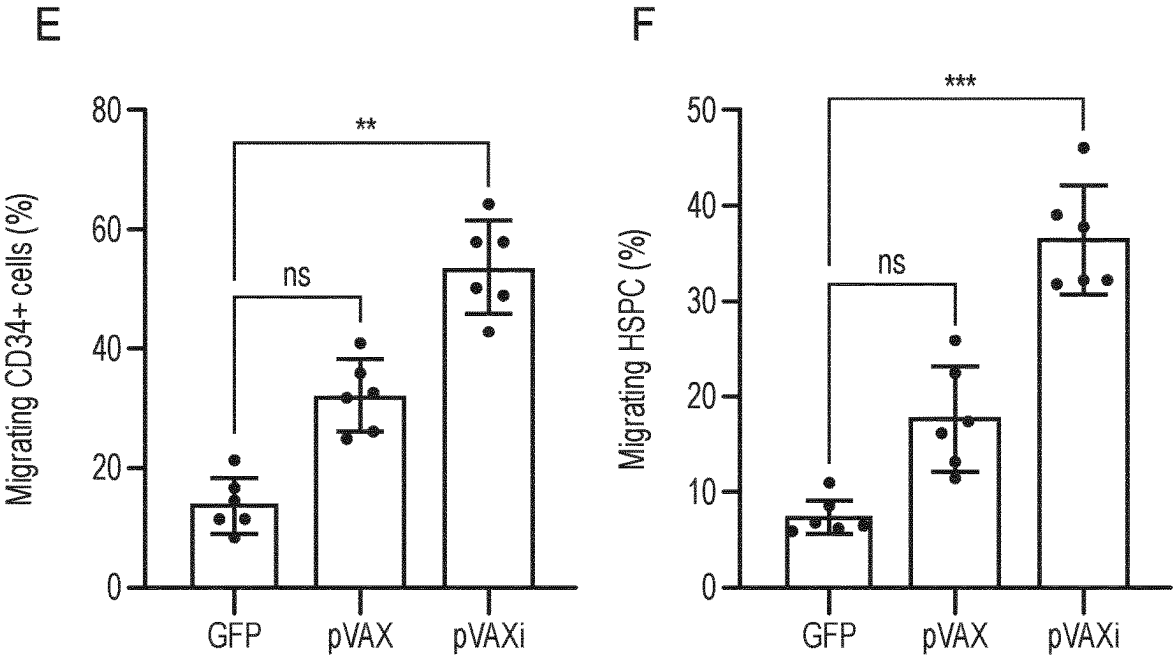


FIG. 4 (continued)

G

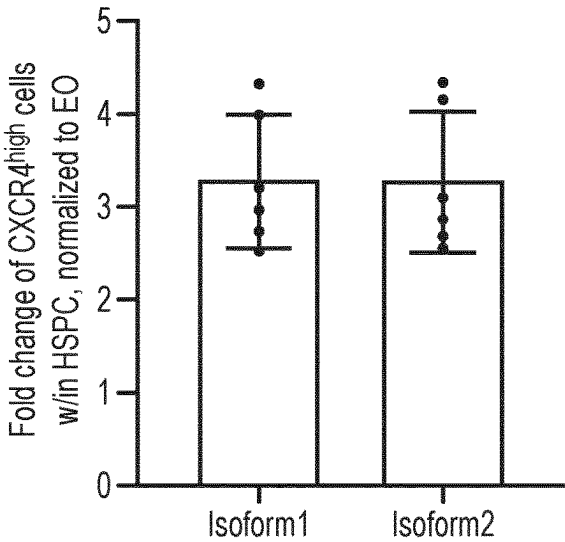

H

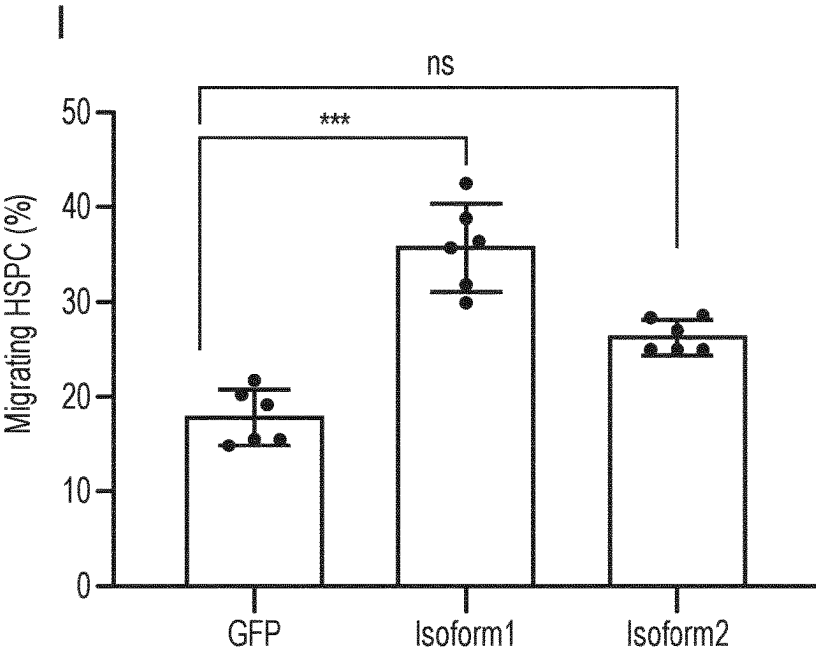
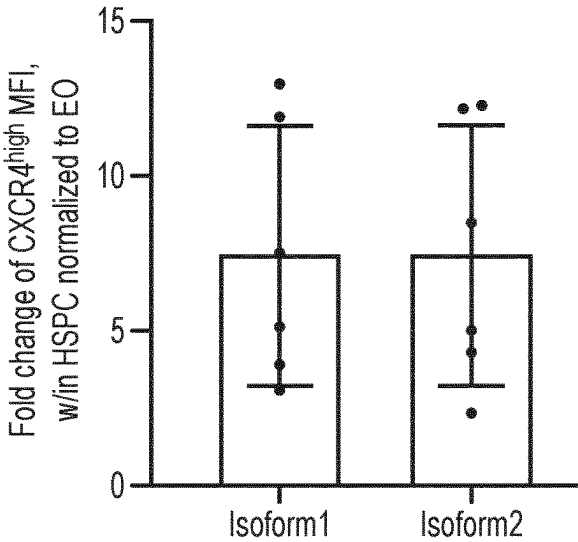


FIG. 4 (continued)

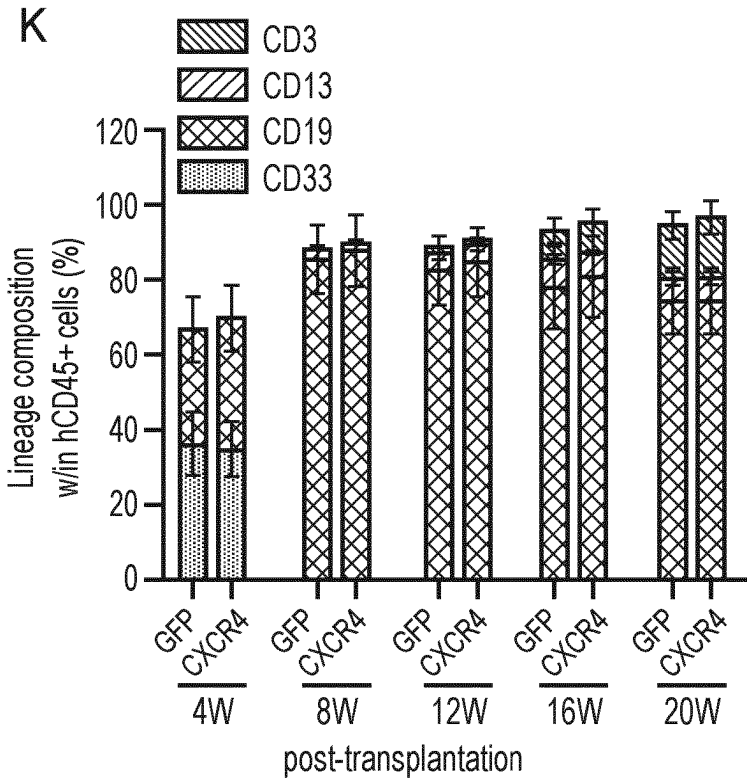
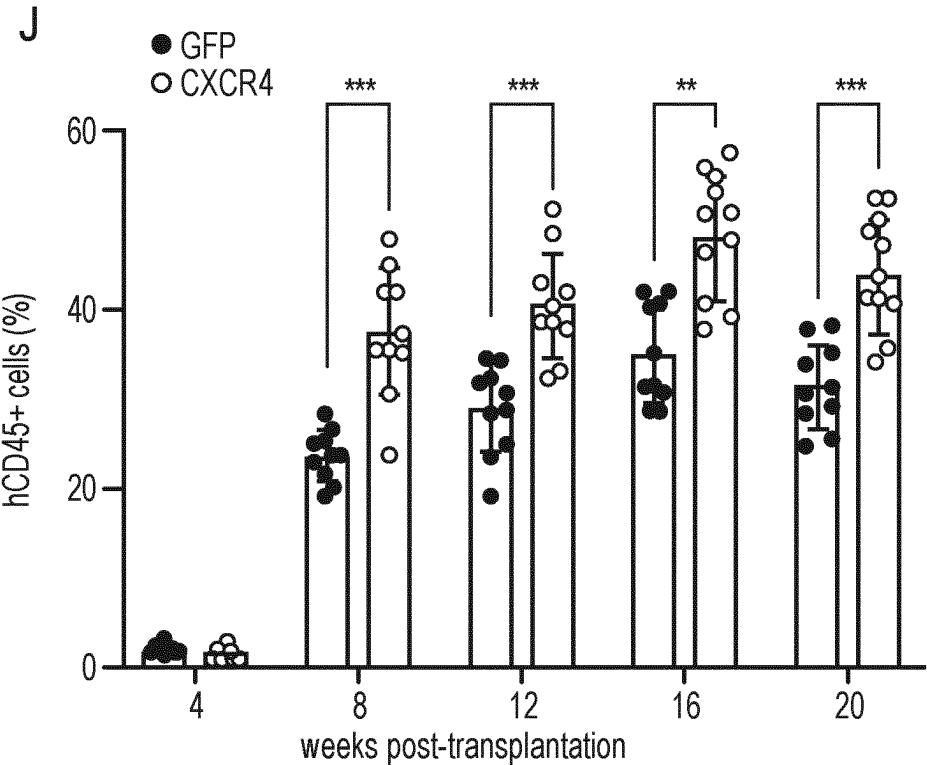


FIG. 4 (continued)

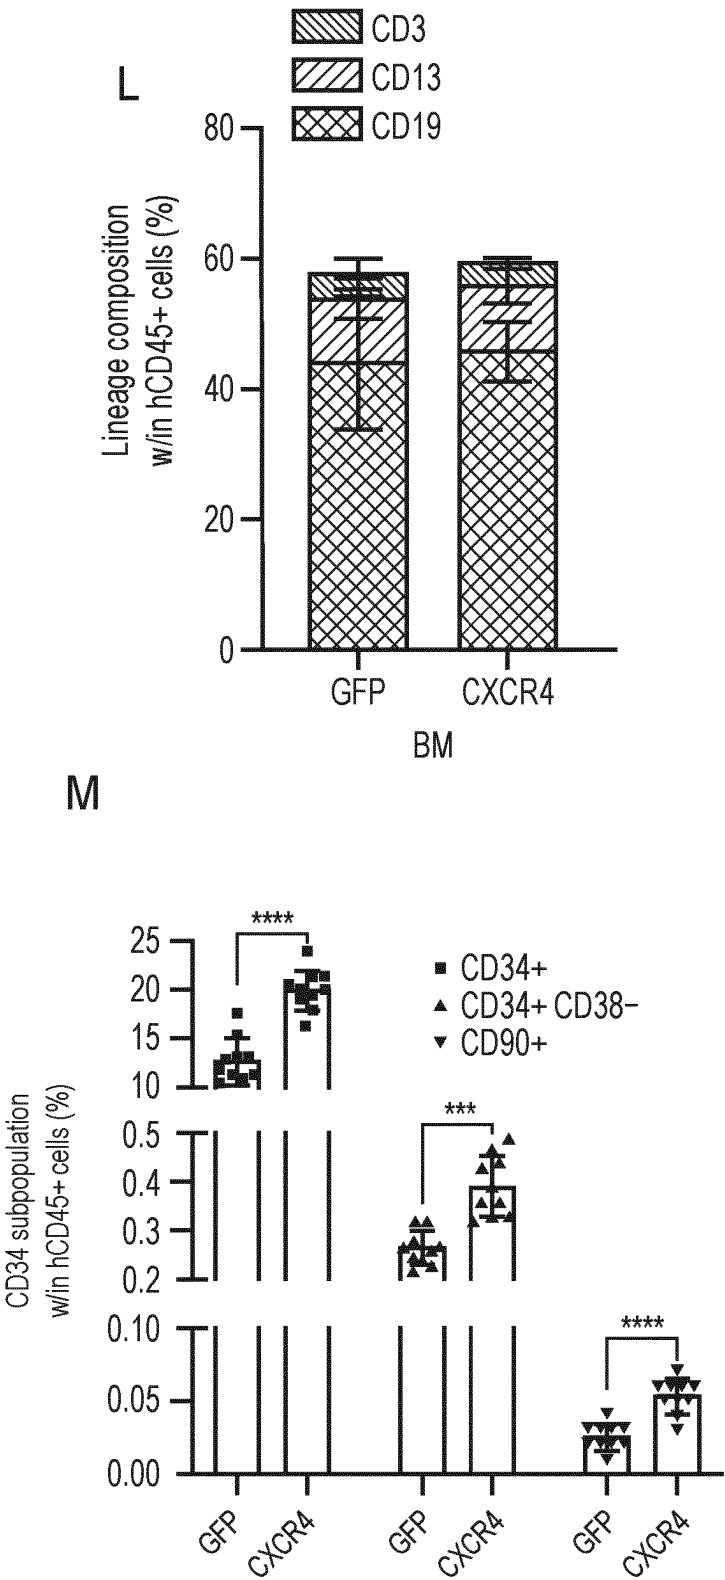


FIG. 4 (continued)

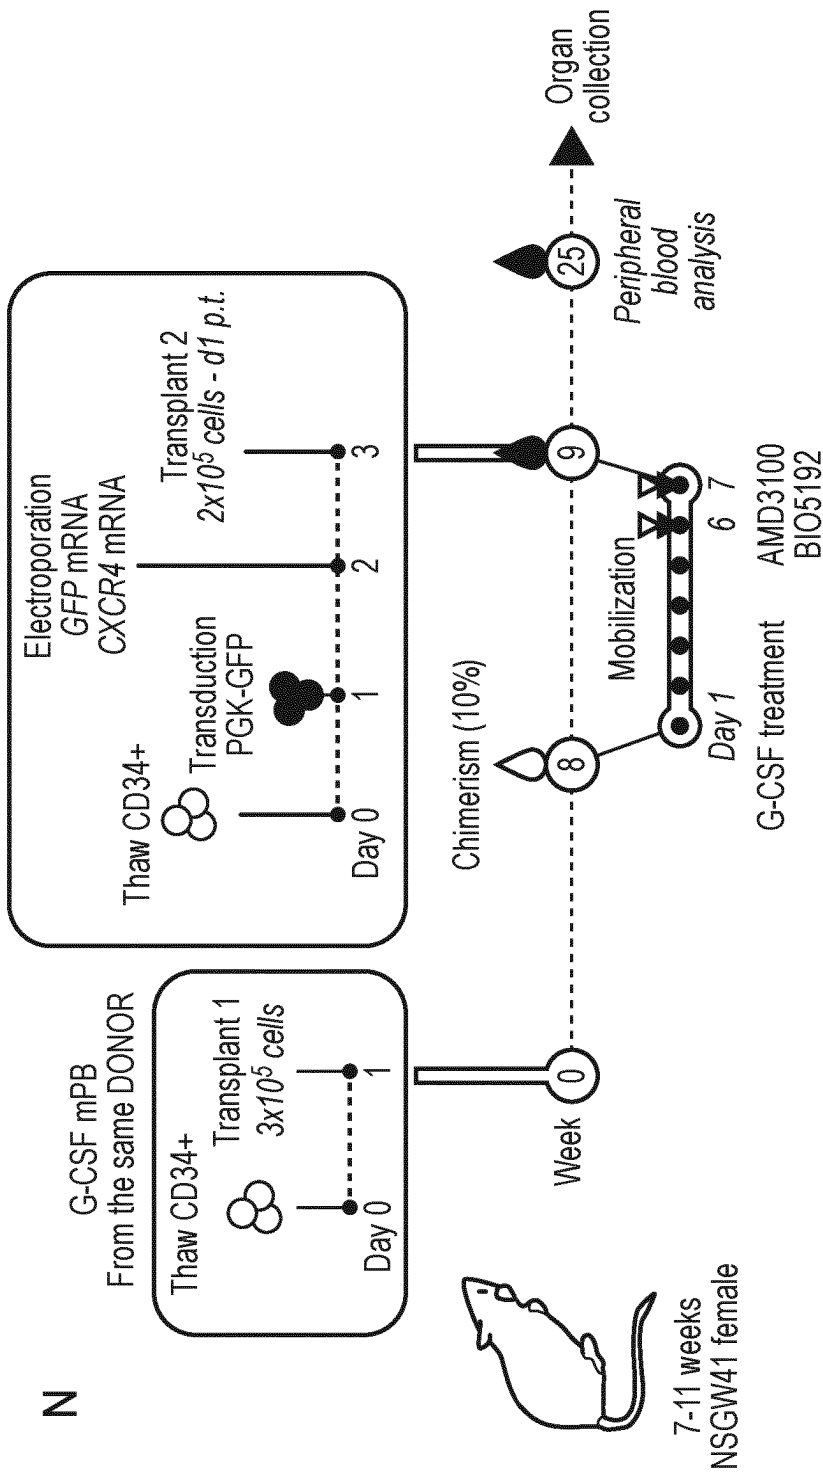


FIG. 4 (continued)

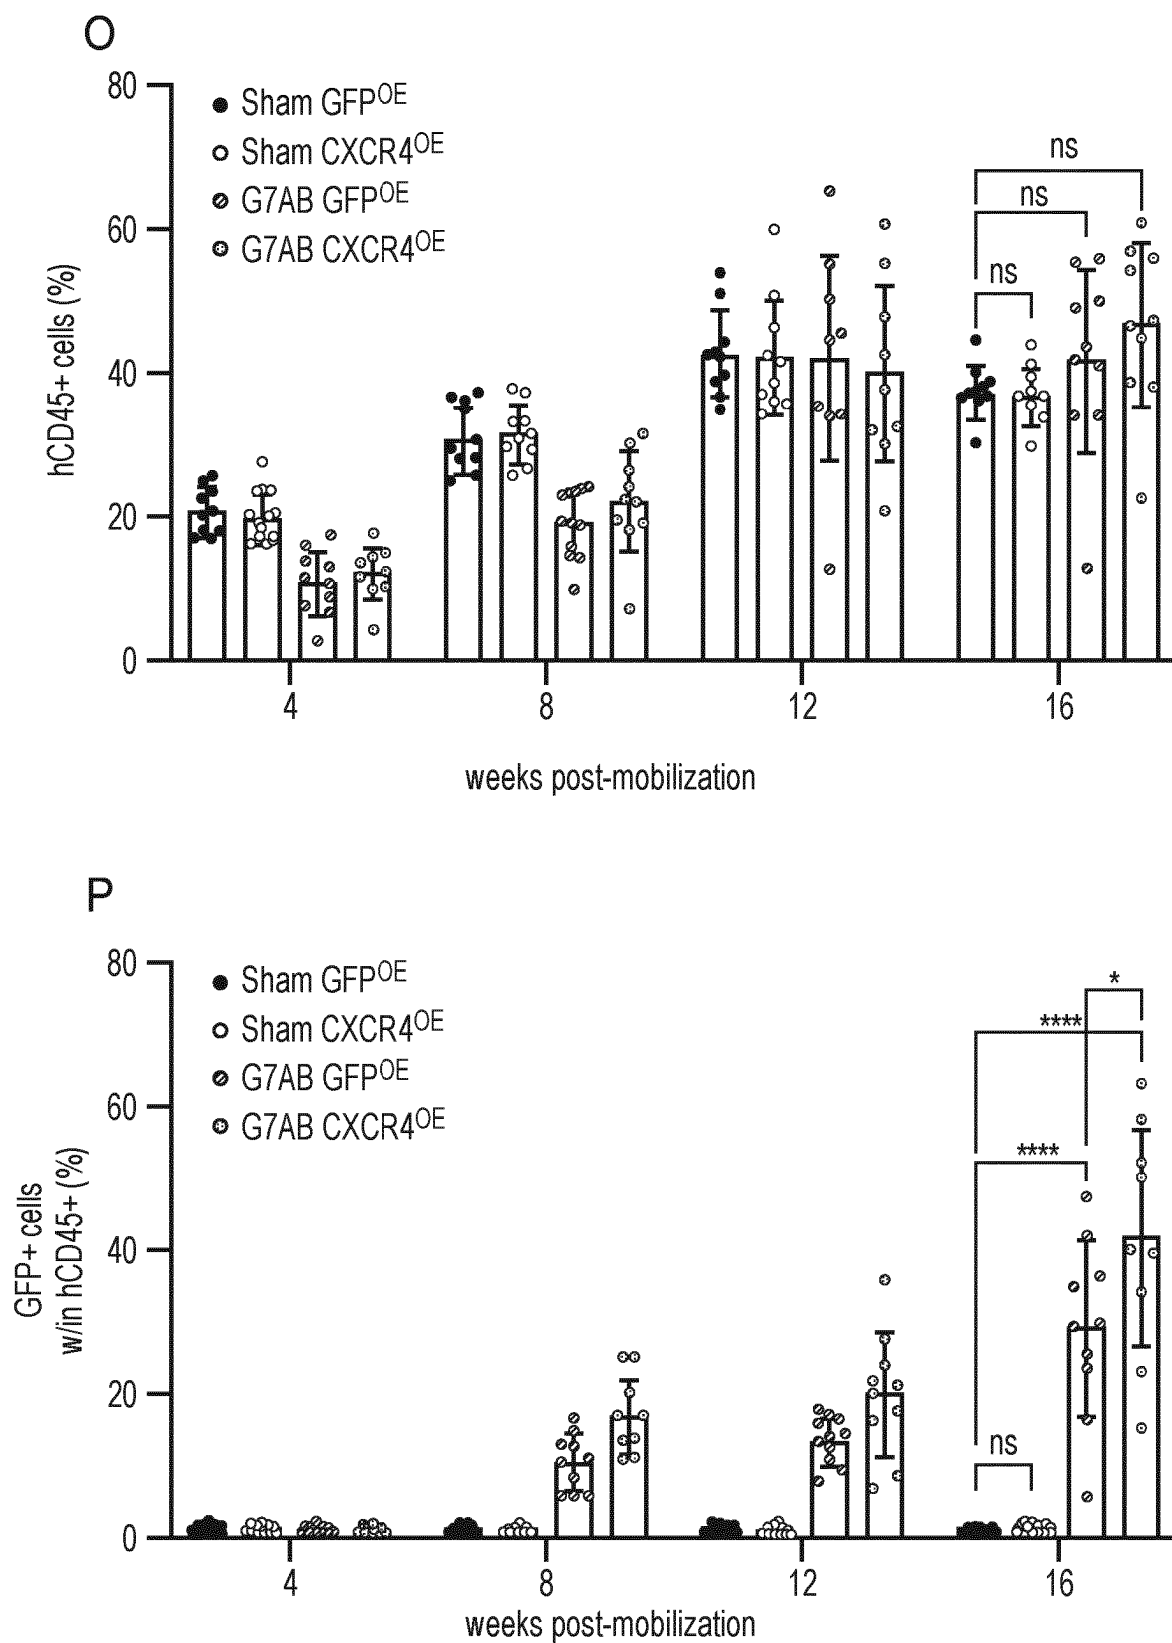


FIG. 4 (continued)

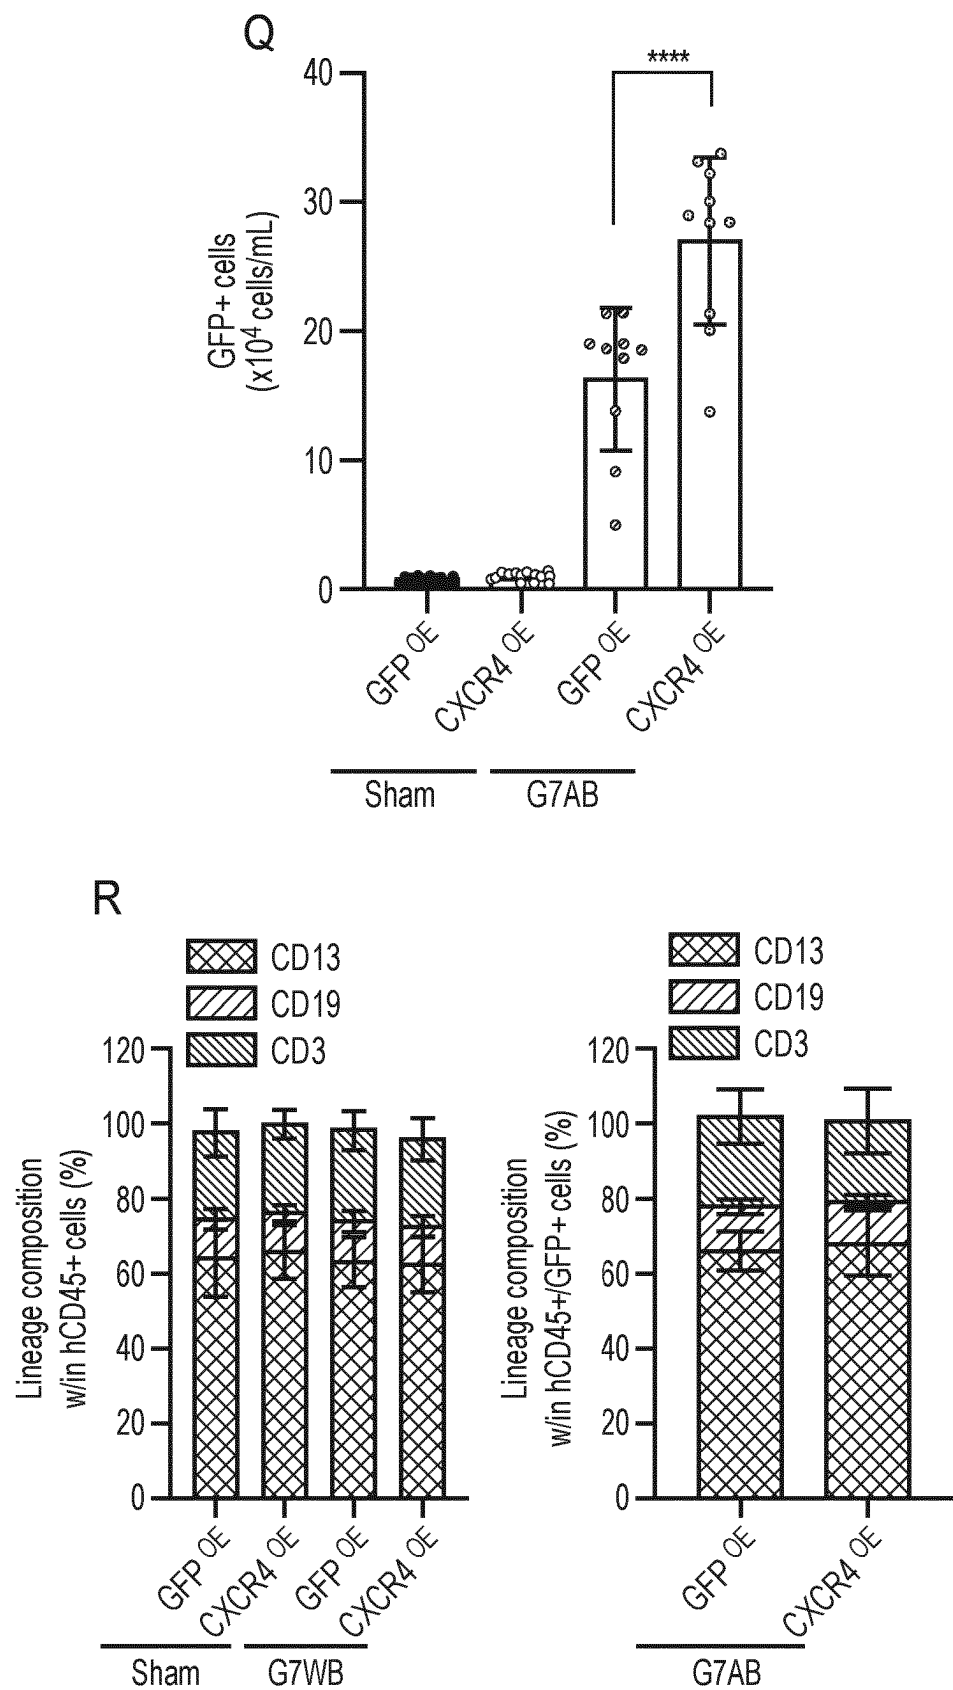


FIG. 4 (continued)

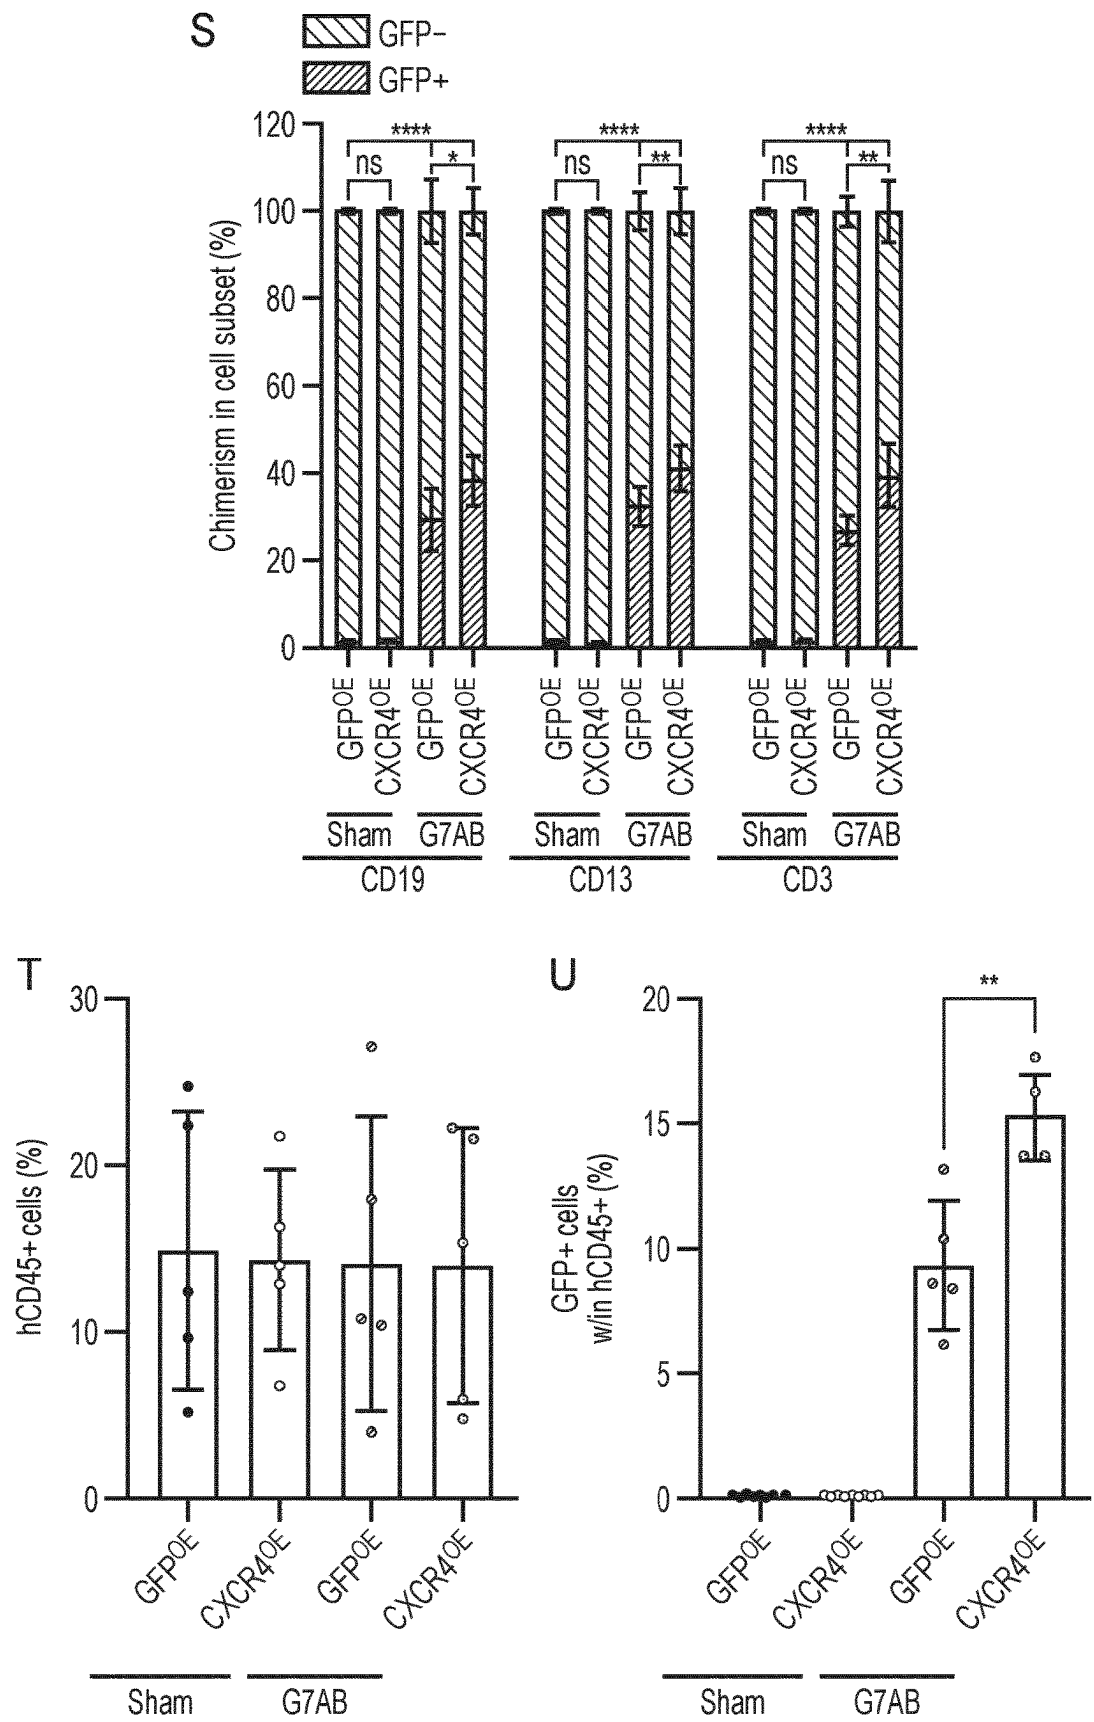


FIG. 4 (continued)

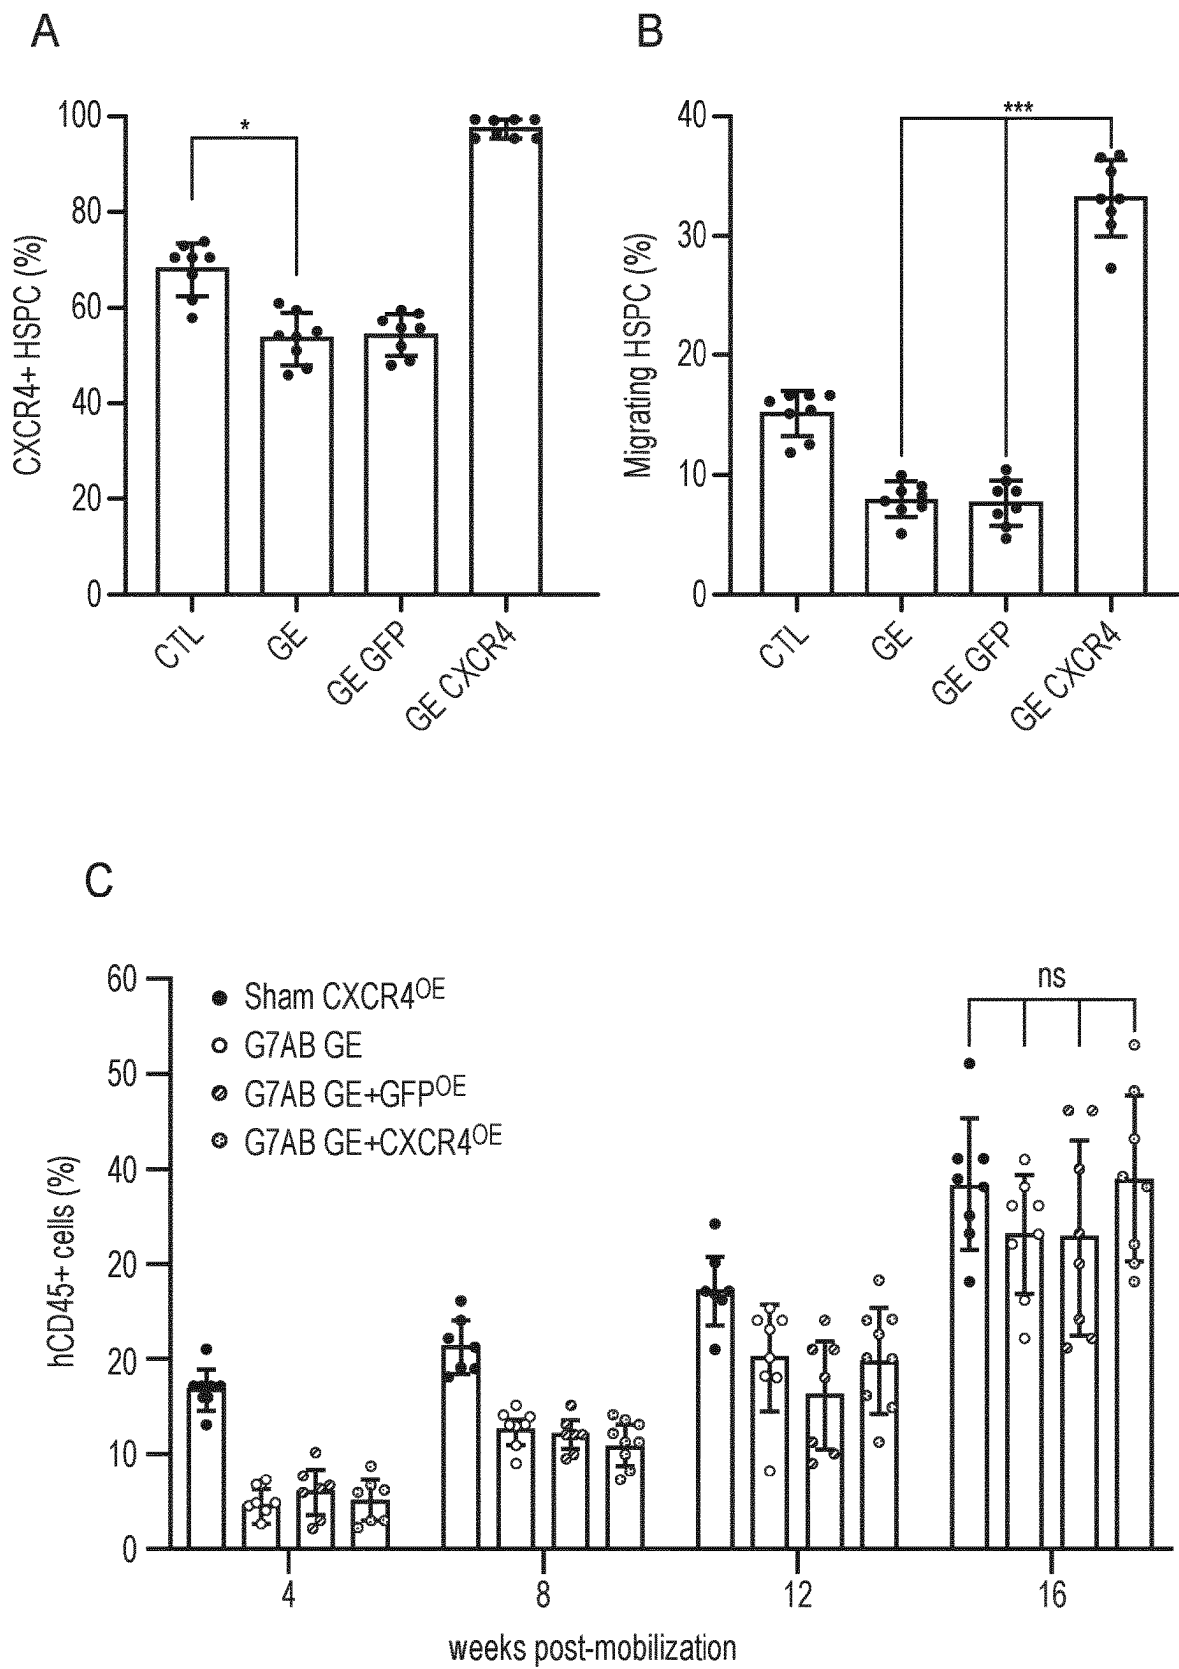


FIG. 5

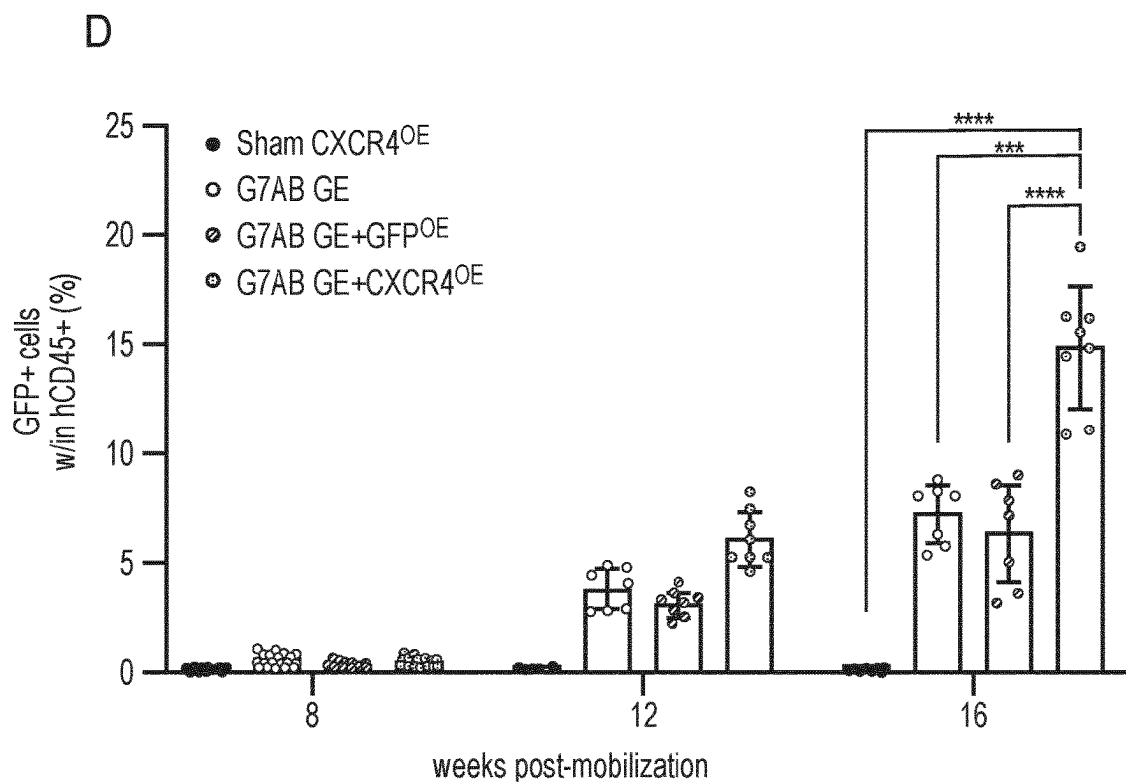


FIG. 5

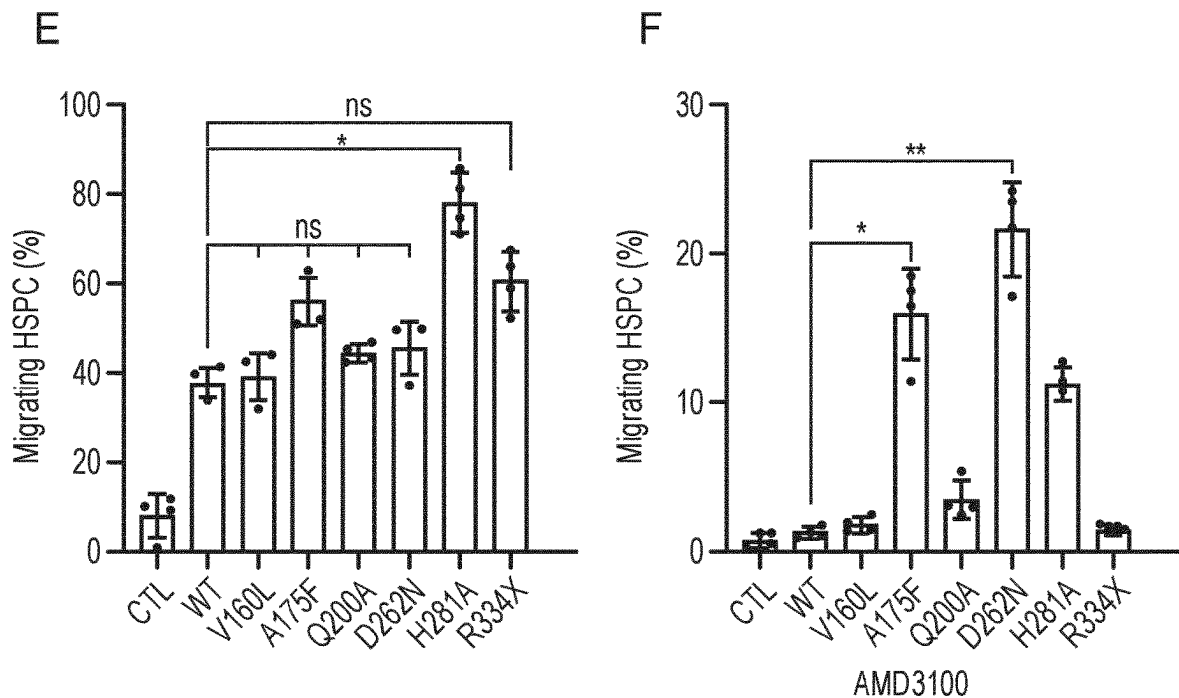


FIG. 5 (continued)

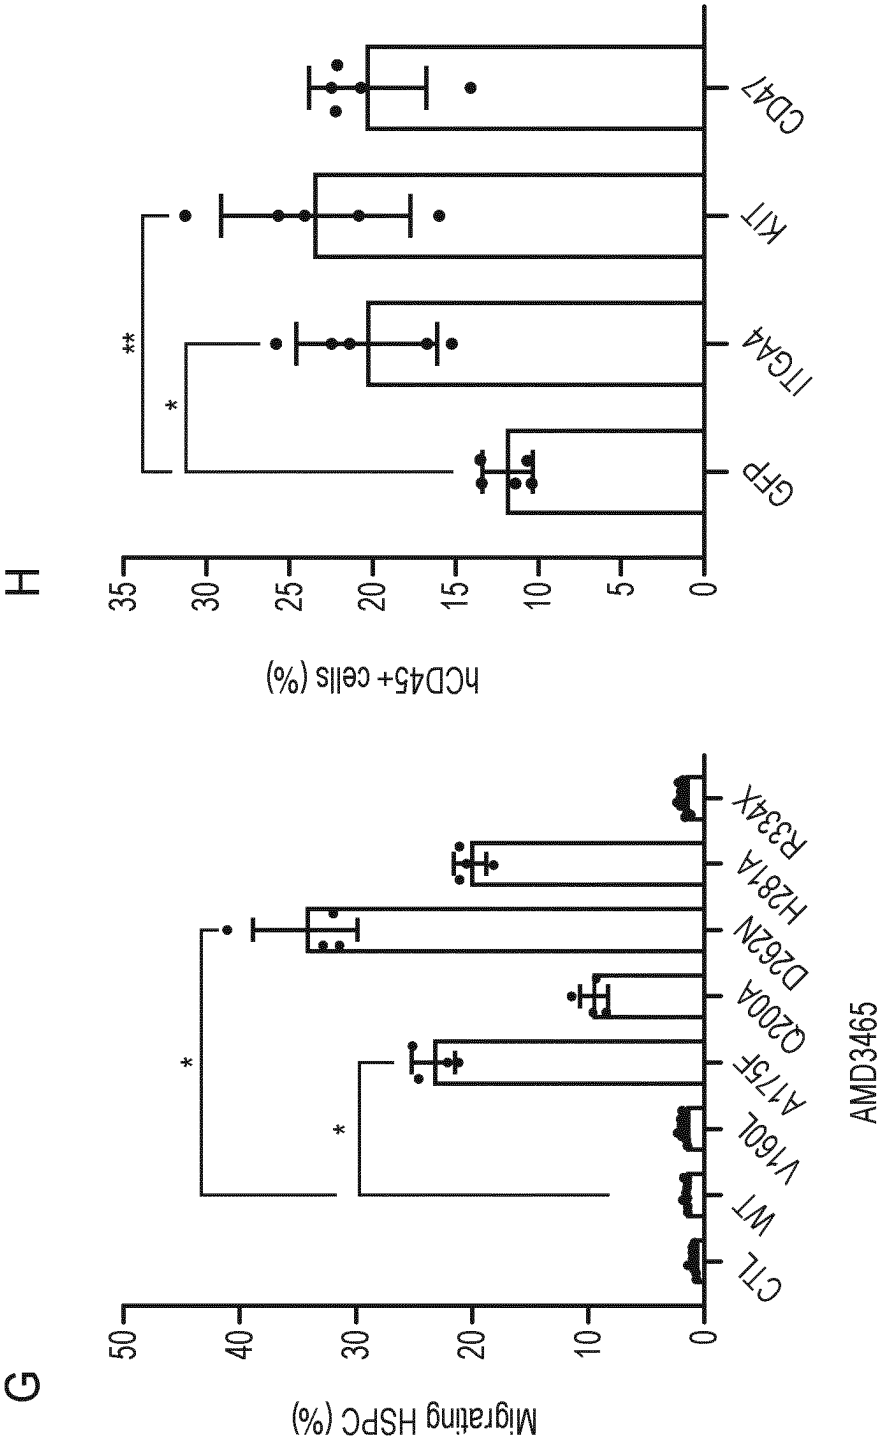


FIG. 5 (continued)

A

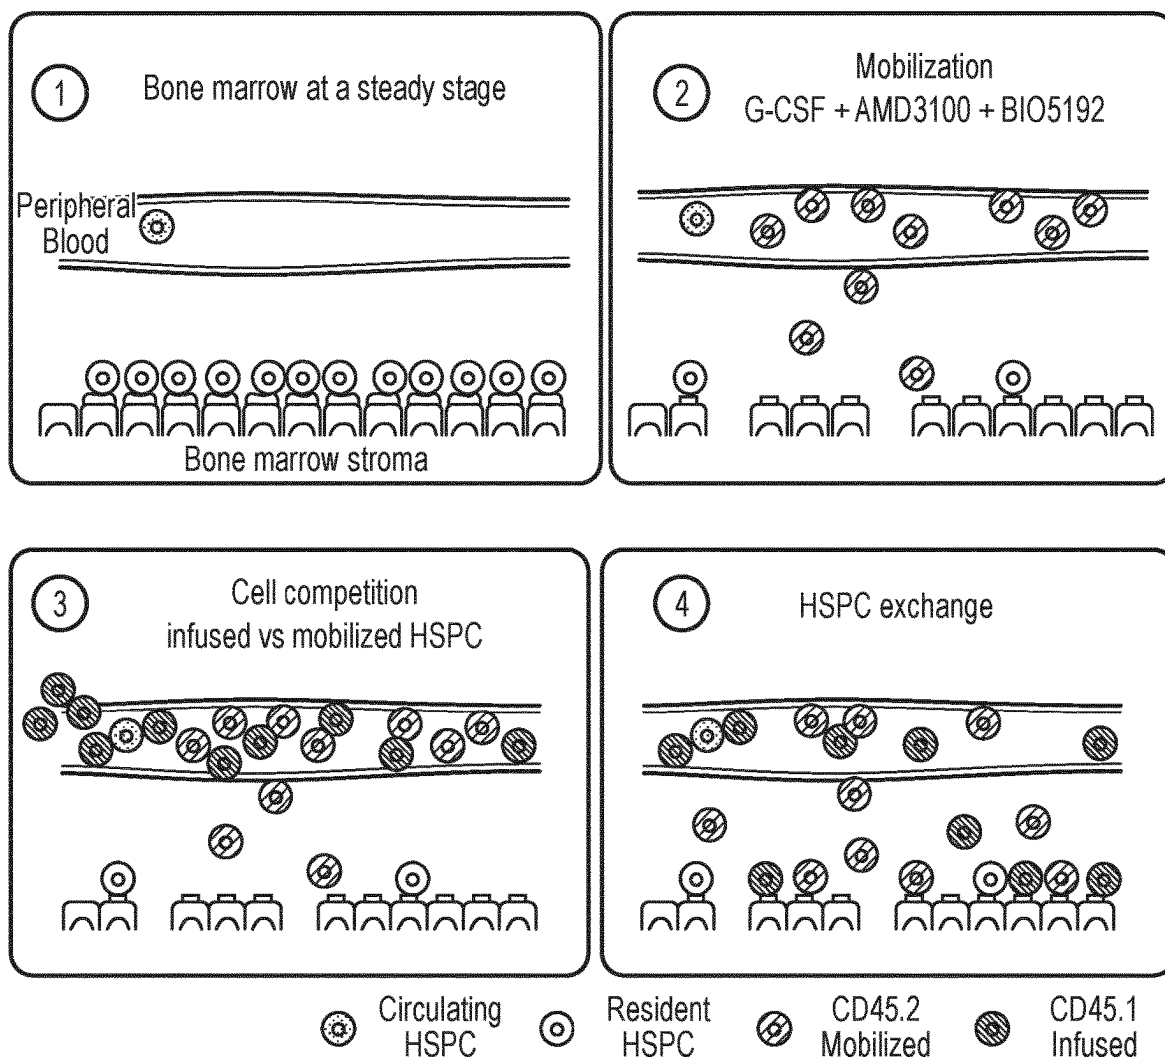


FIG. 6

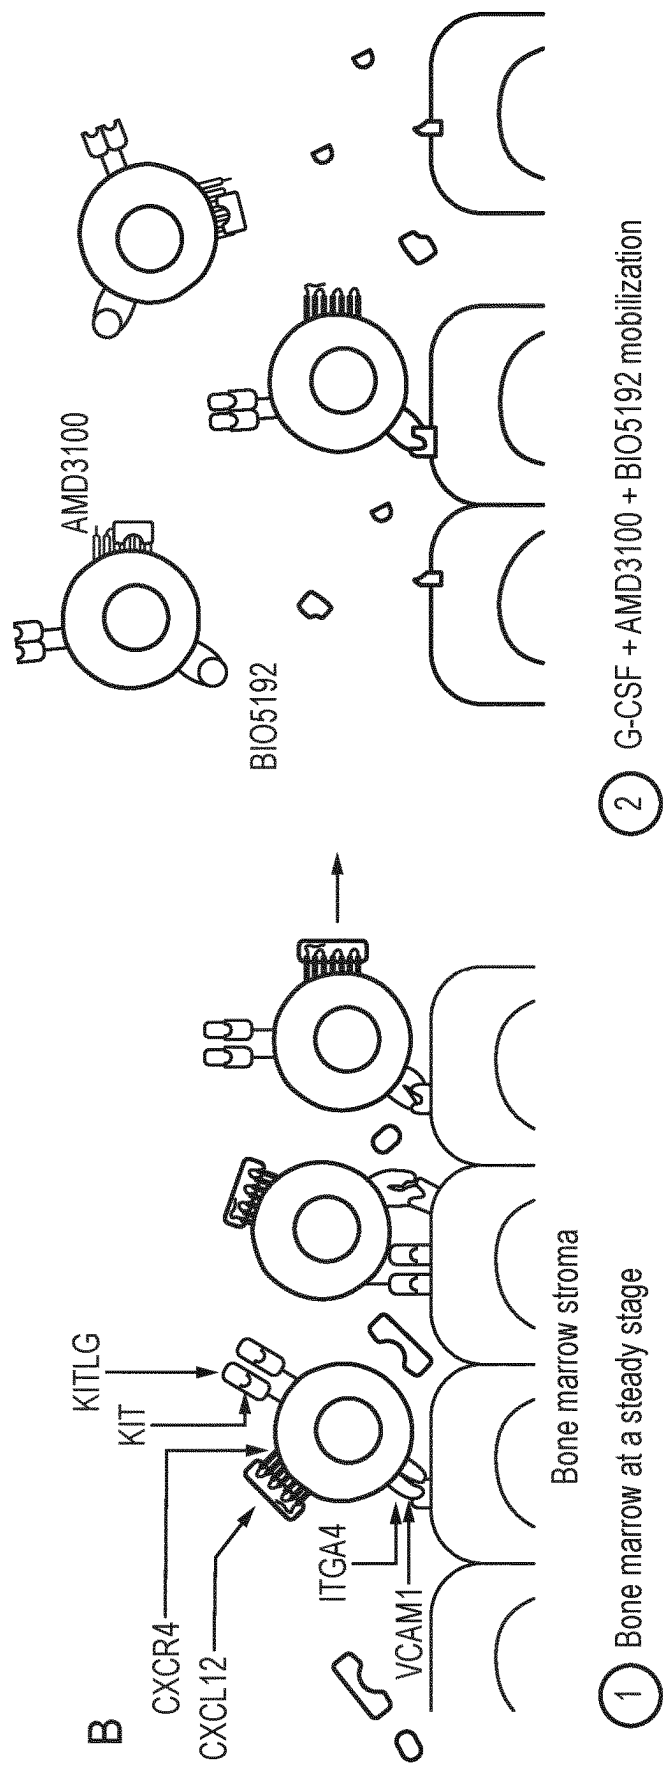


FIG. 6 (continued)


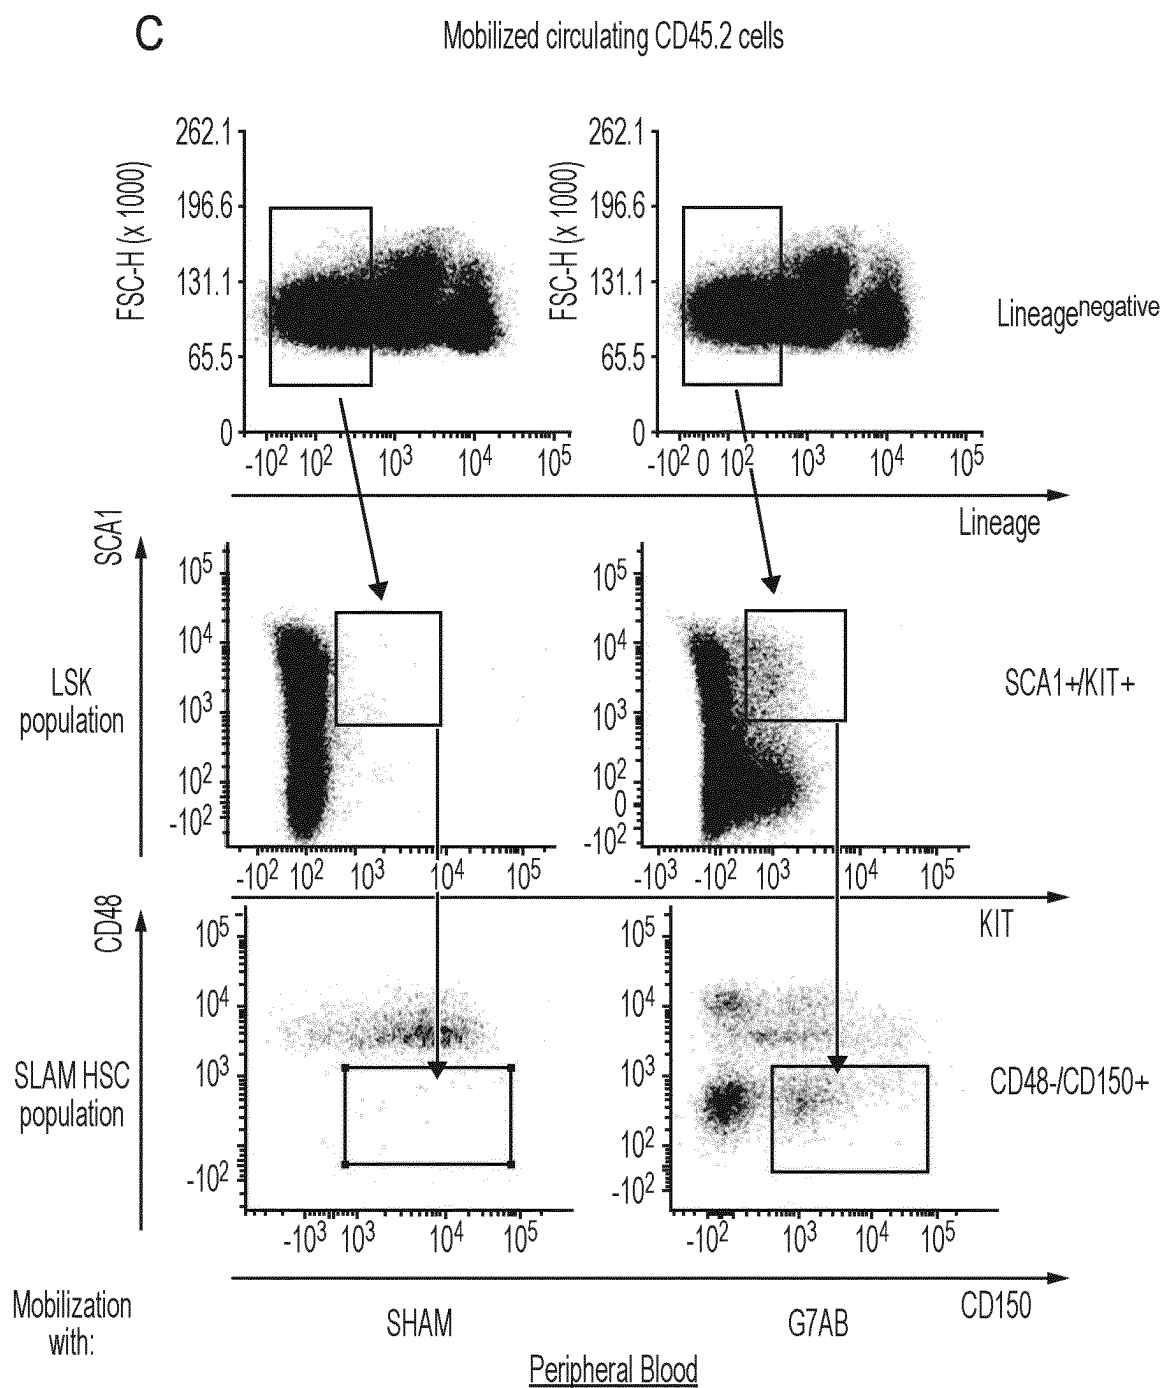


FIG. 6 (continued)


D

Donor CD45.1 cells
Purification of the Lineage^{negative} population

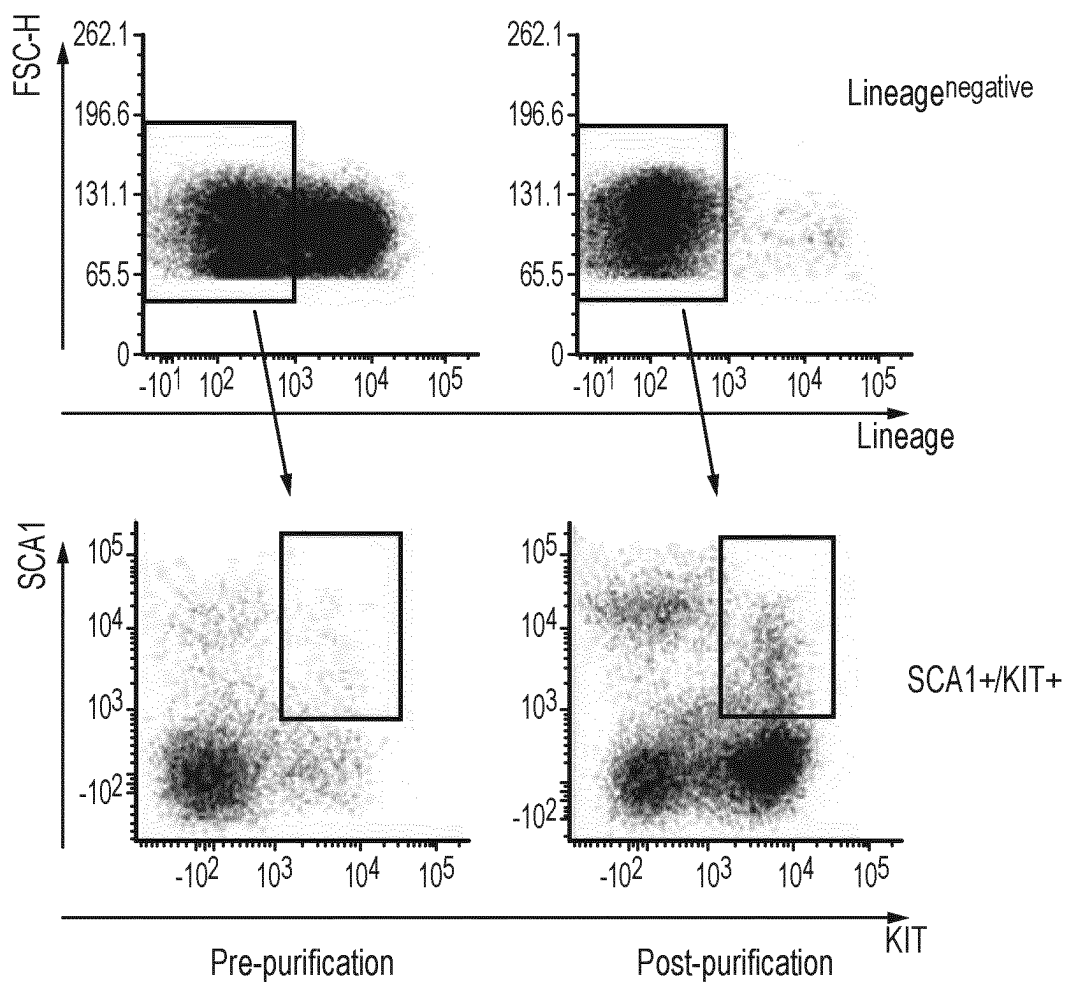

Bone marrow

FIG. 6 (continued)

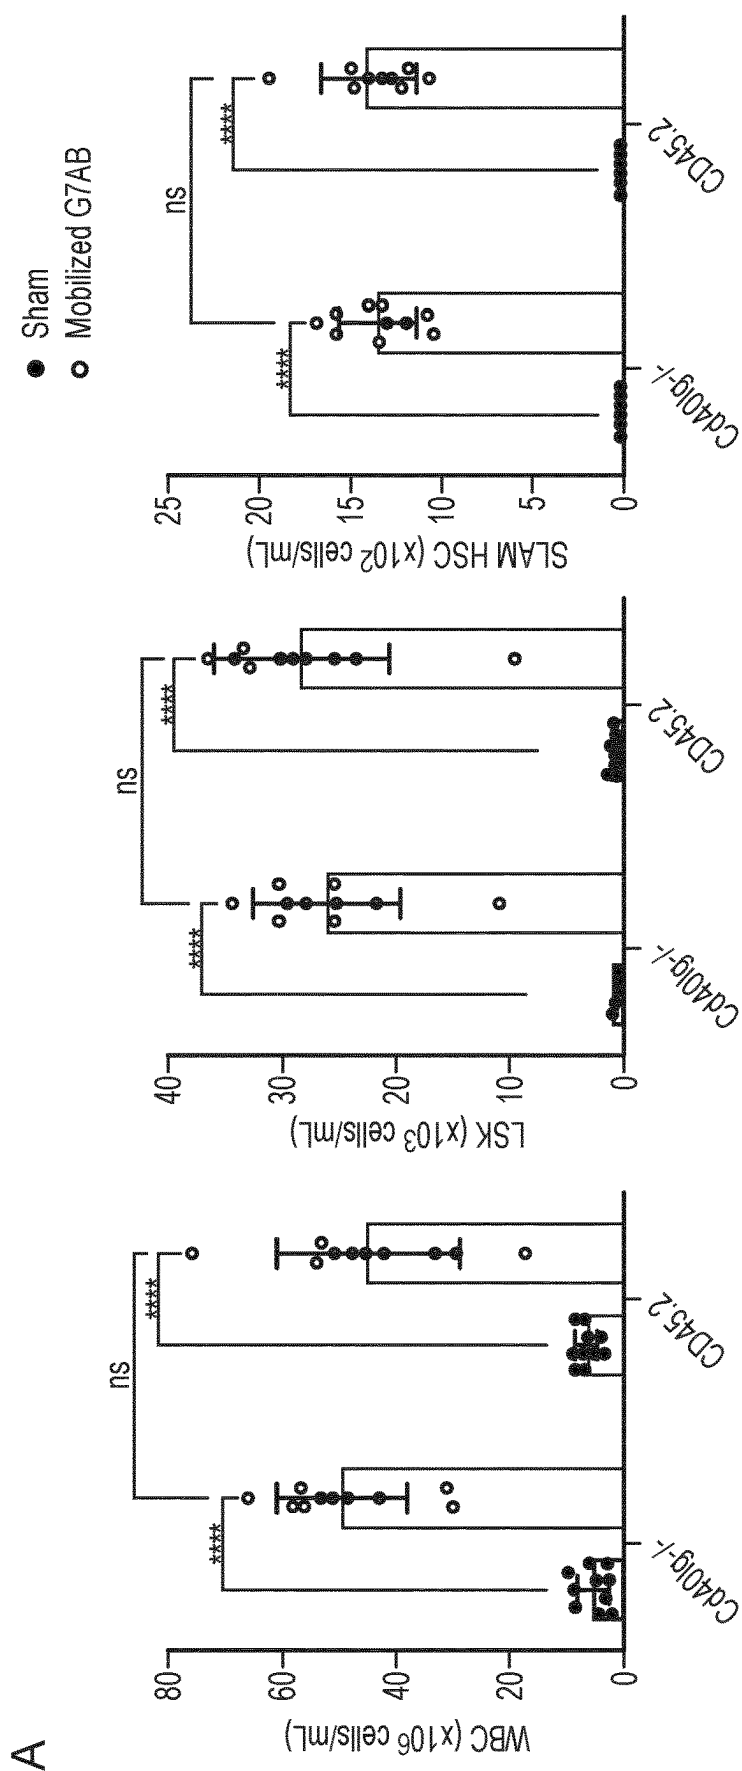7
G.
F.

B

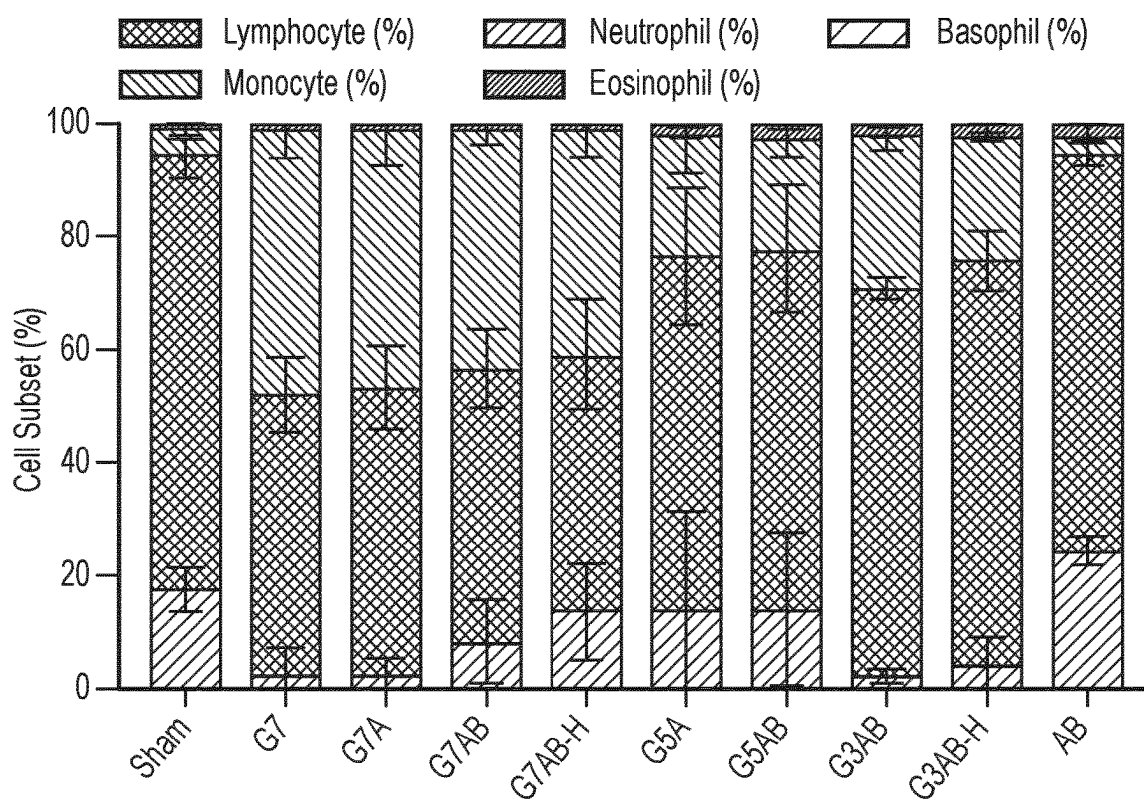


FIG. 7 (continued)

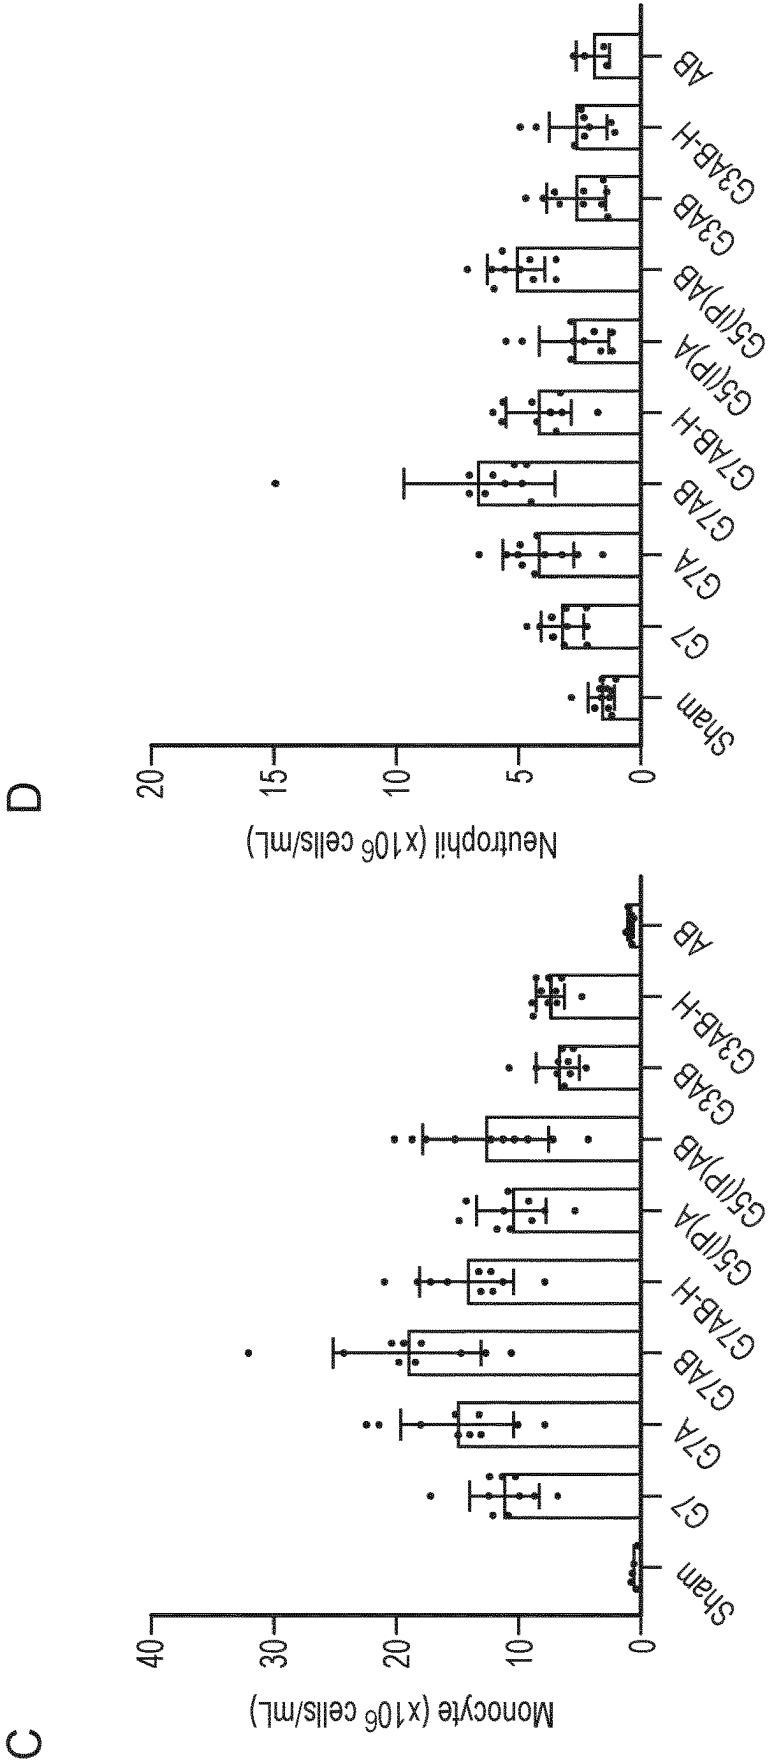


FIG. 7 (continued)

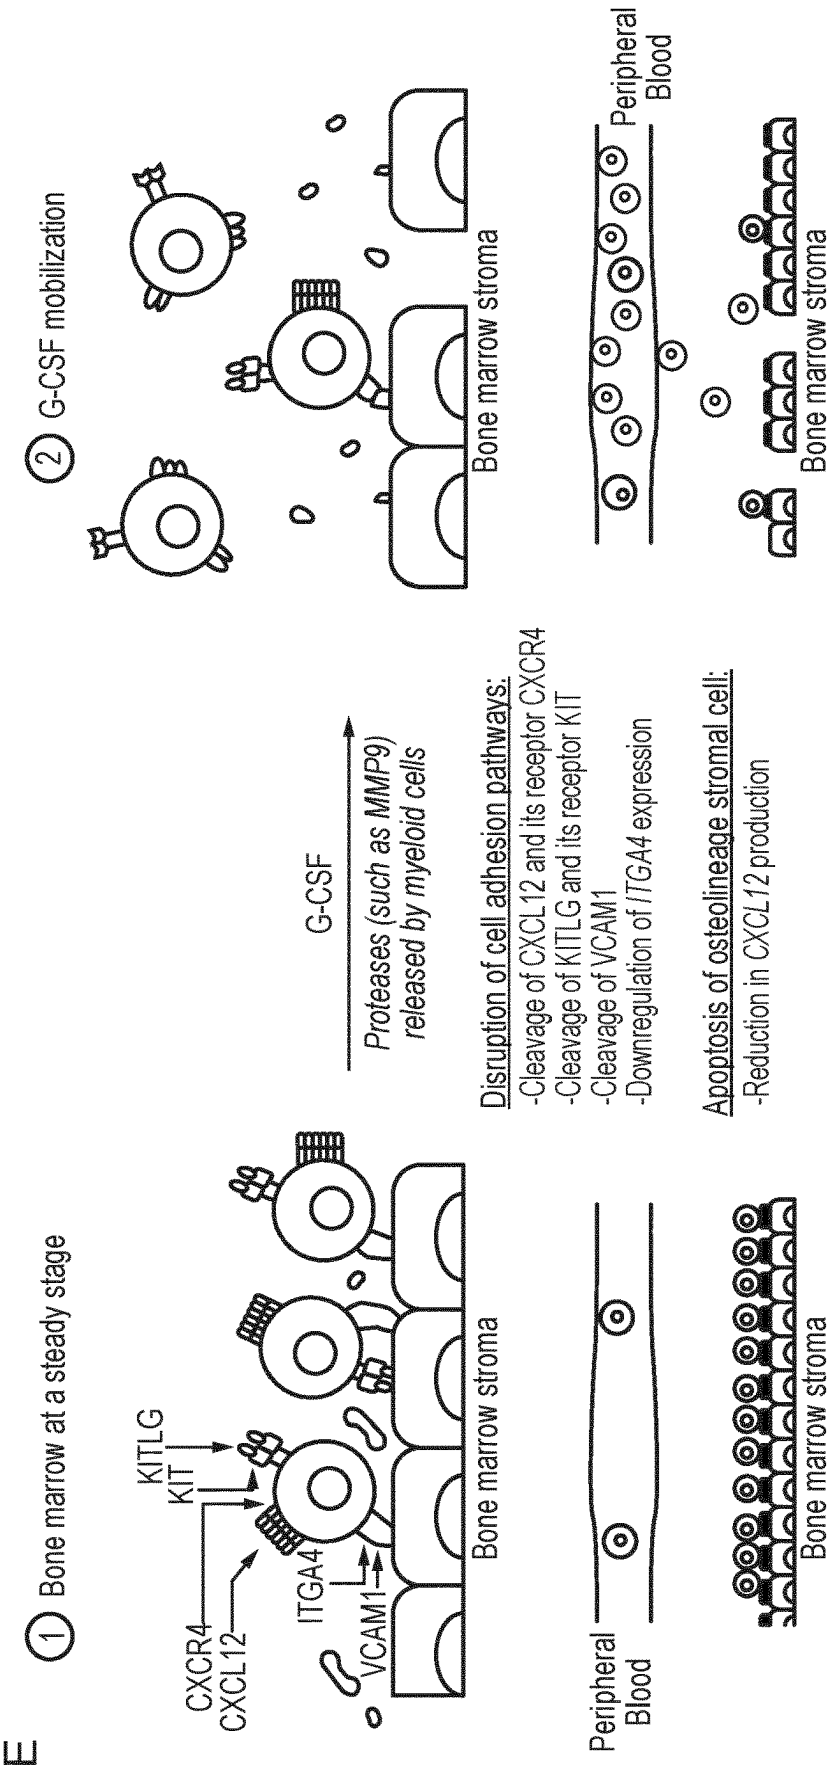


FIG. 7 (continued)

G

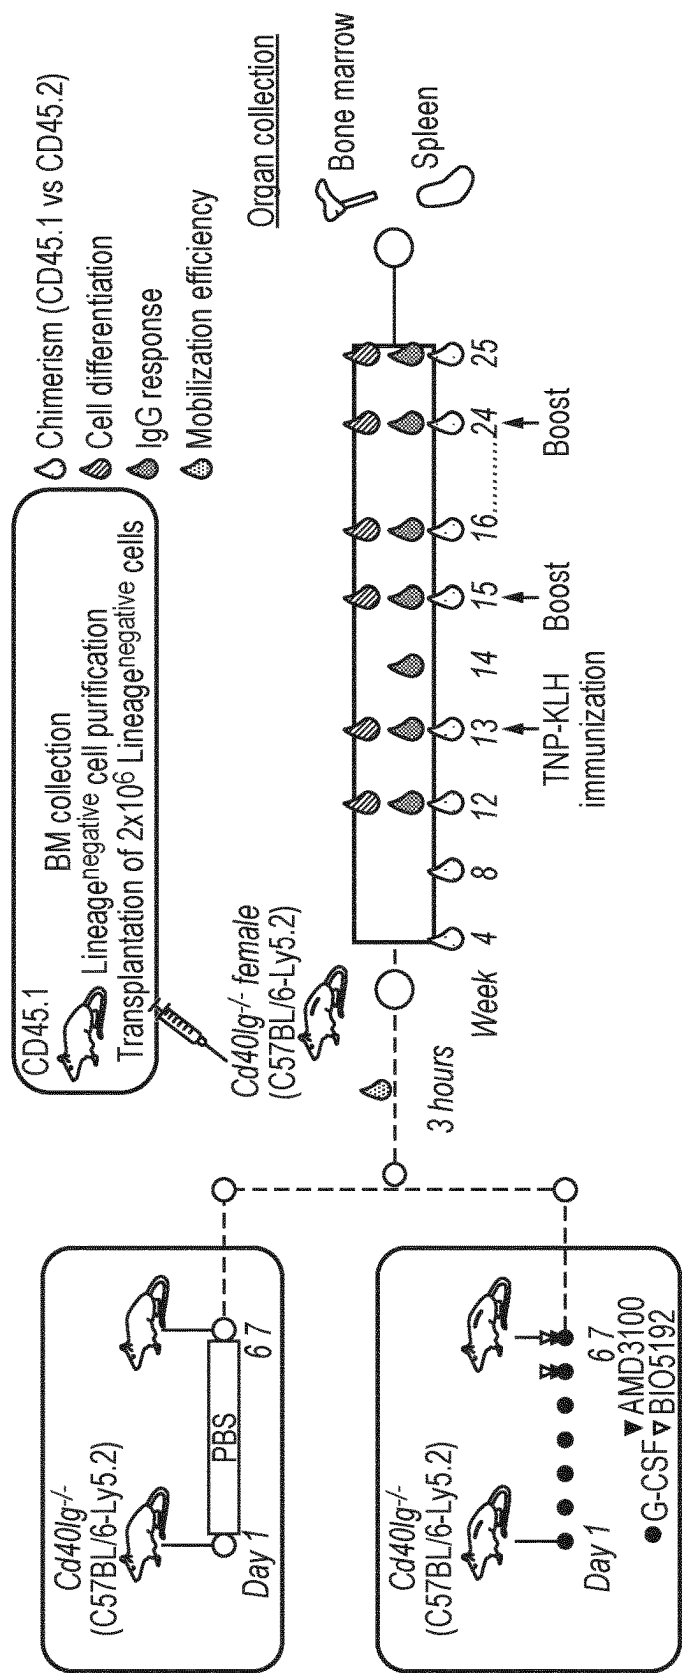


FIG. 7 (continued)

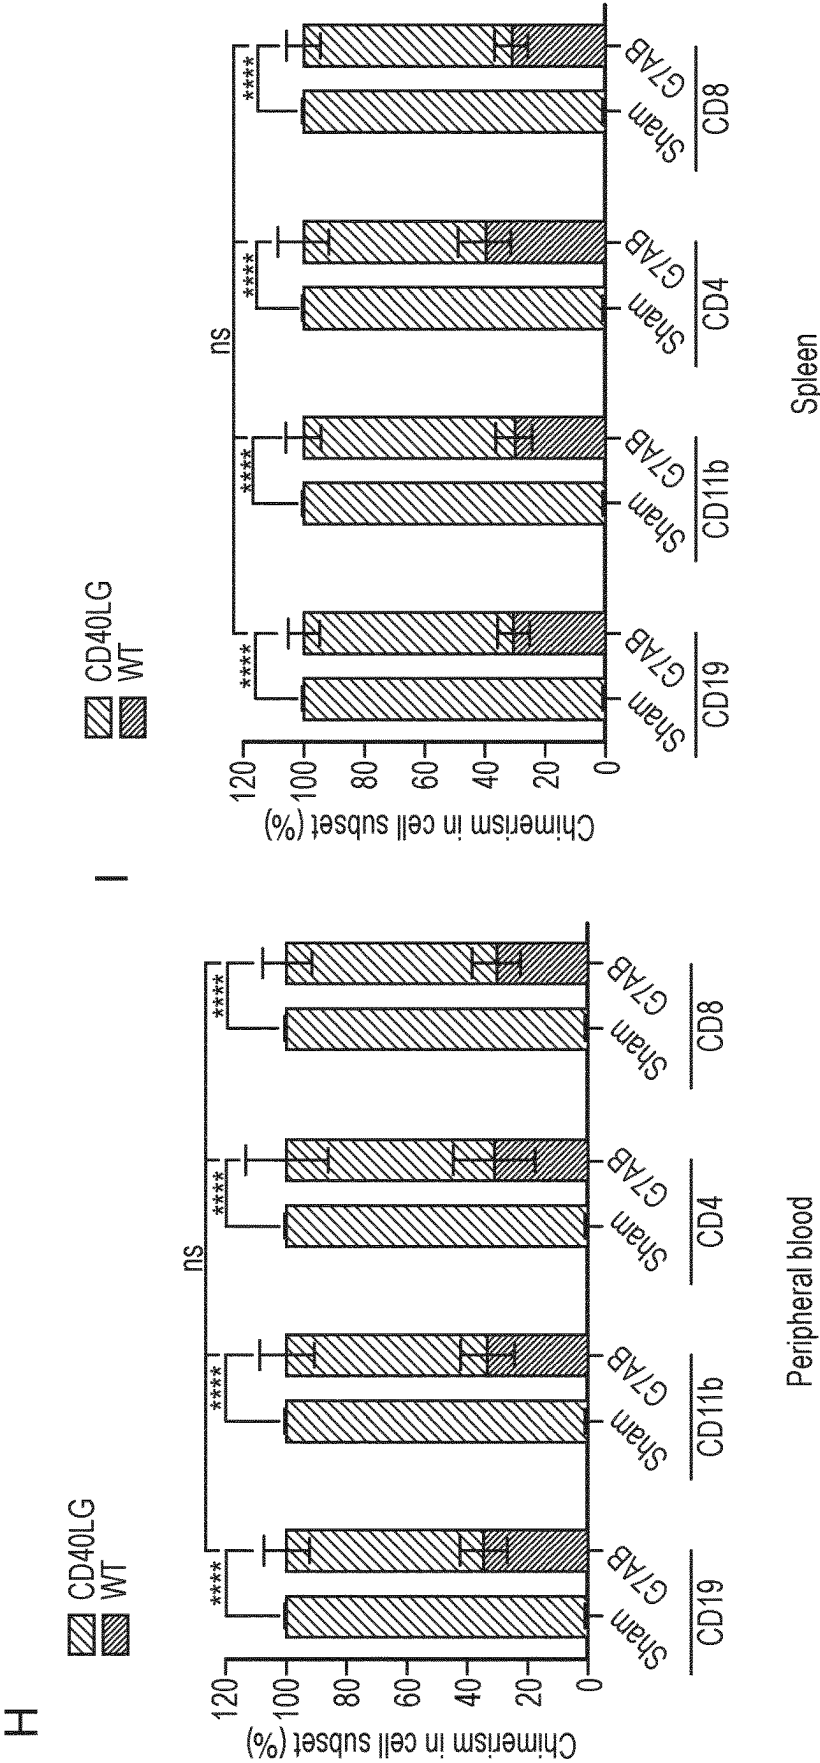


FIG. 7 (continued)


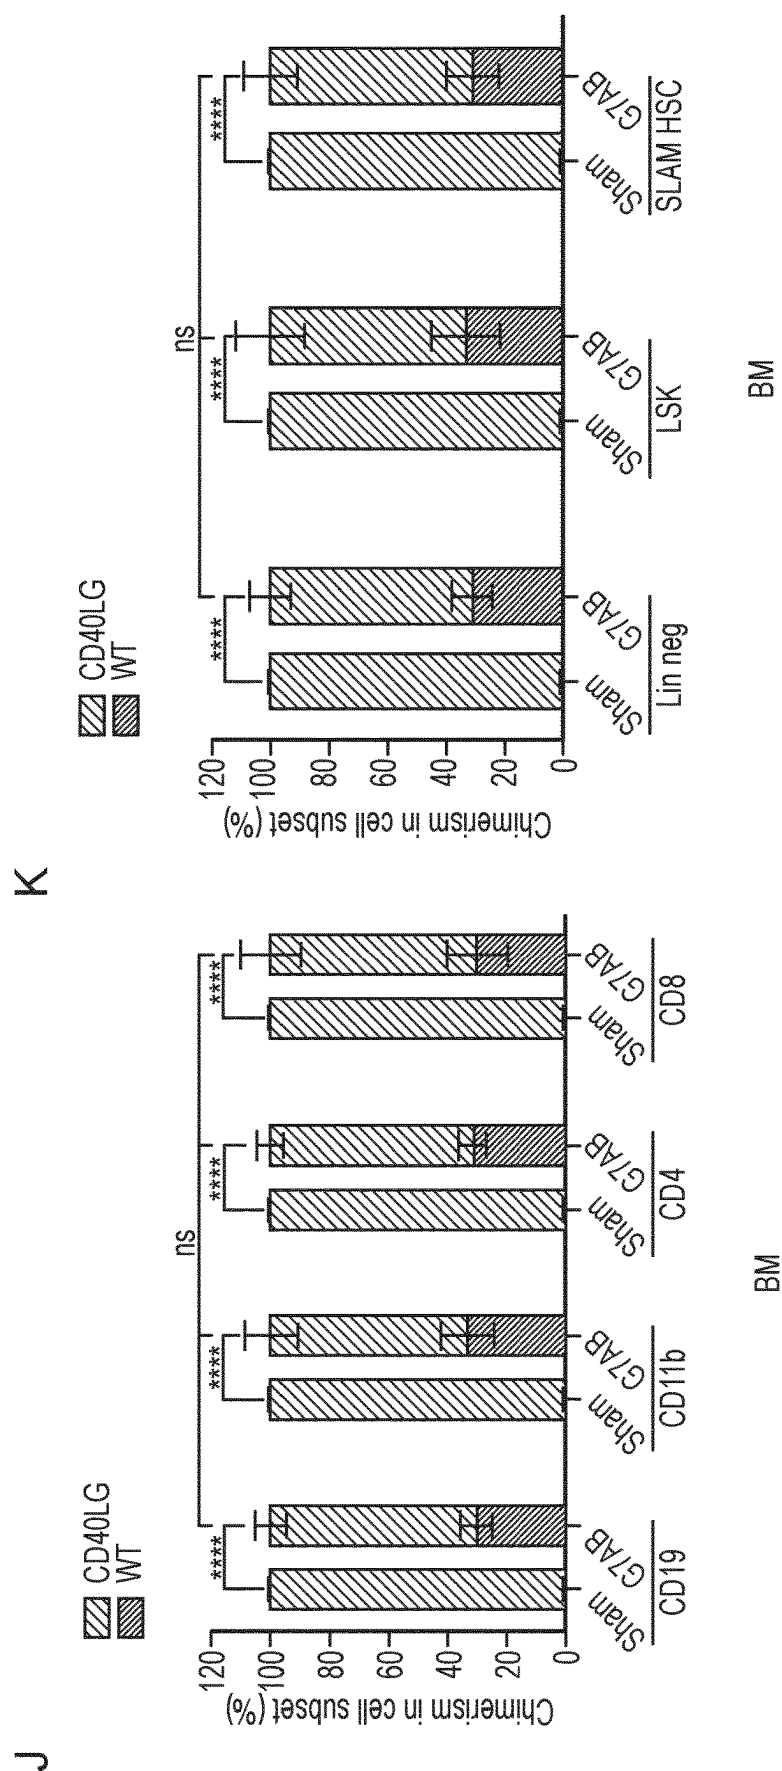


FIG. 7 (continued)

L

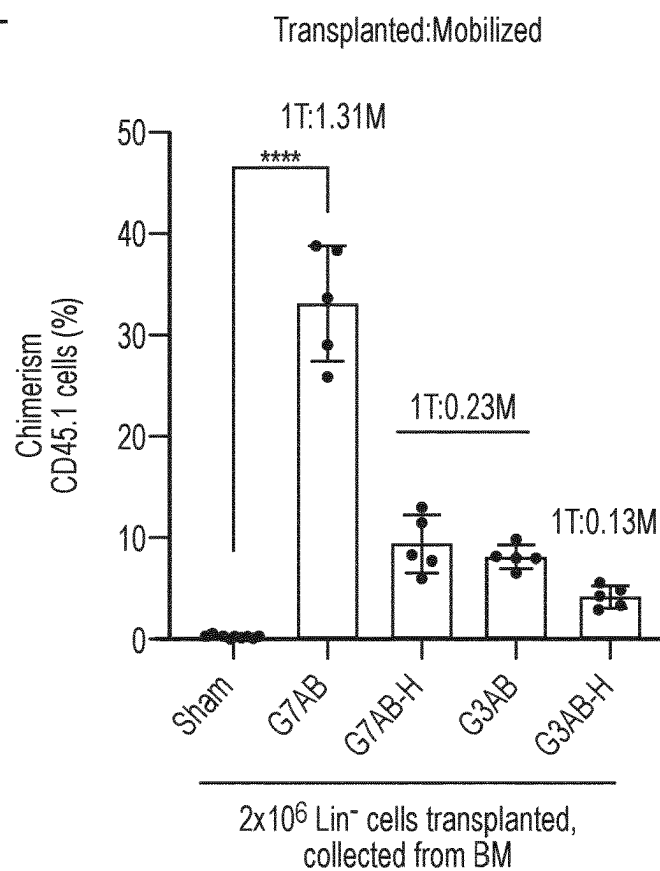

M

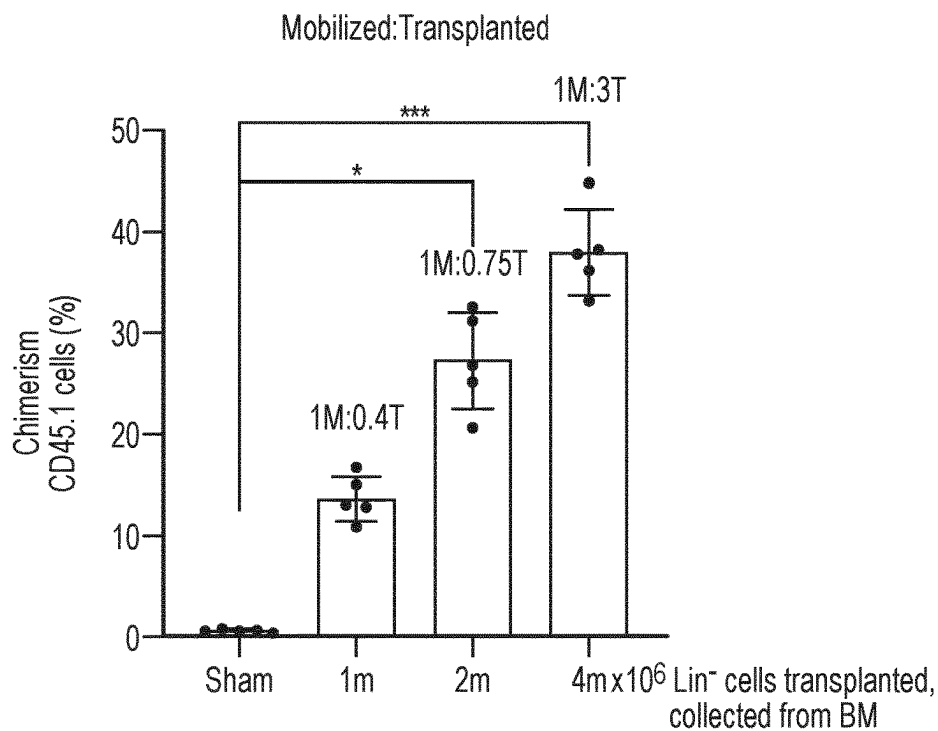


FIG. 7 (continued)

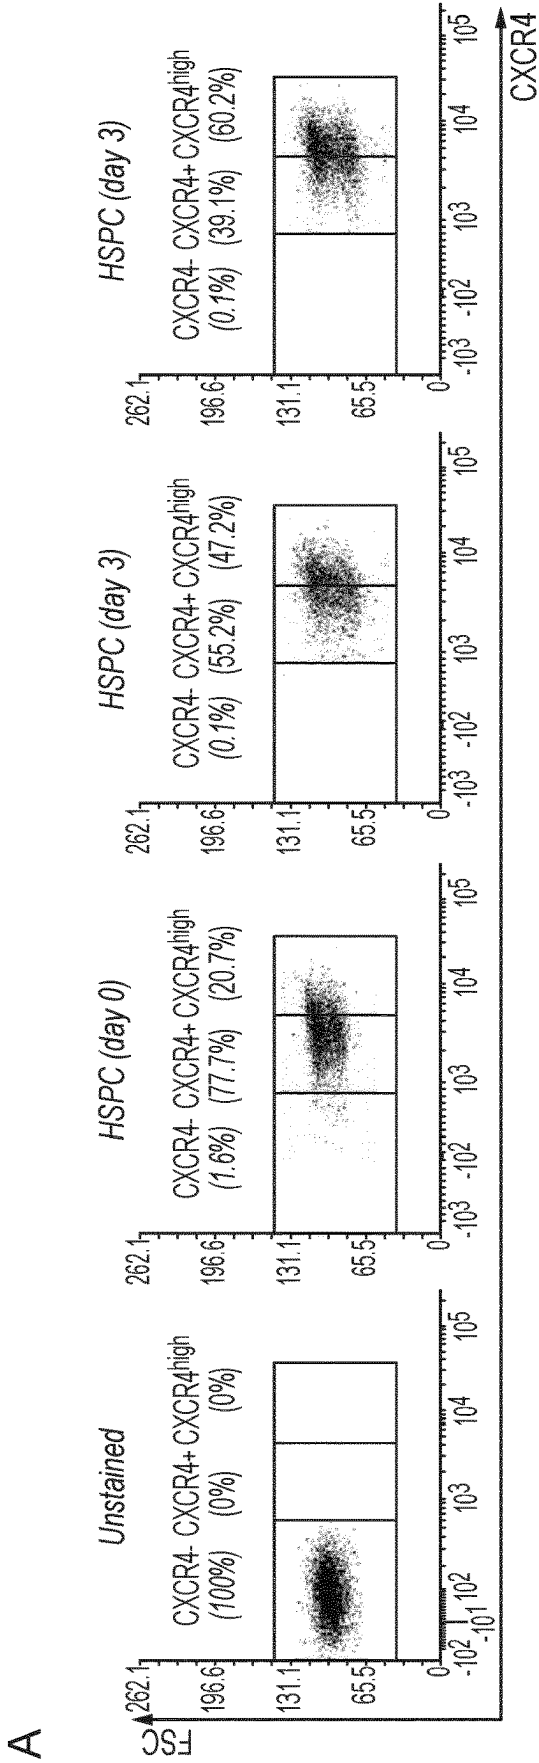


FIG. 8

B

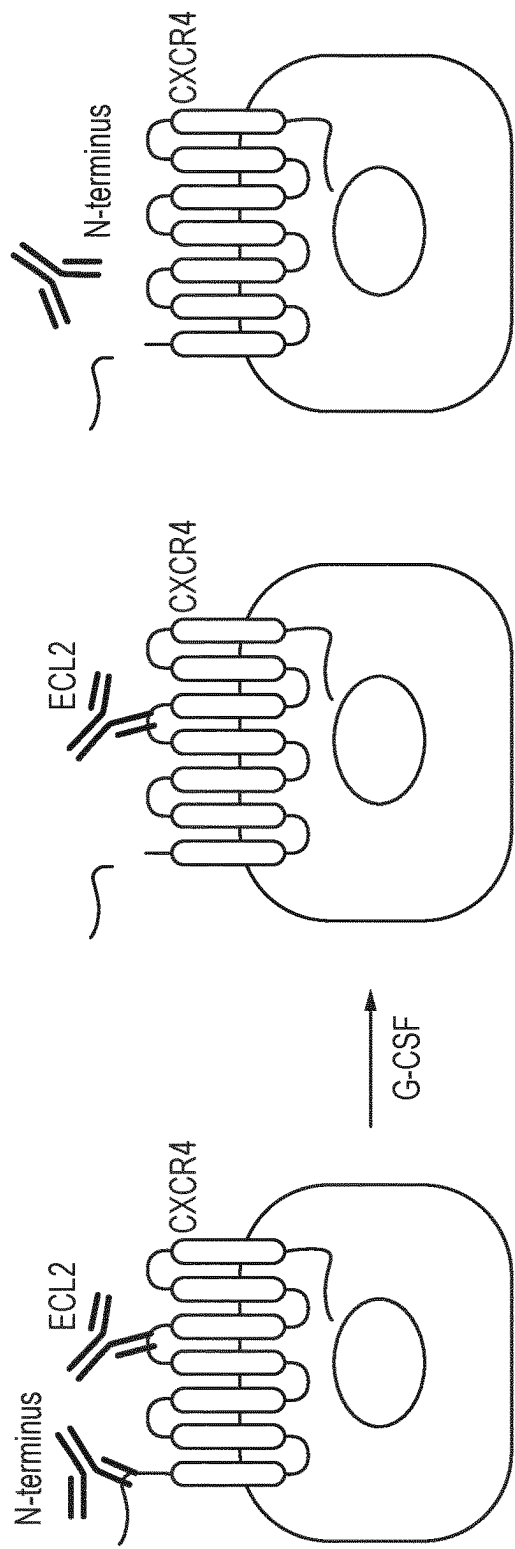


FIG. 8 (continued)

C

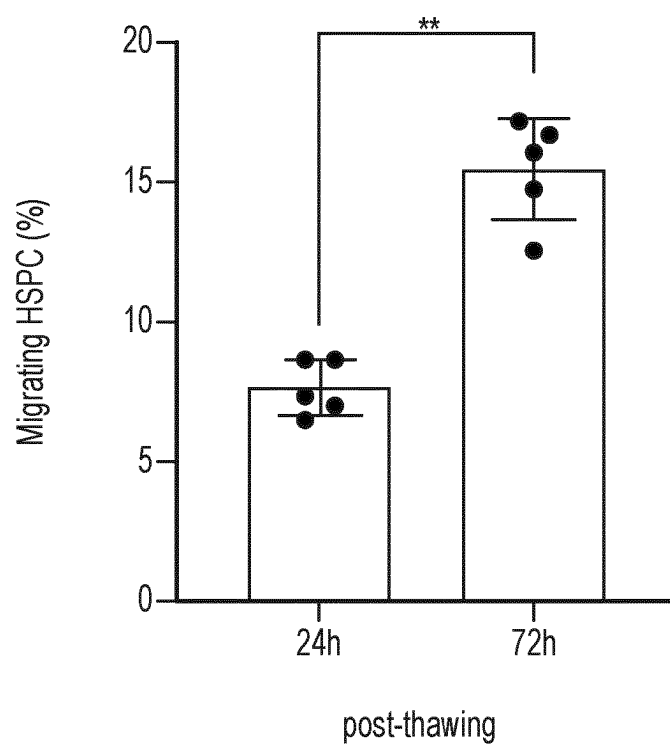


FIG. 8 (continued)

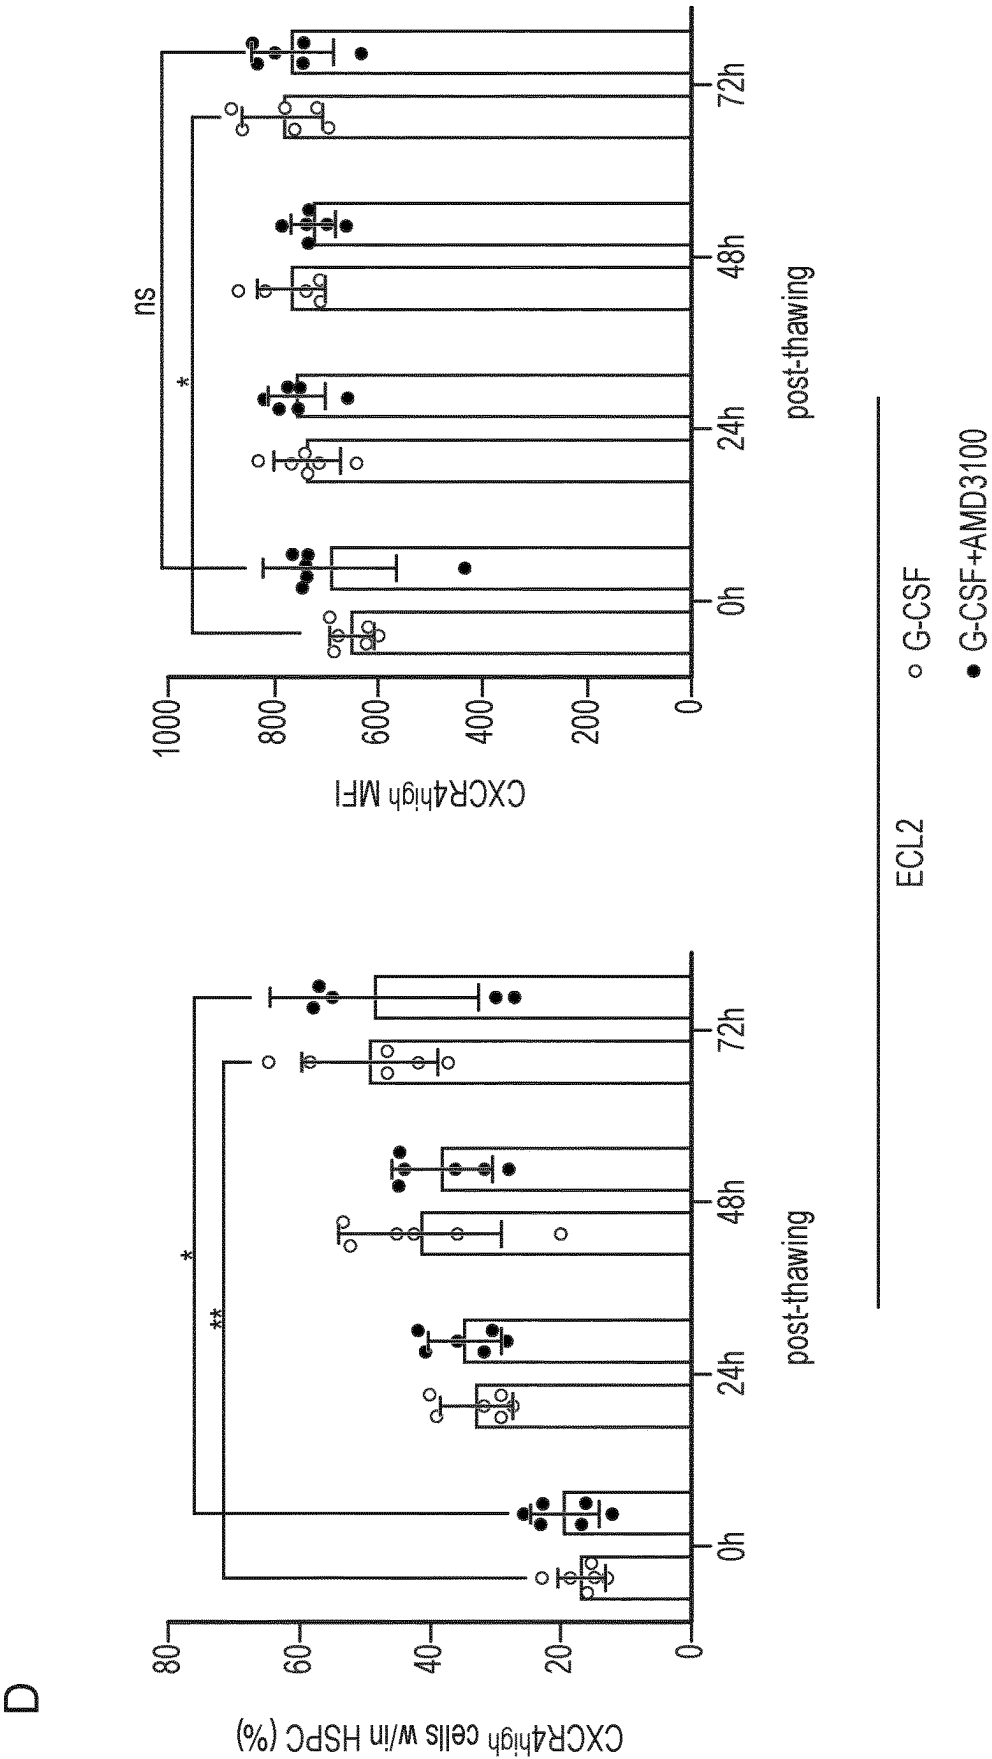


FIG. 8 (continued)

E

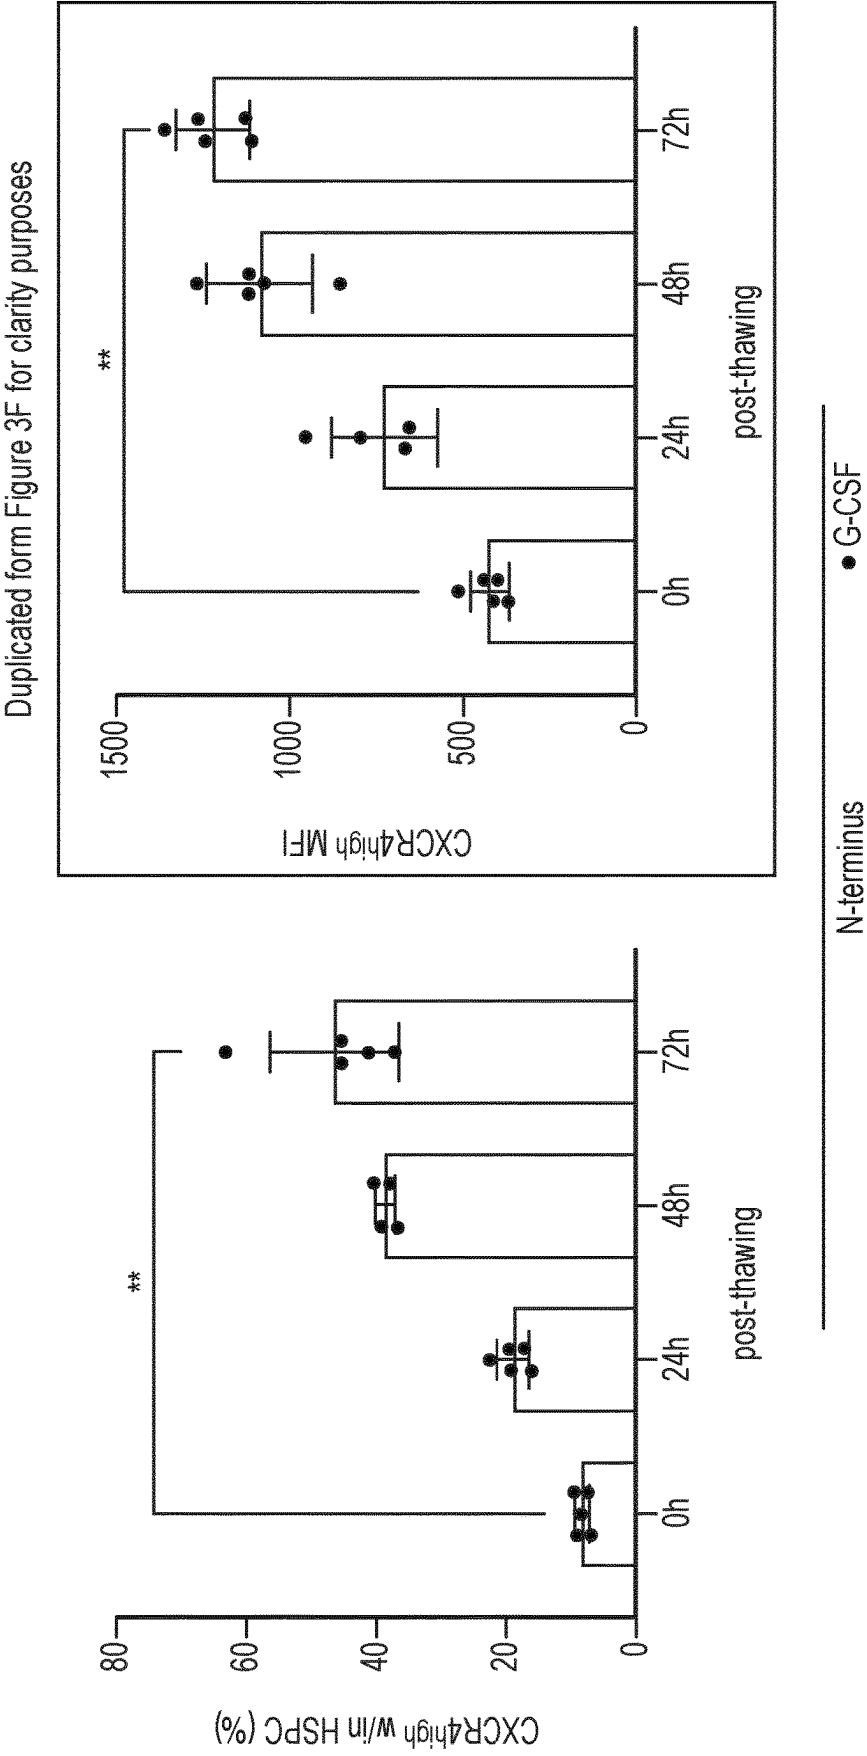


FIG. 8 (continued)

F

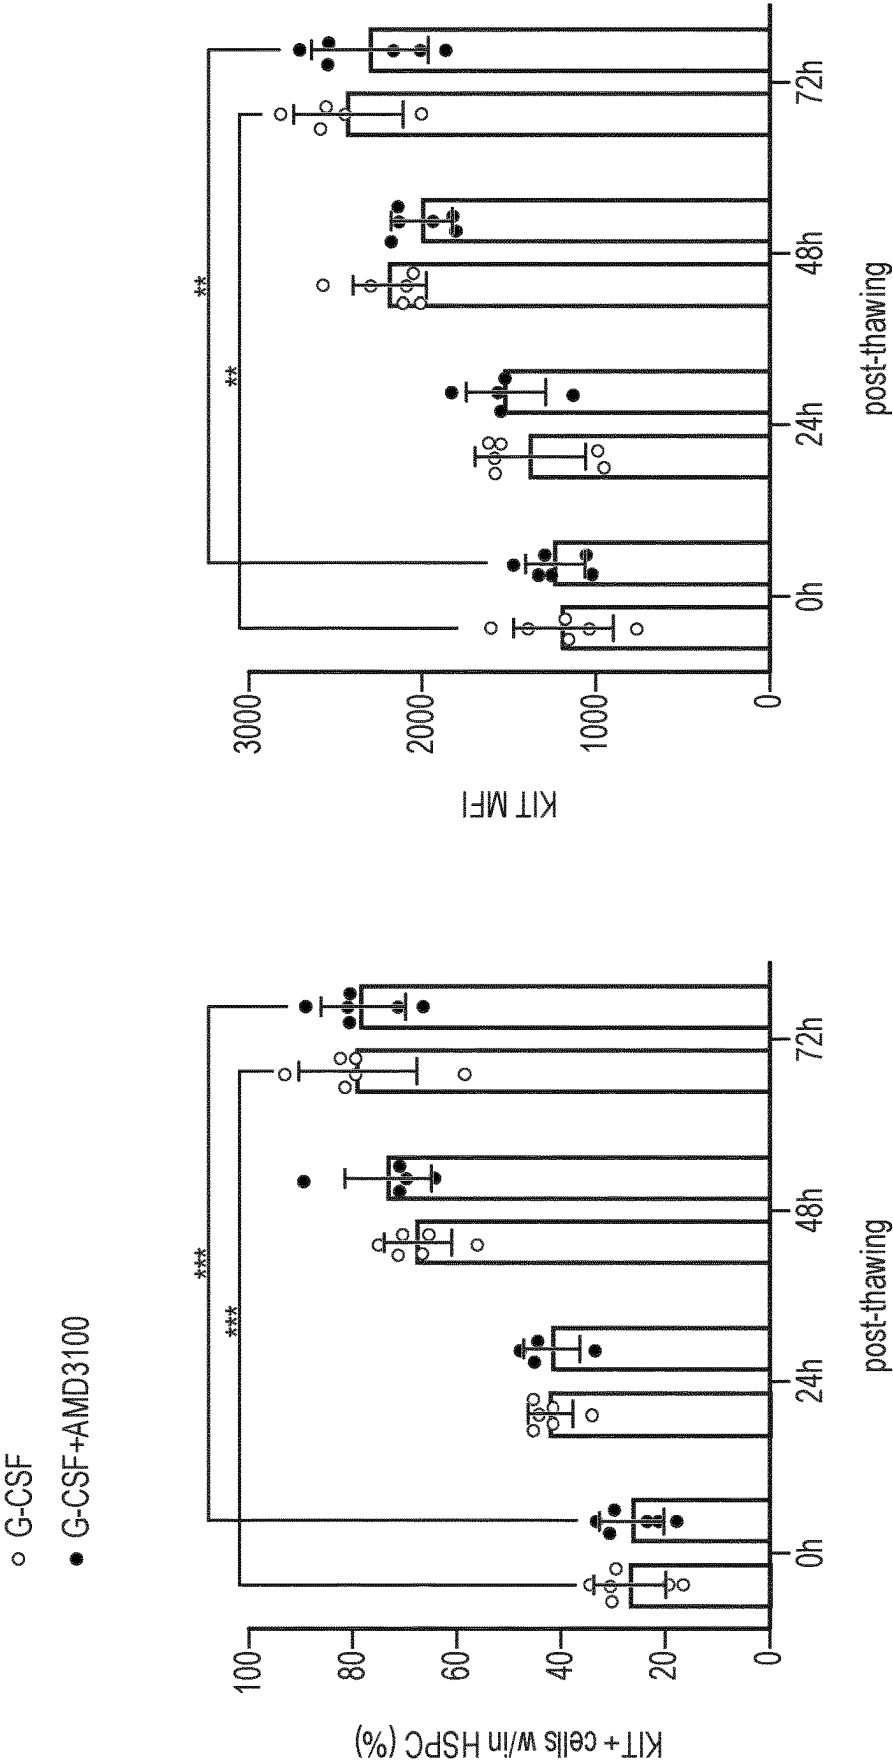


FIG. 8 (continued)

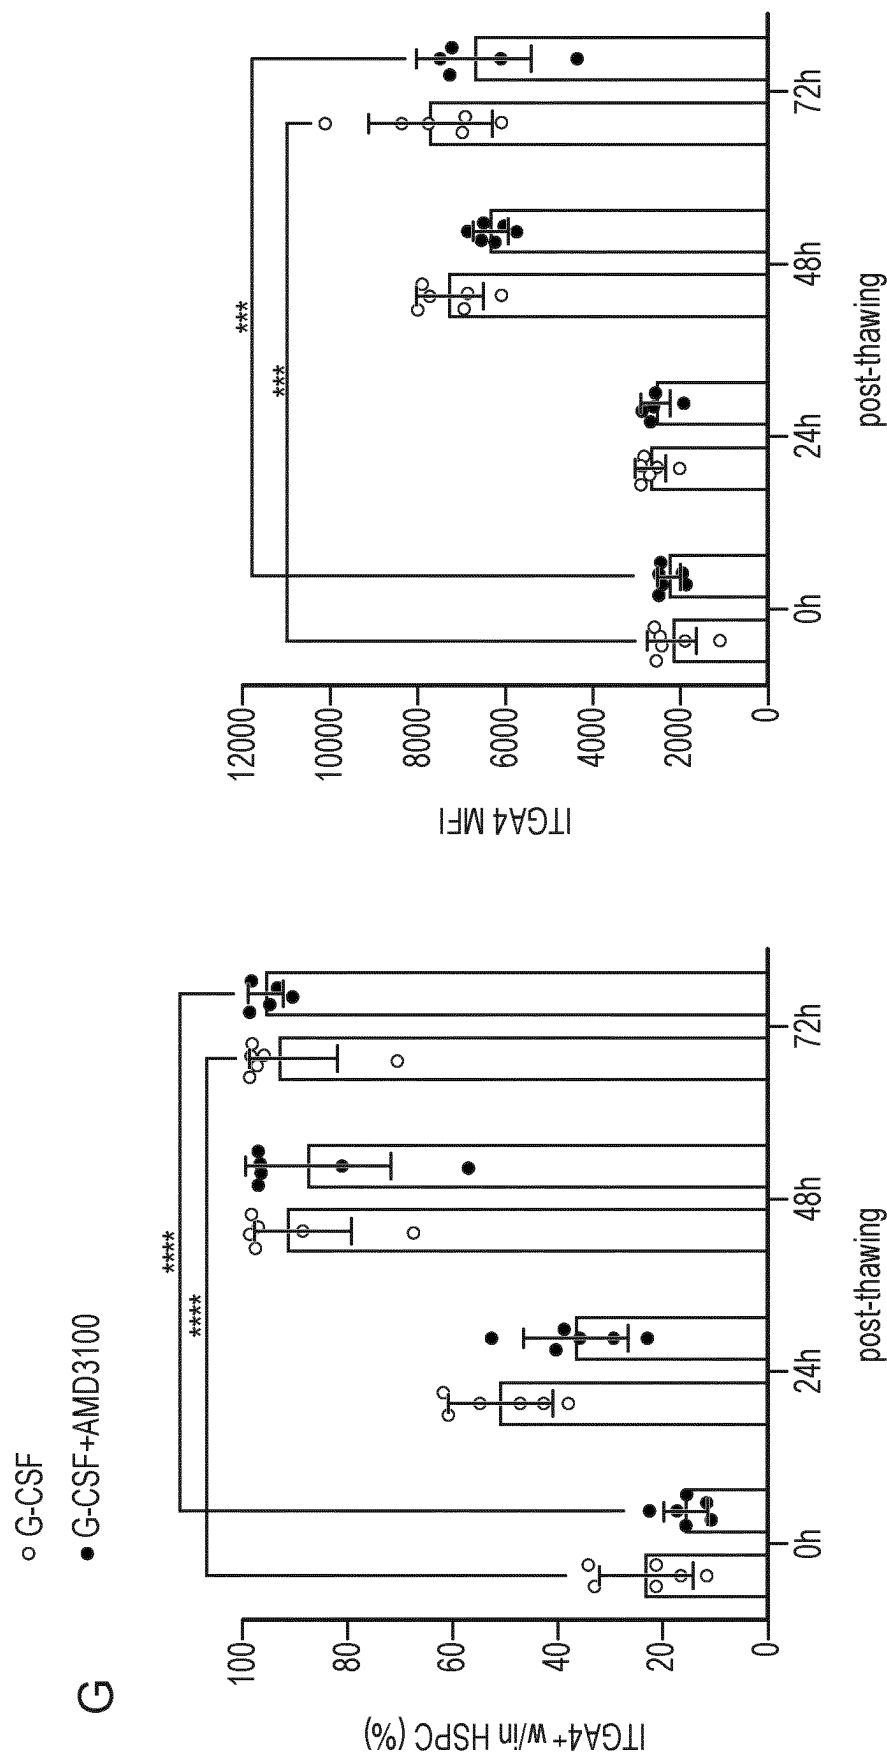


FIG. 8 (continued)

A

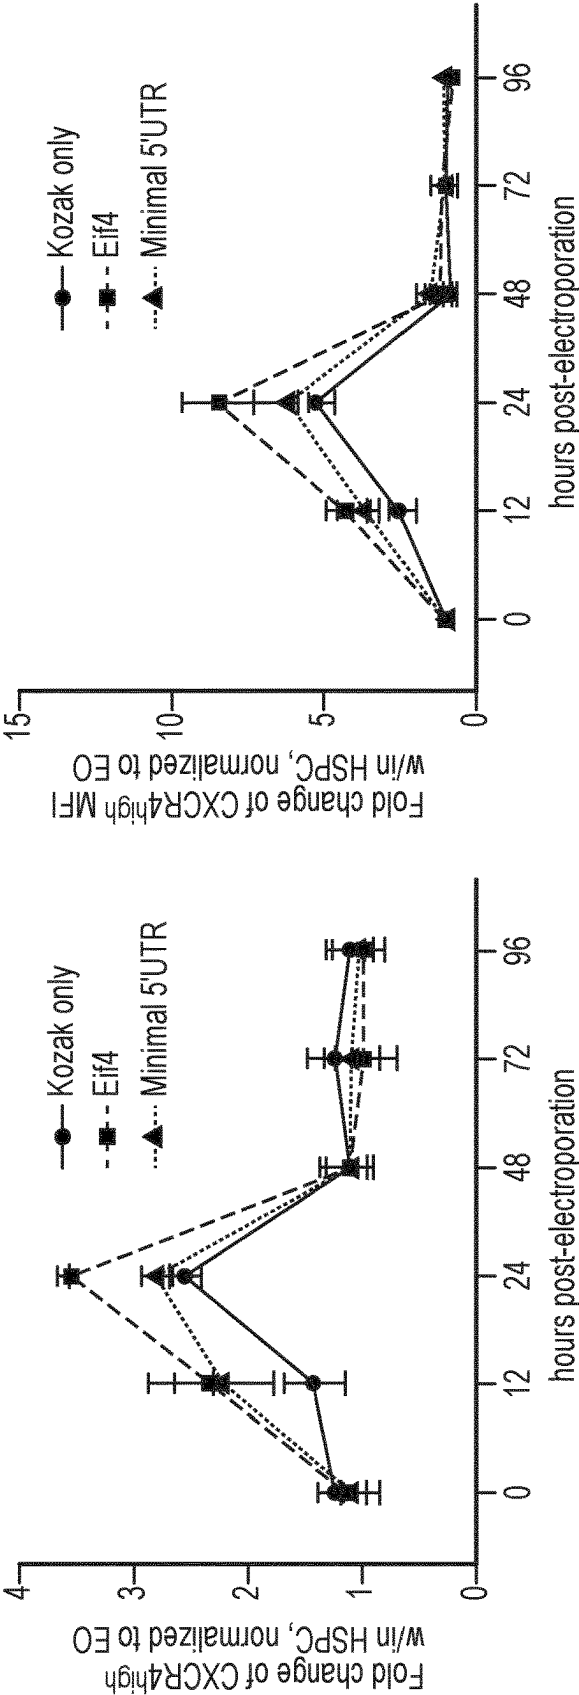


FIG. 9

B

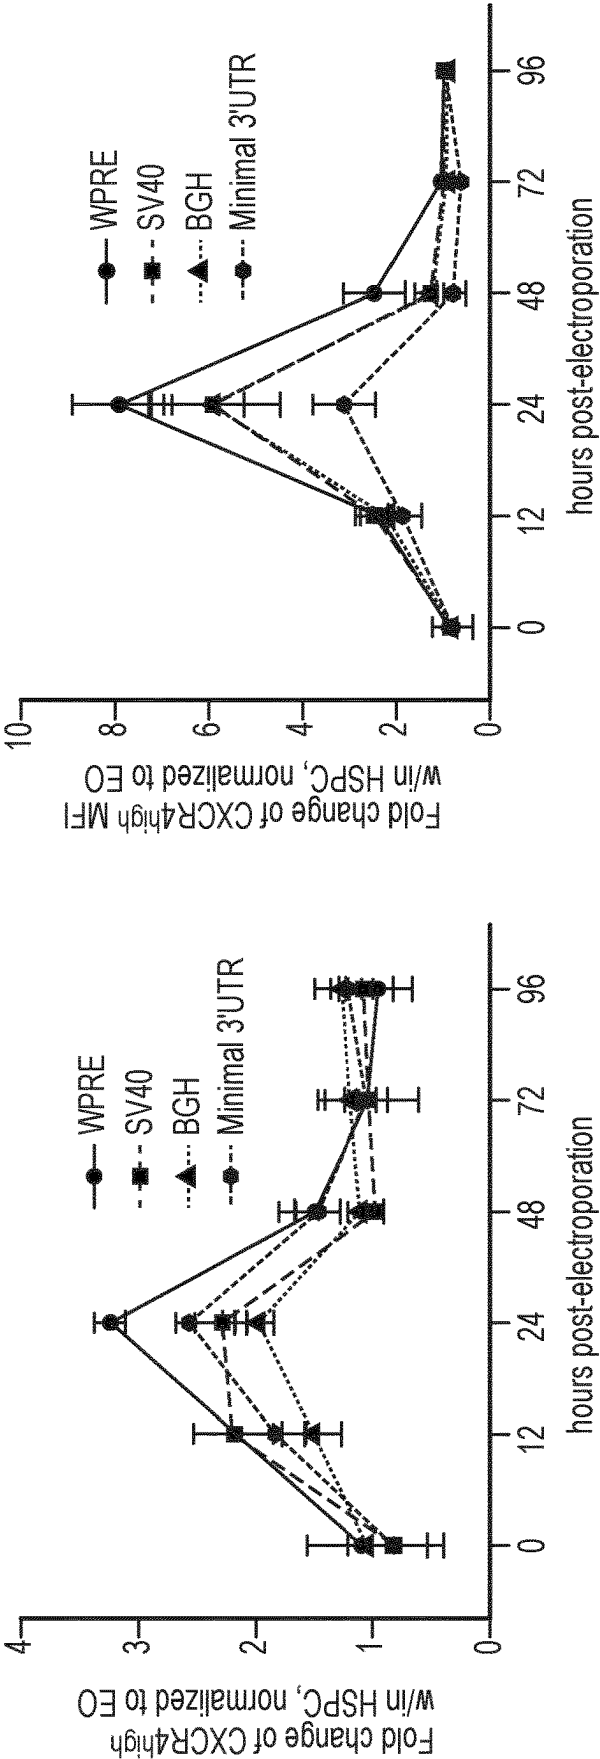


FIG. 9 (continued)

C

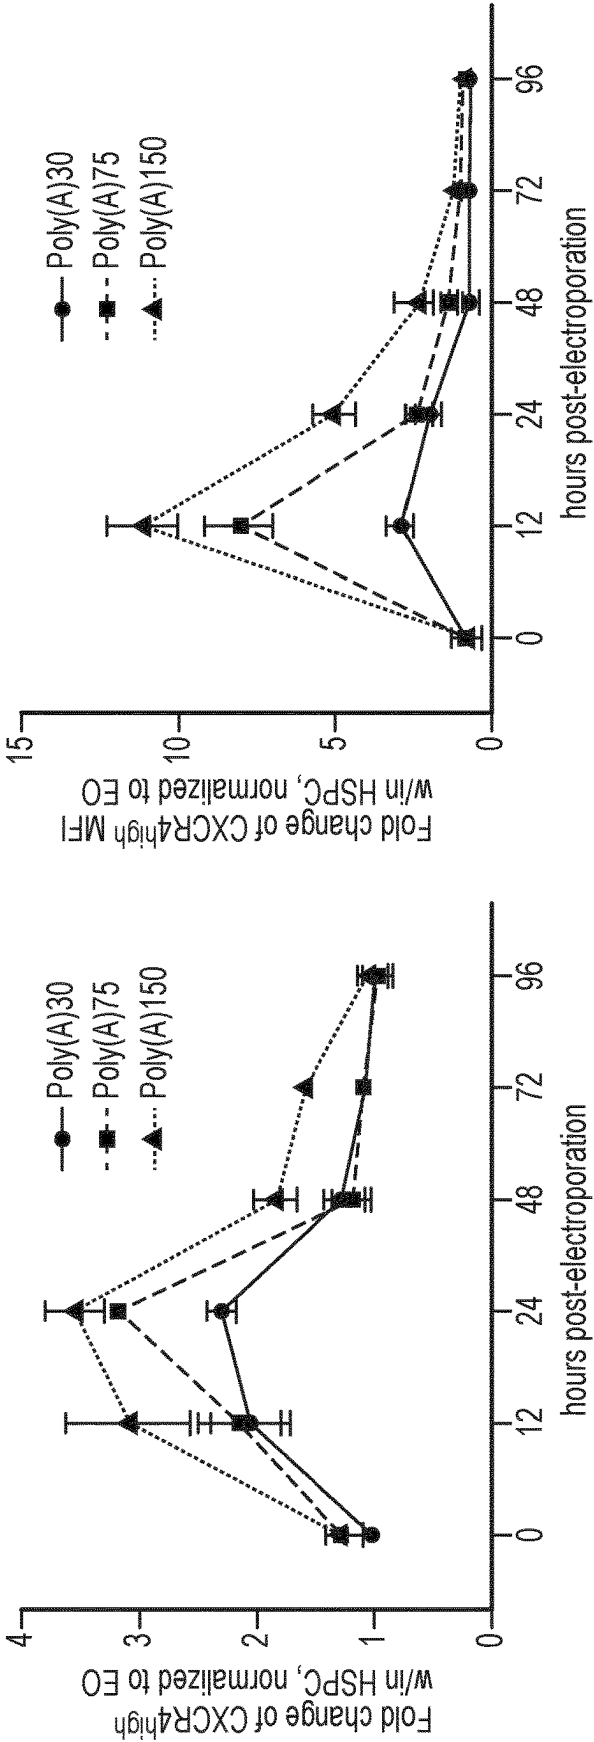


FIG. 9 (continued)

D

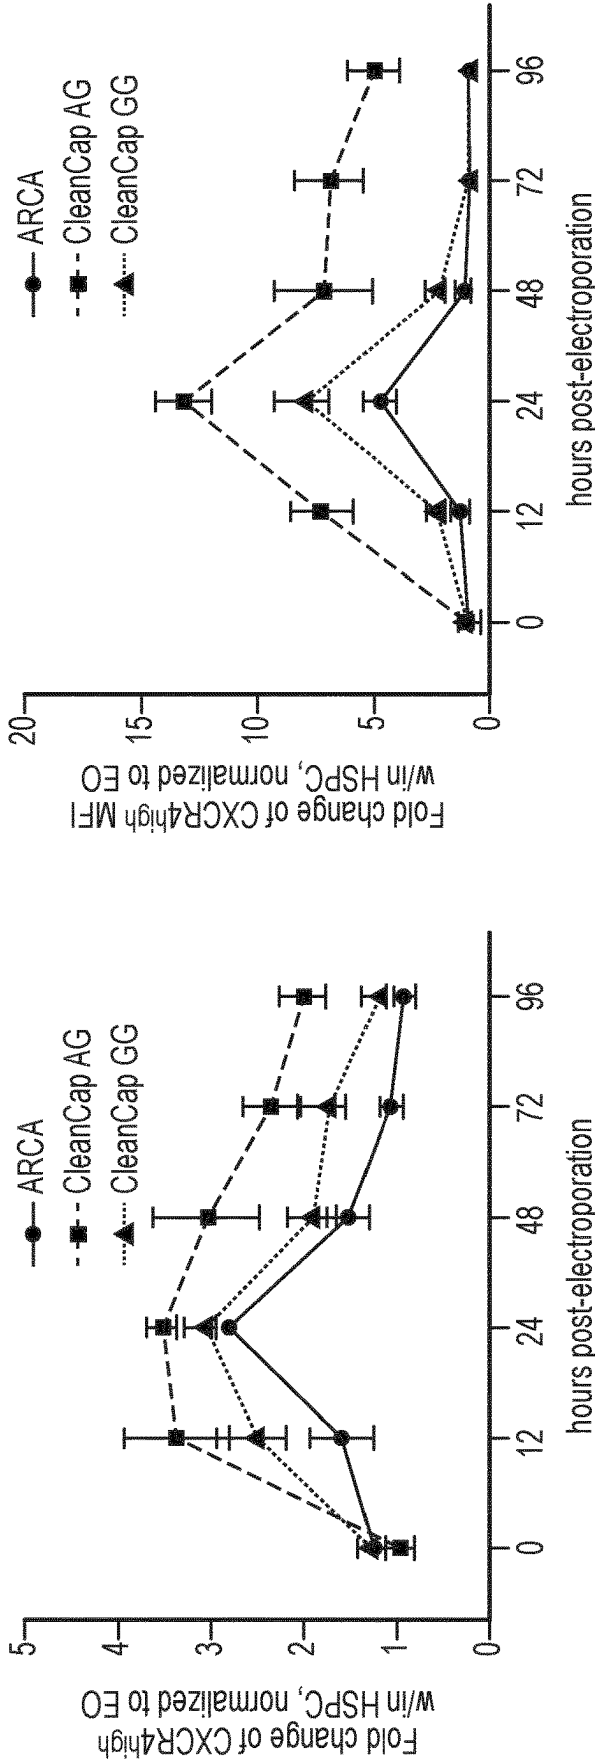


FIG. 9 (continued)

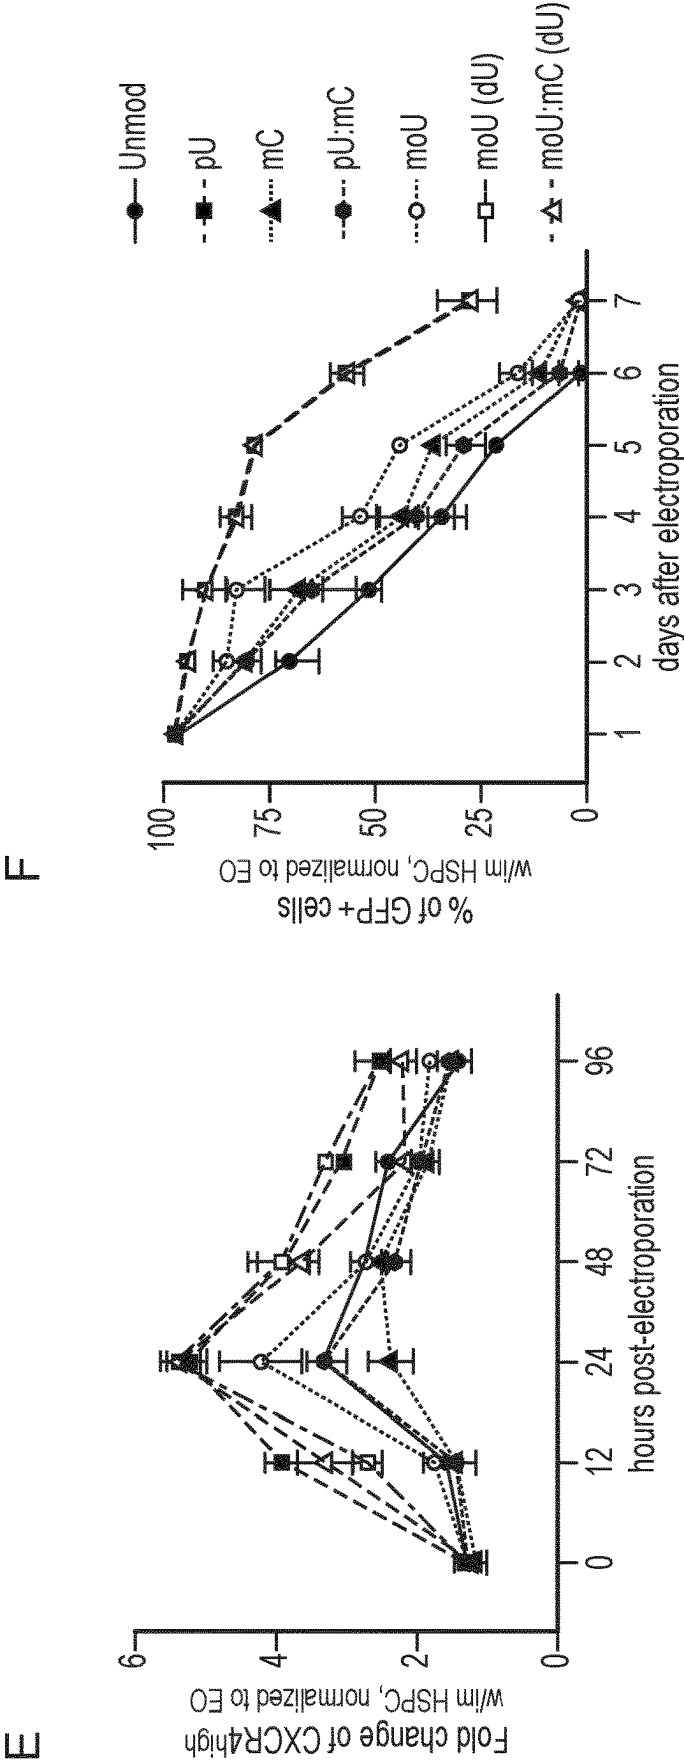


FIG. 9 (continued)

G

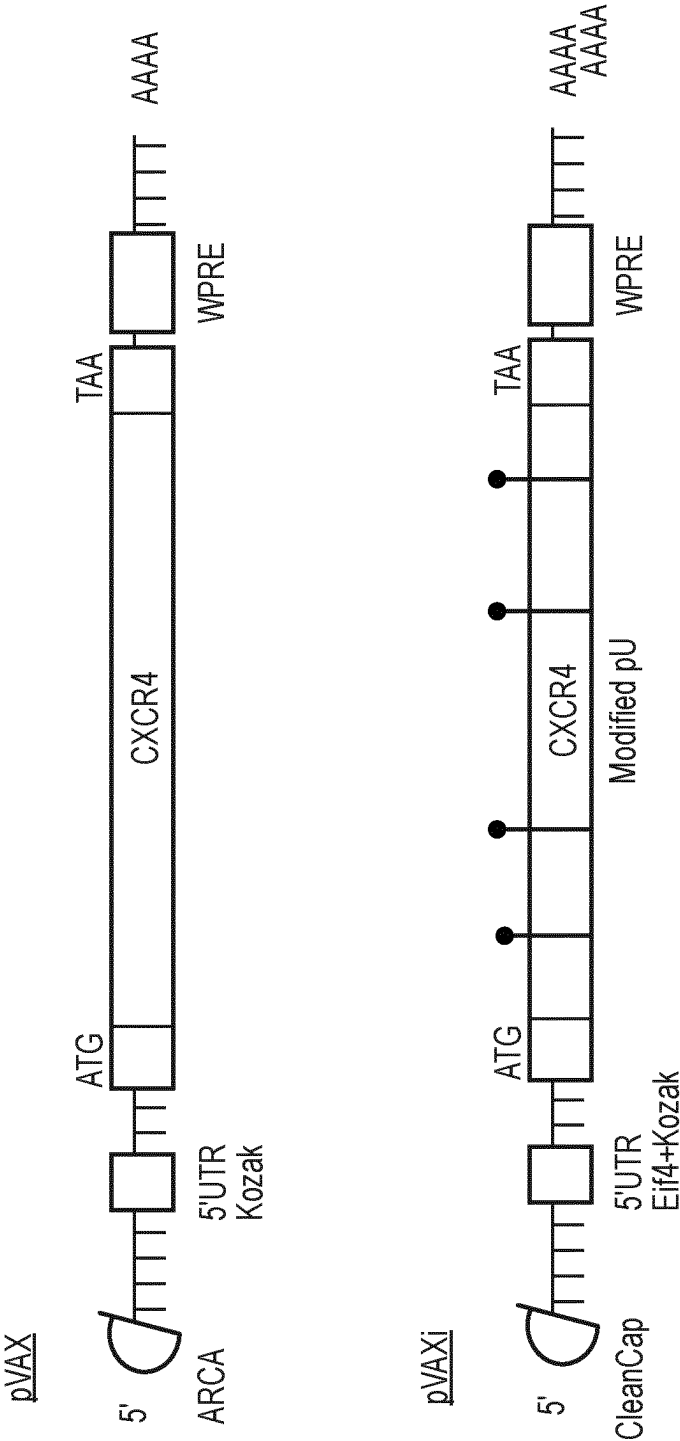


FIG. 9 (continued)

H

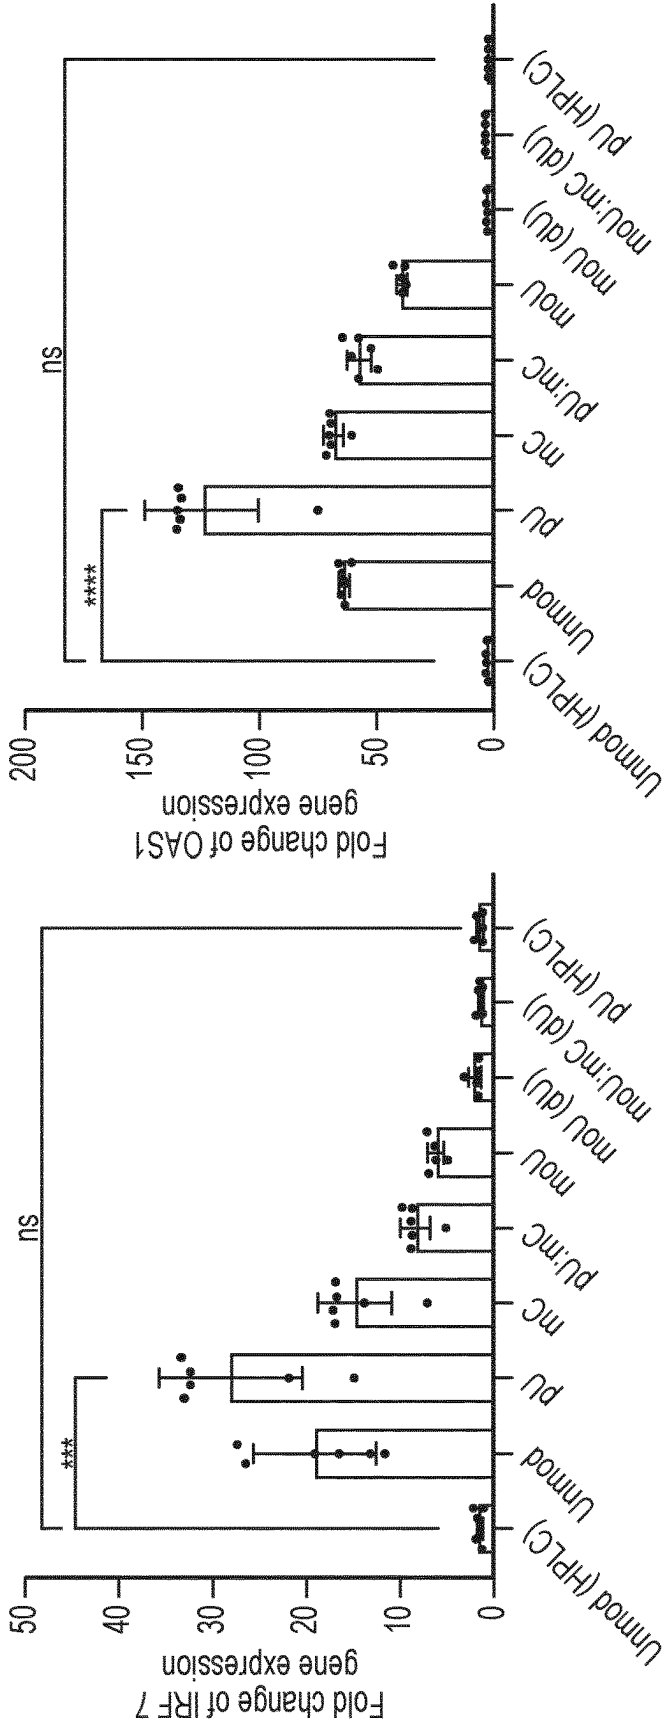


FIG. 9 (continued)

H

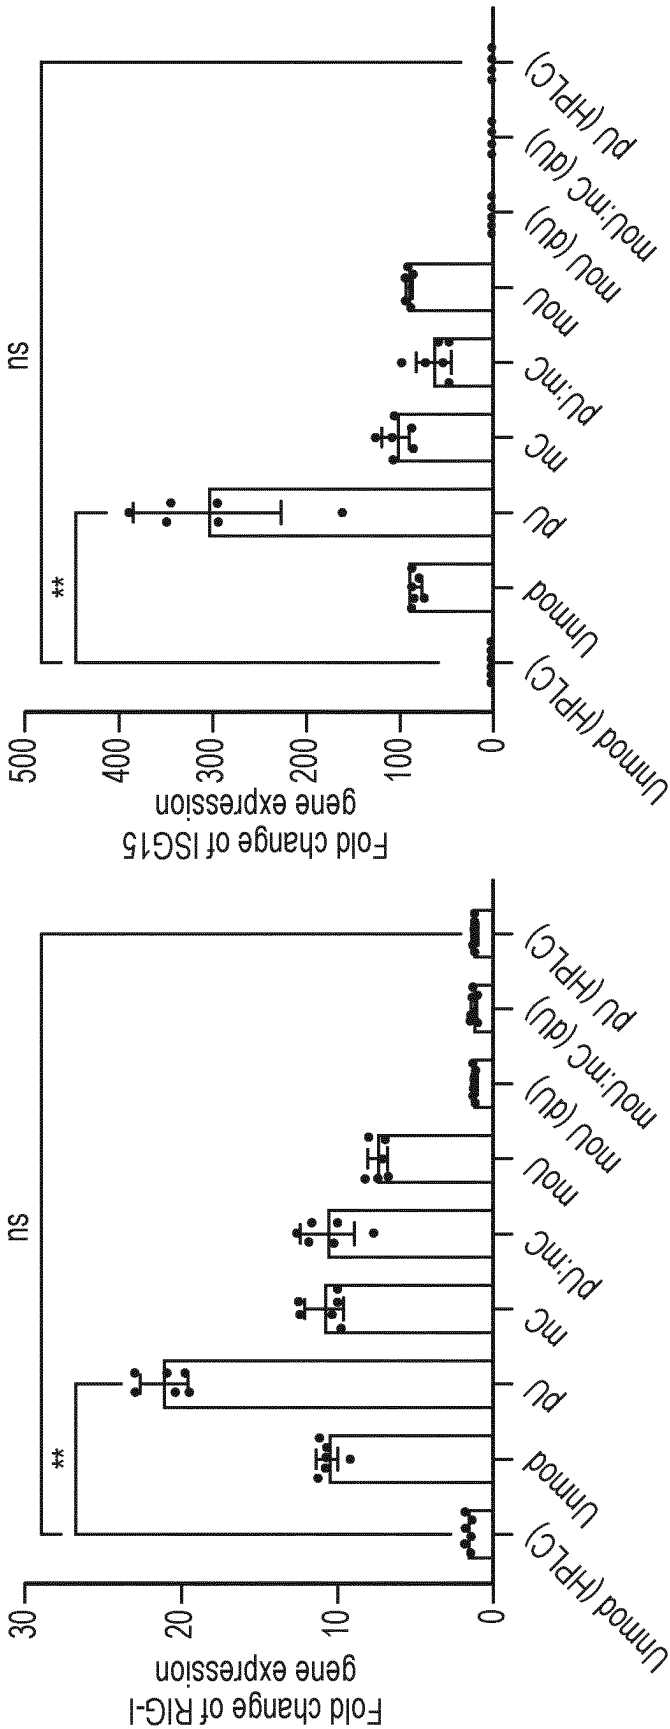


FIG. 9 (continued)

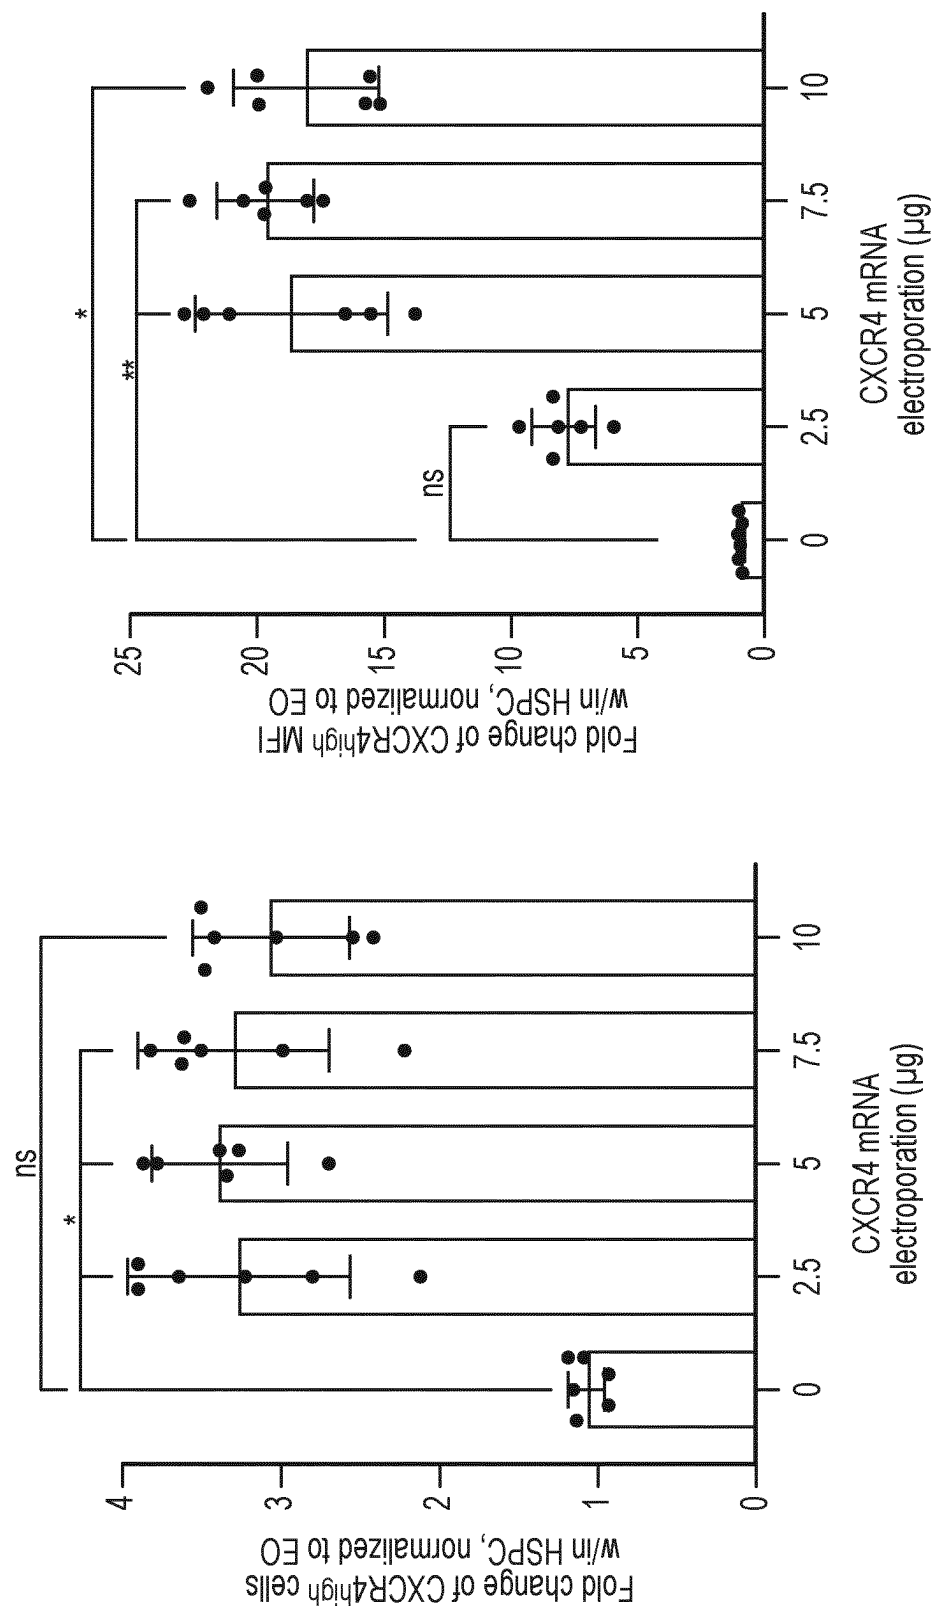


FIG. 9 (continued)

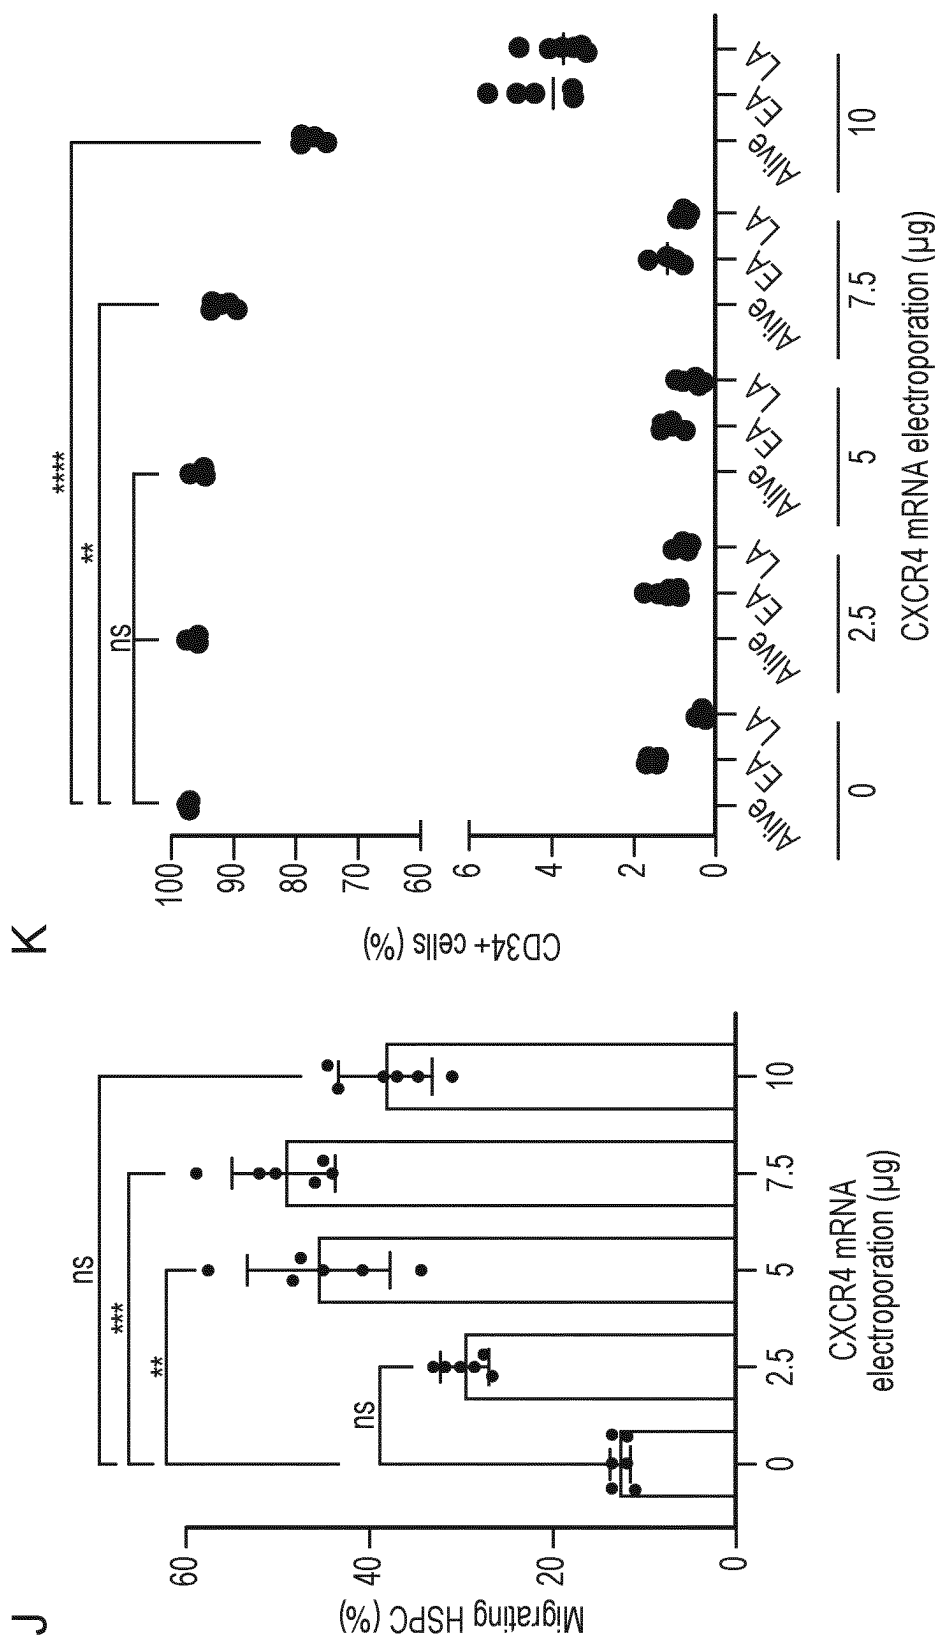


FIG. 9 (continued)

L

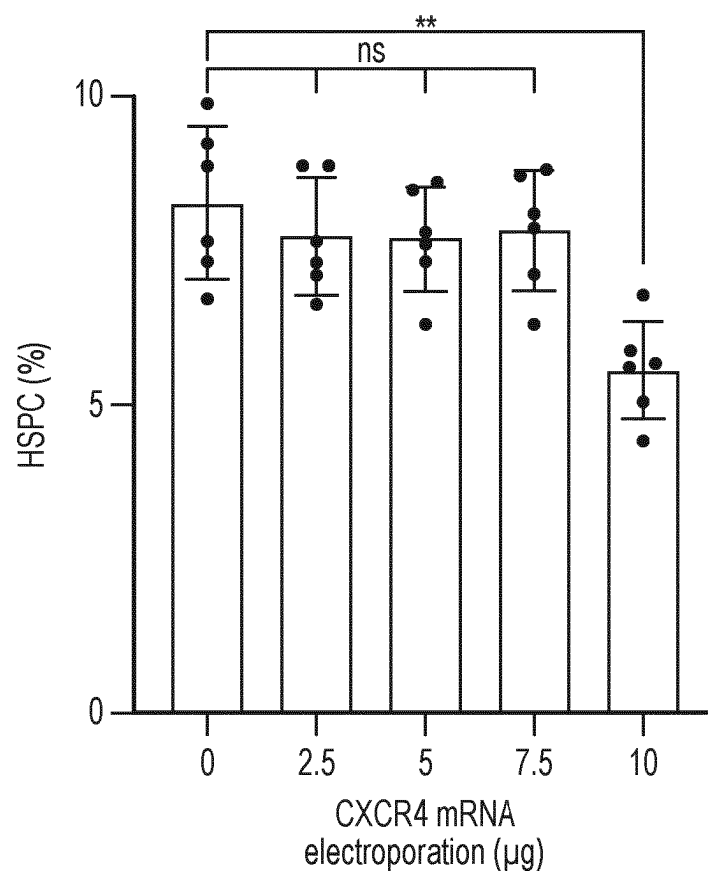


FIG. 9

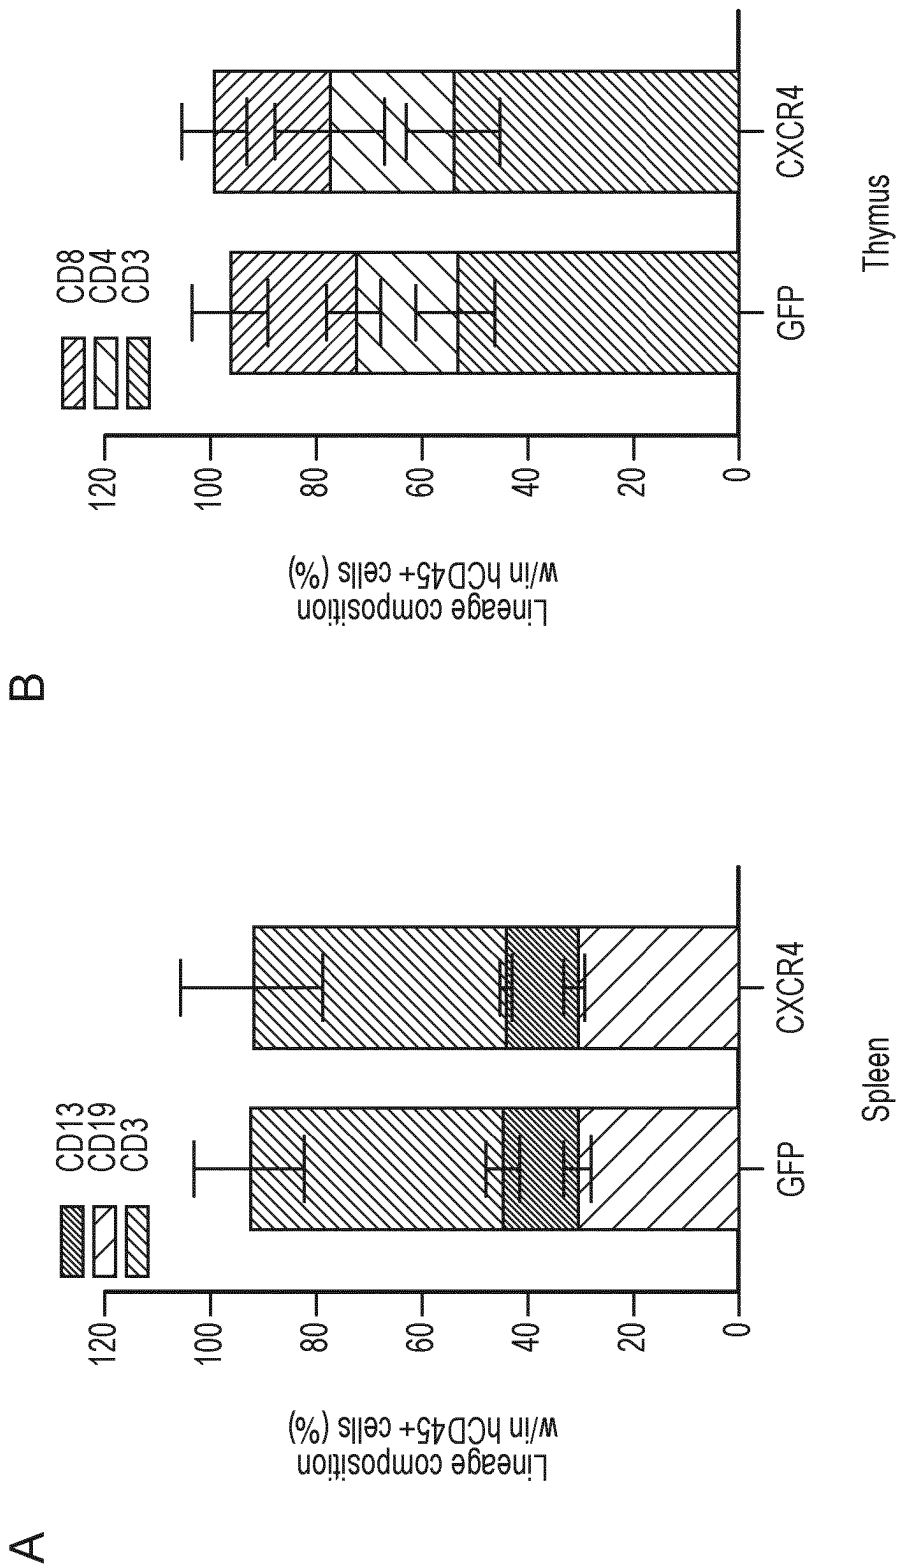


FIG. 10

C

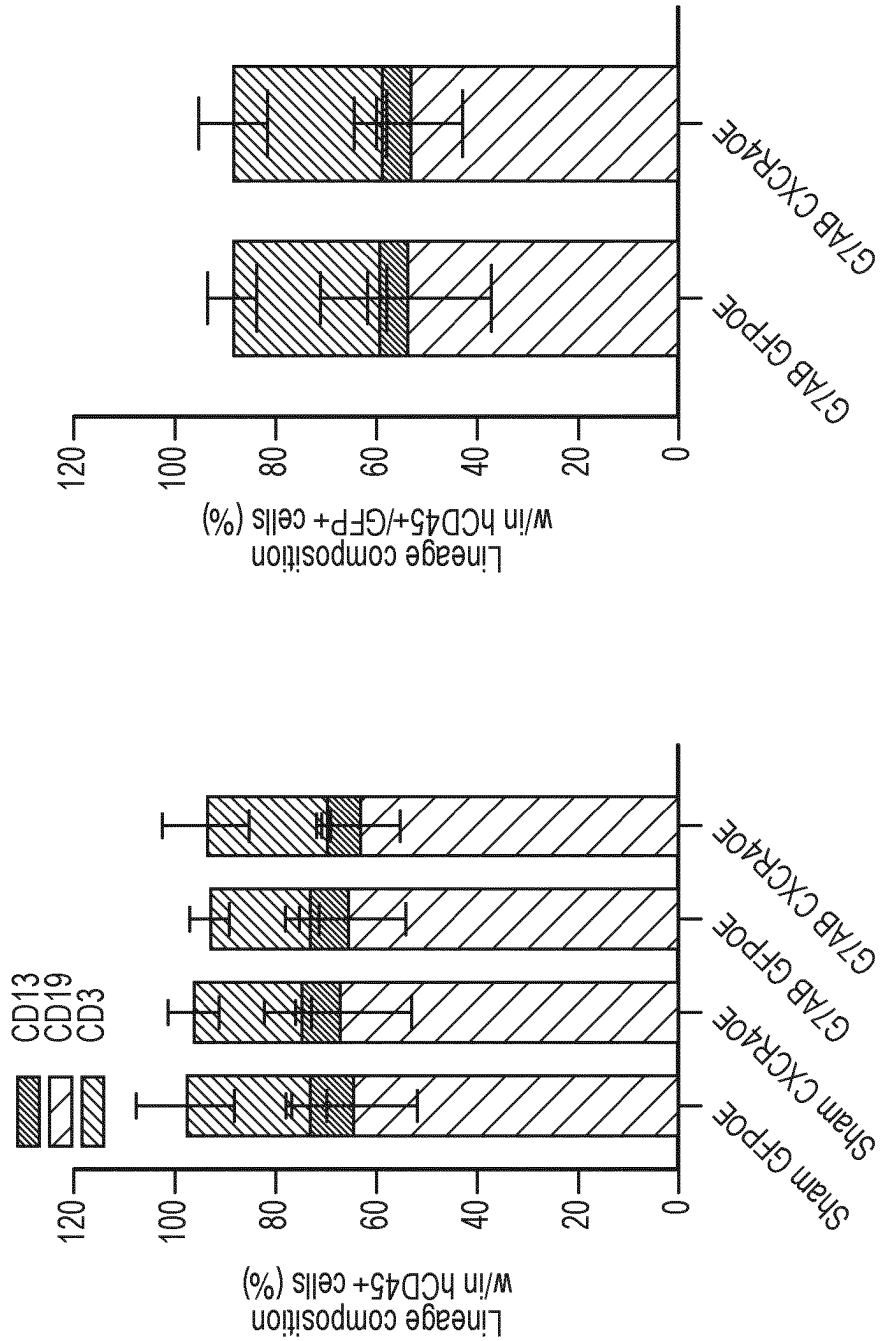


FIG. 10 (continued)

D

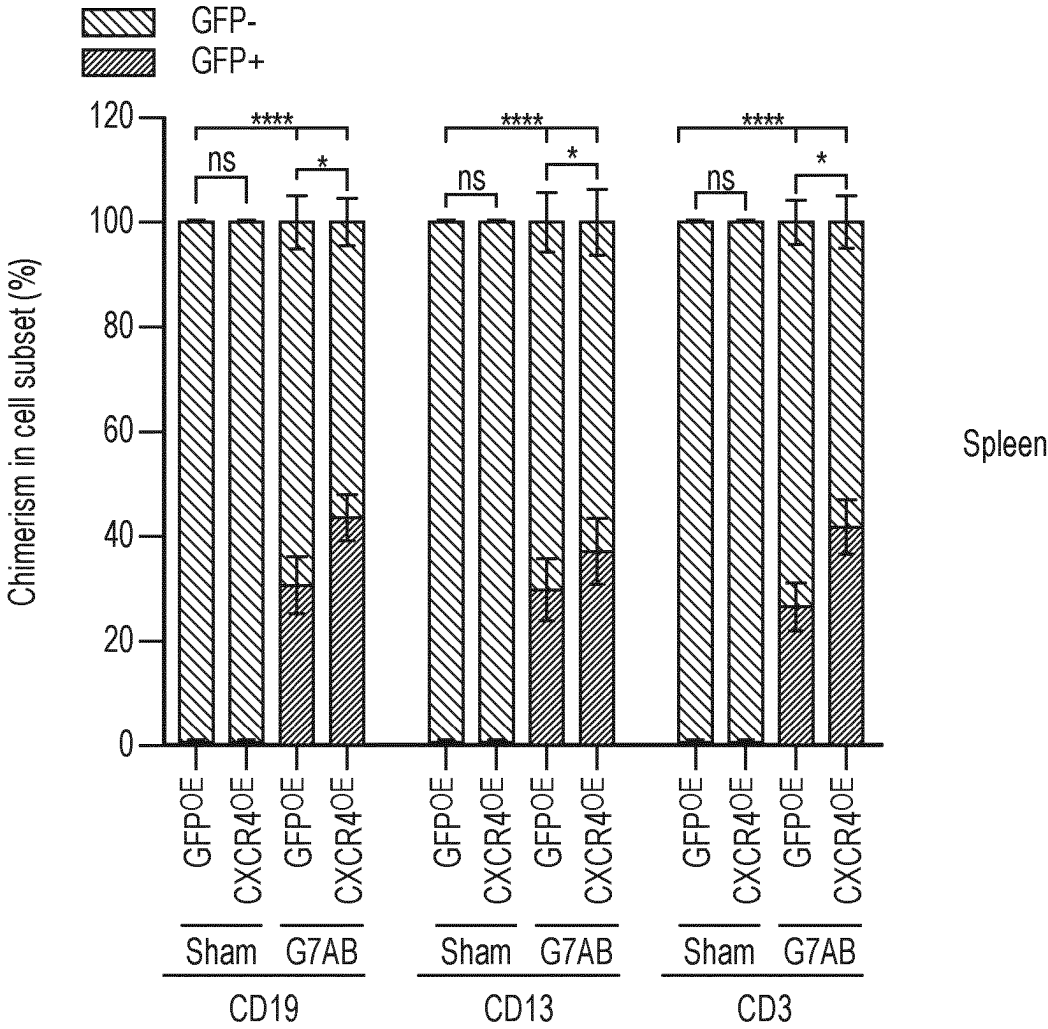


FIG. 10 (continued)

E

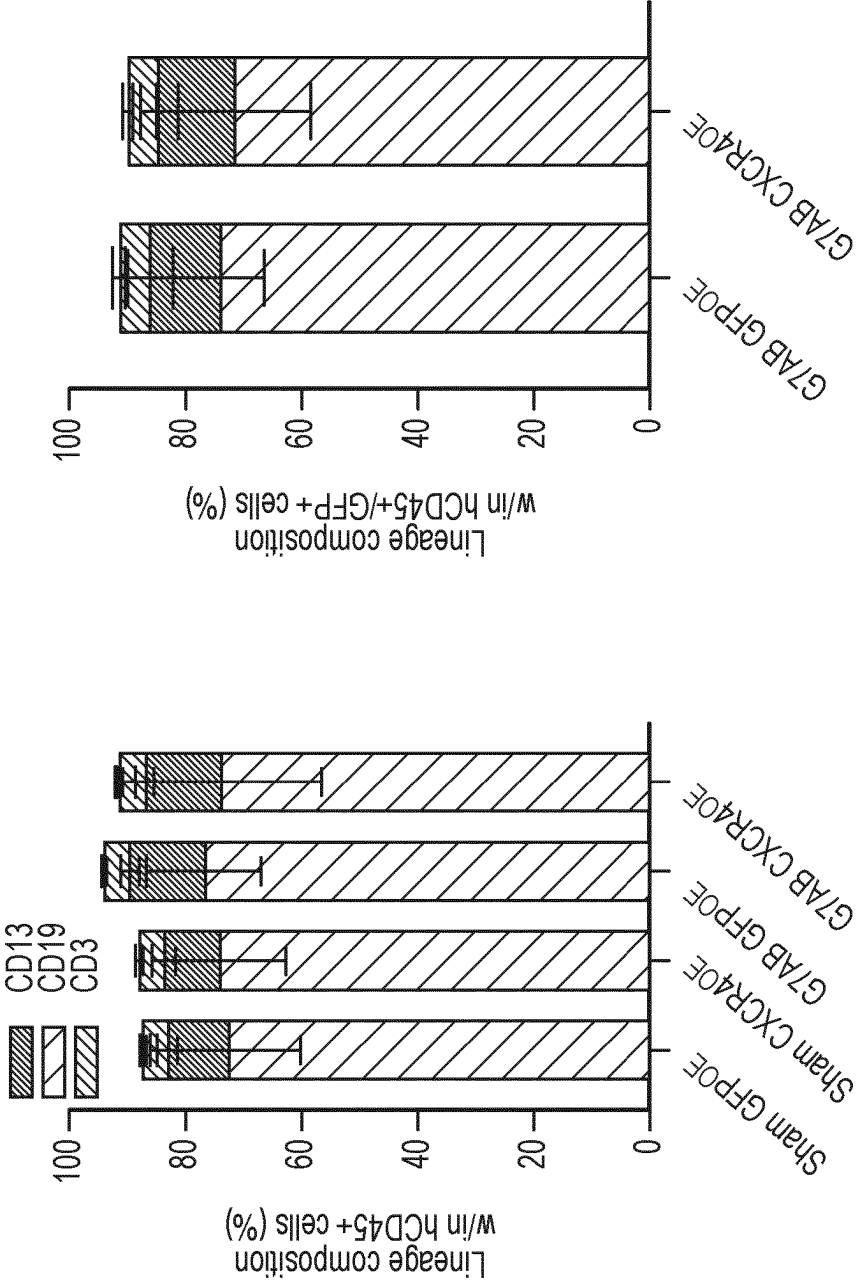


FIG. 10 (continued)

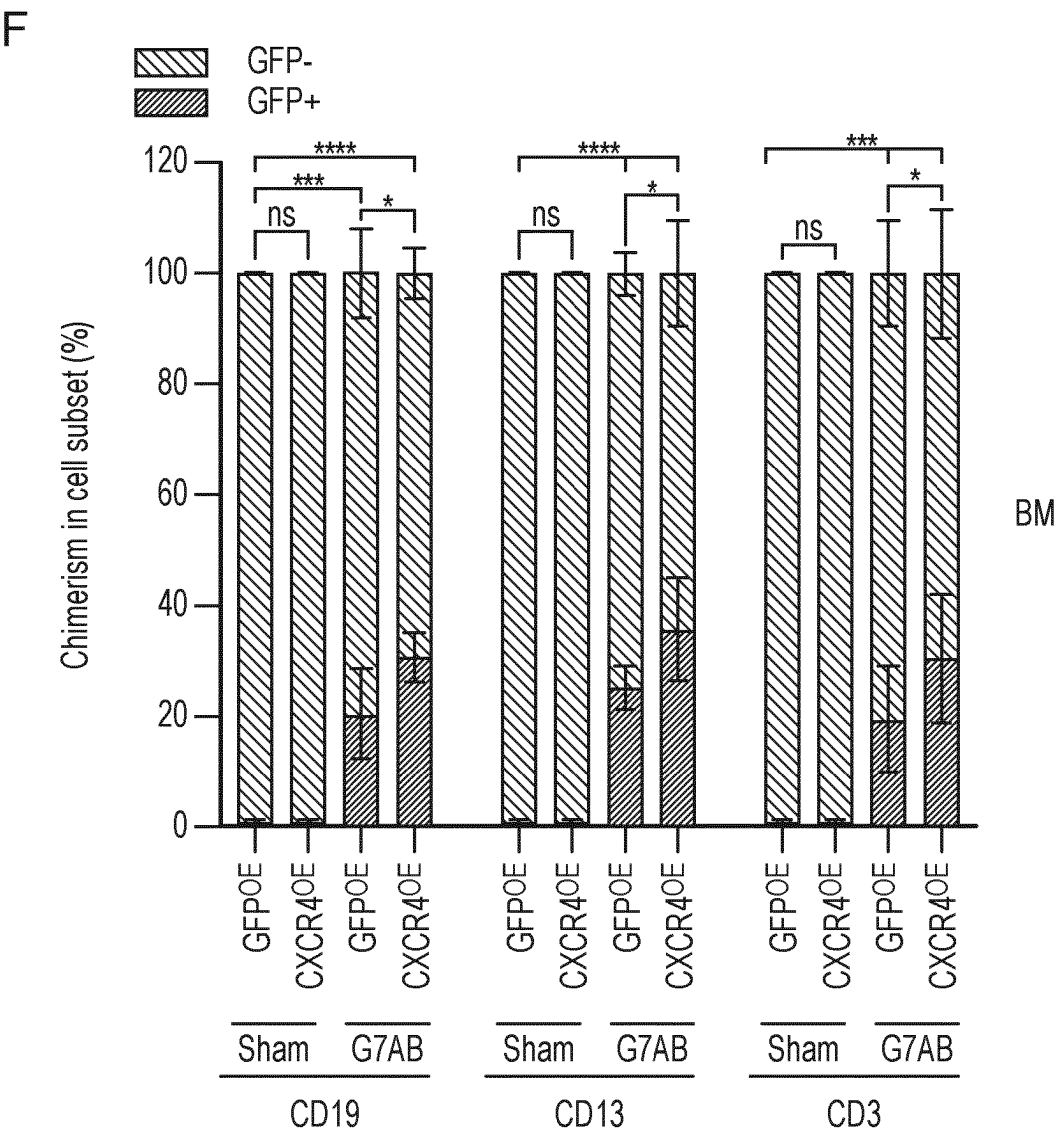


FIG. 10 (continued)

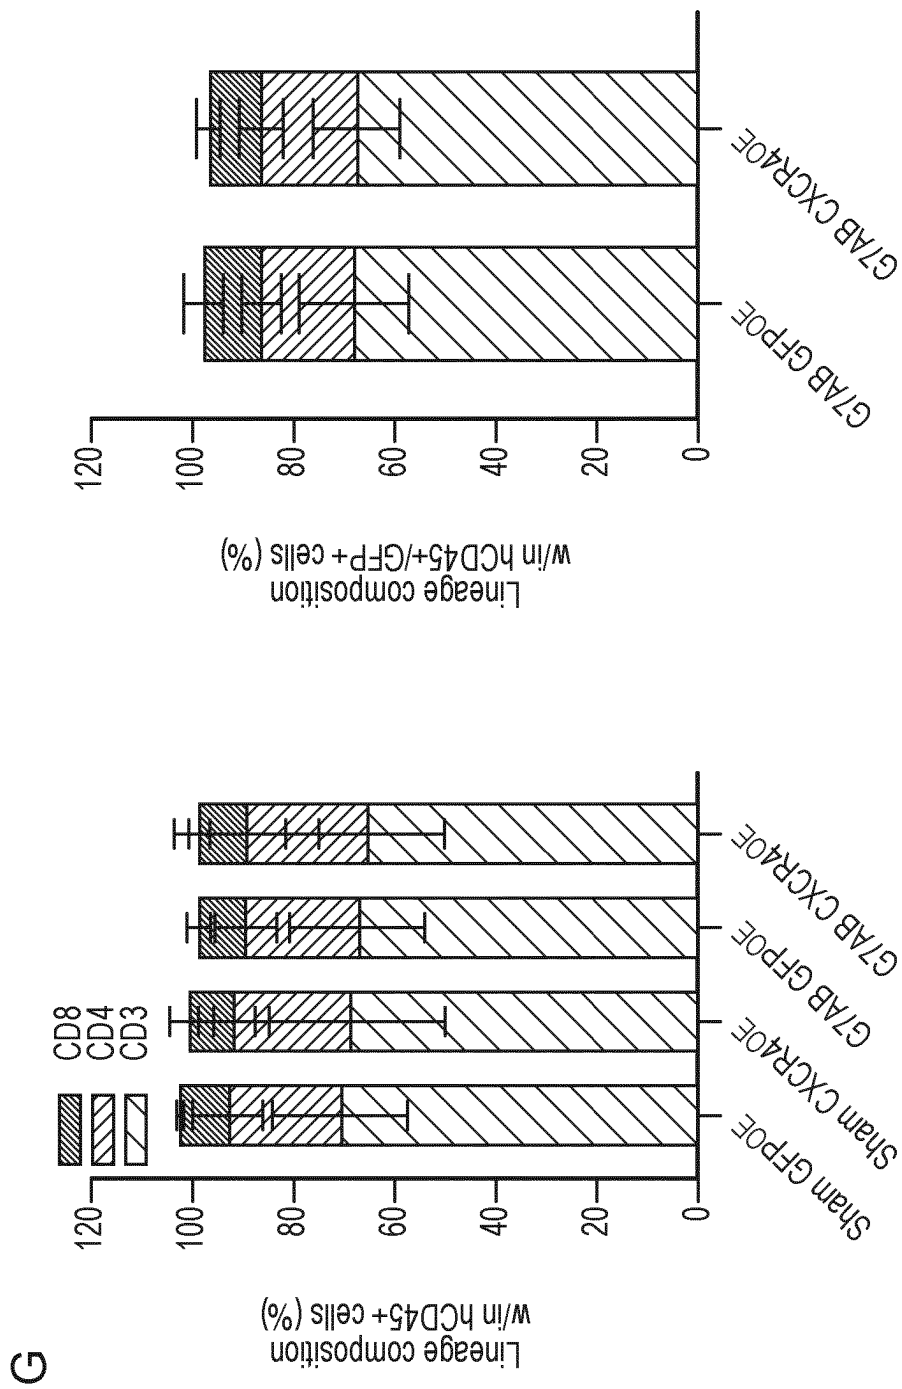


FIG. 10 (continued)

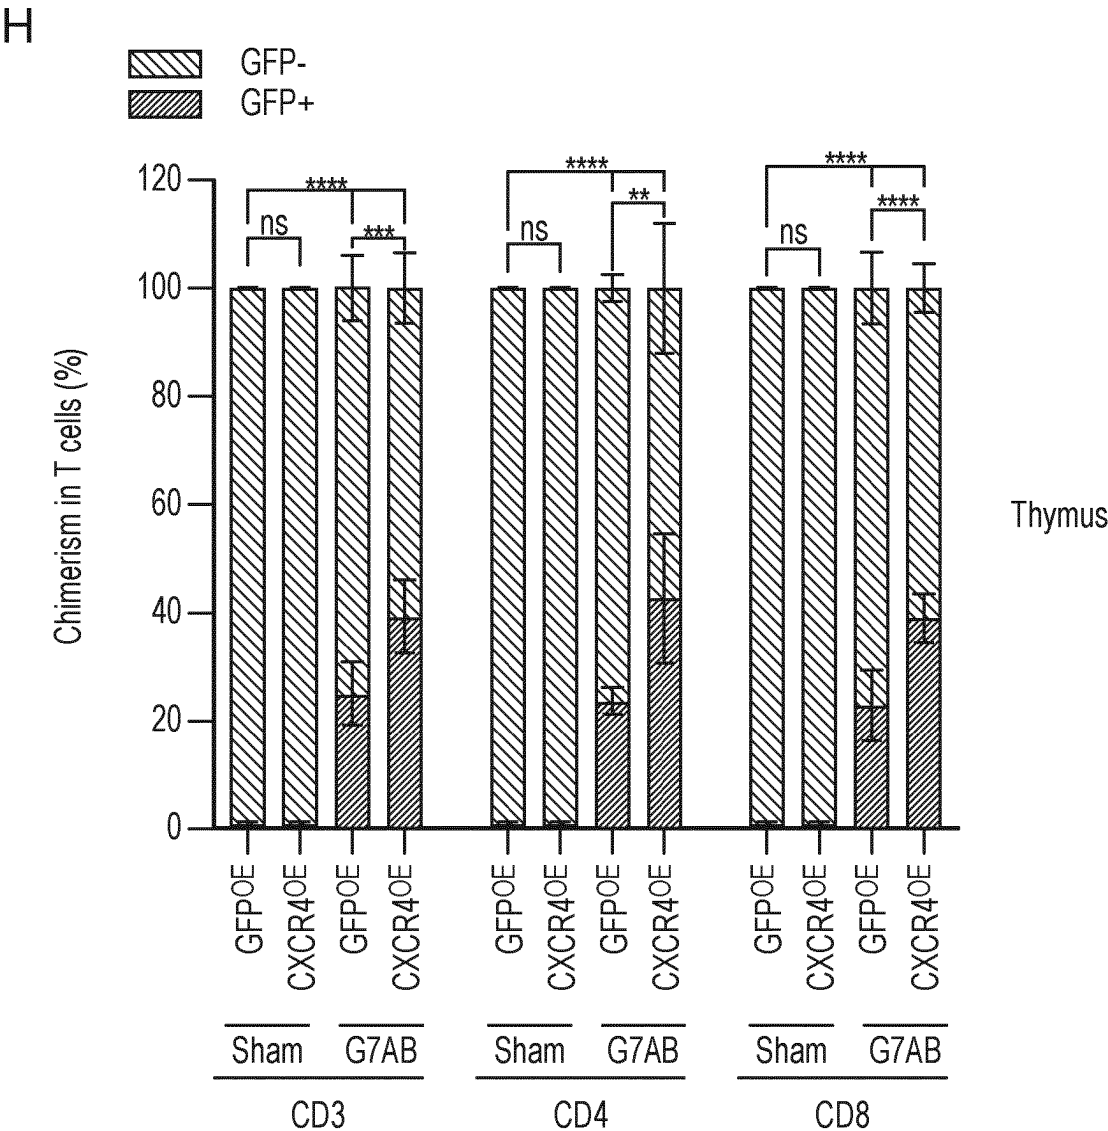


FIG. 10 (continued)

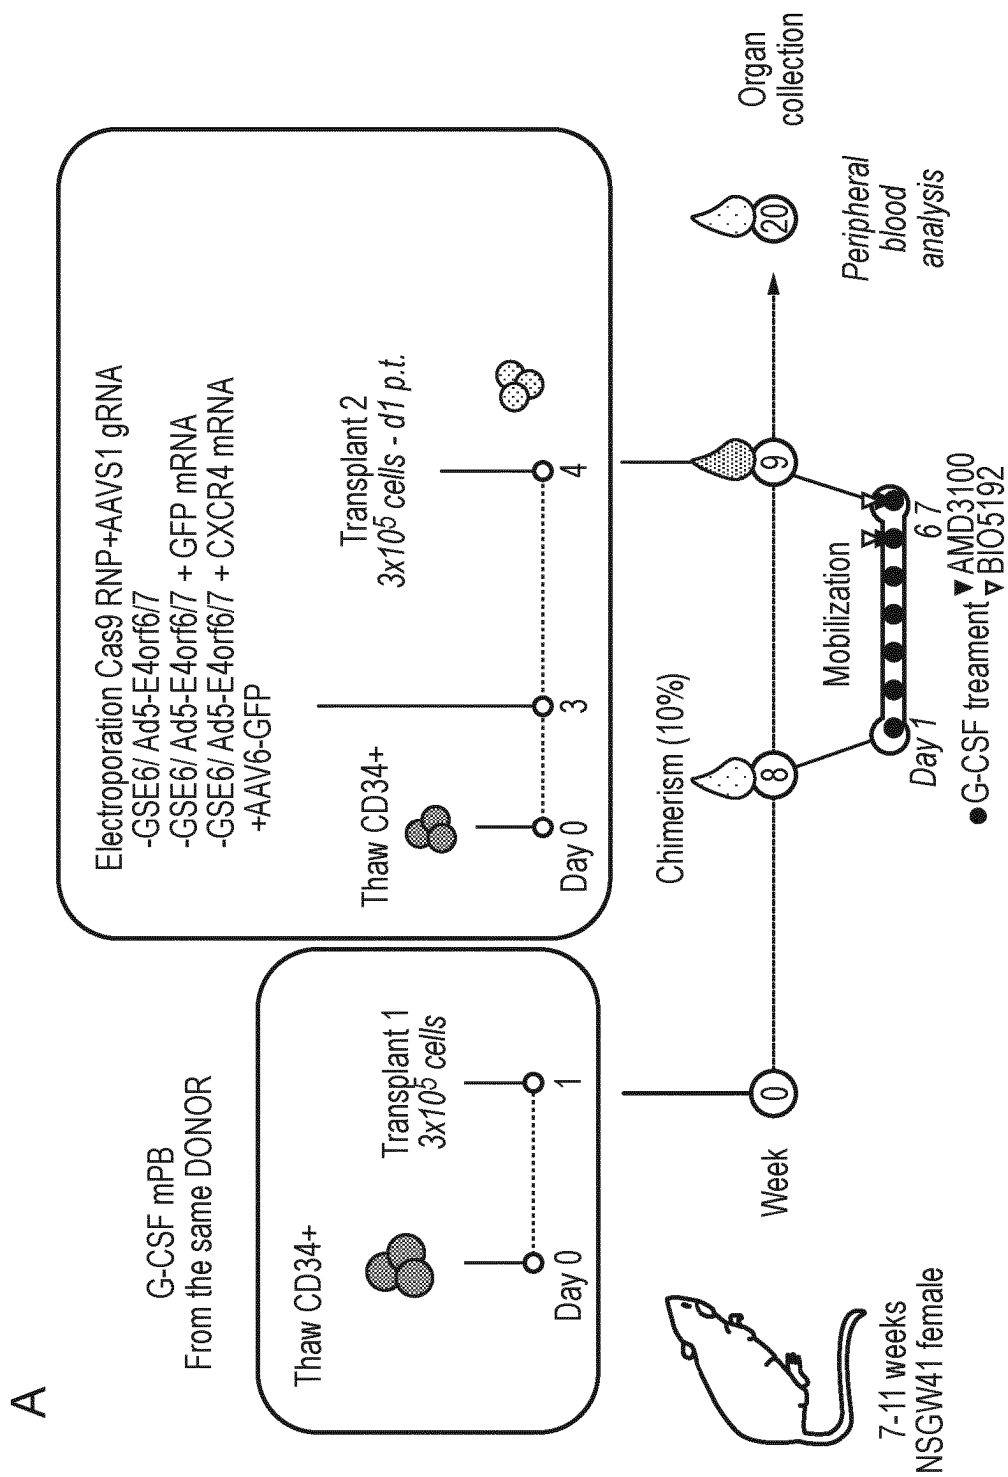


FIG. 11

B


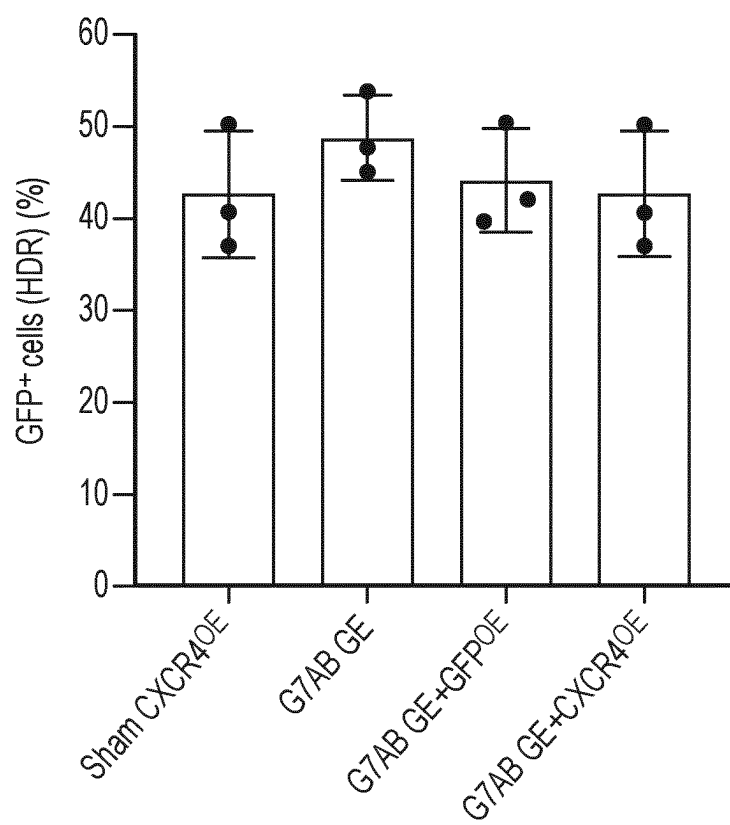


FIG. 11 (continued)

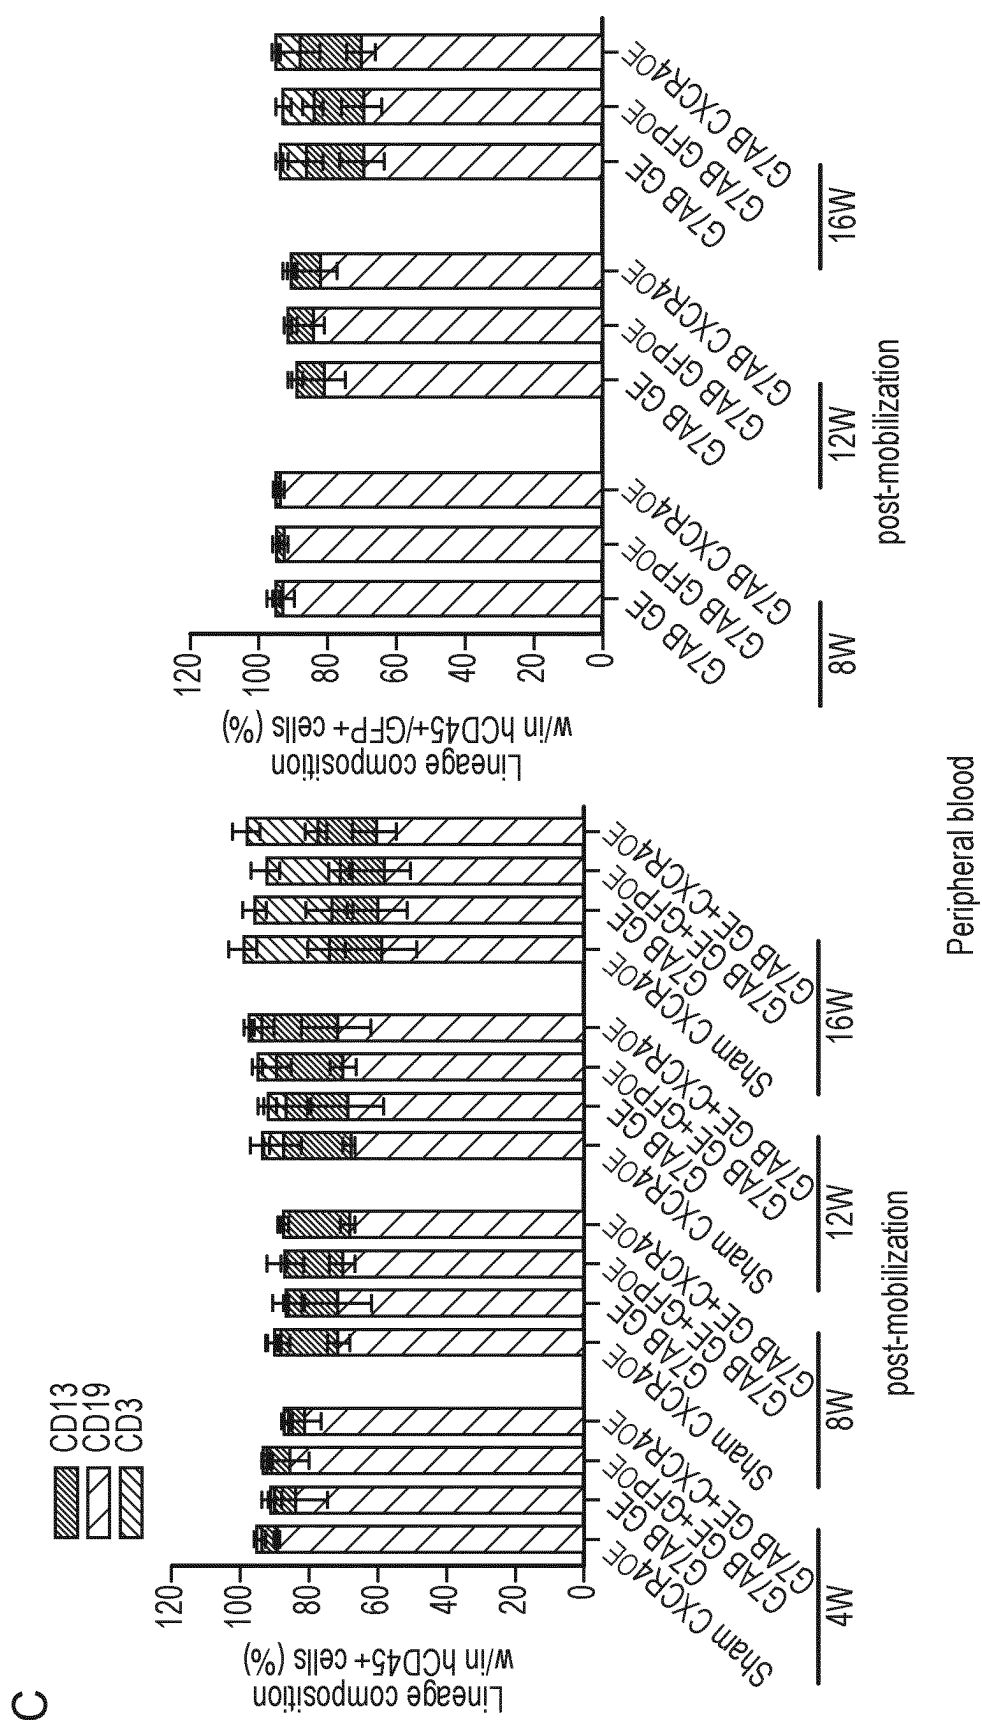

D

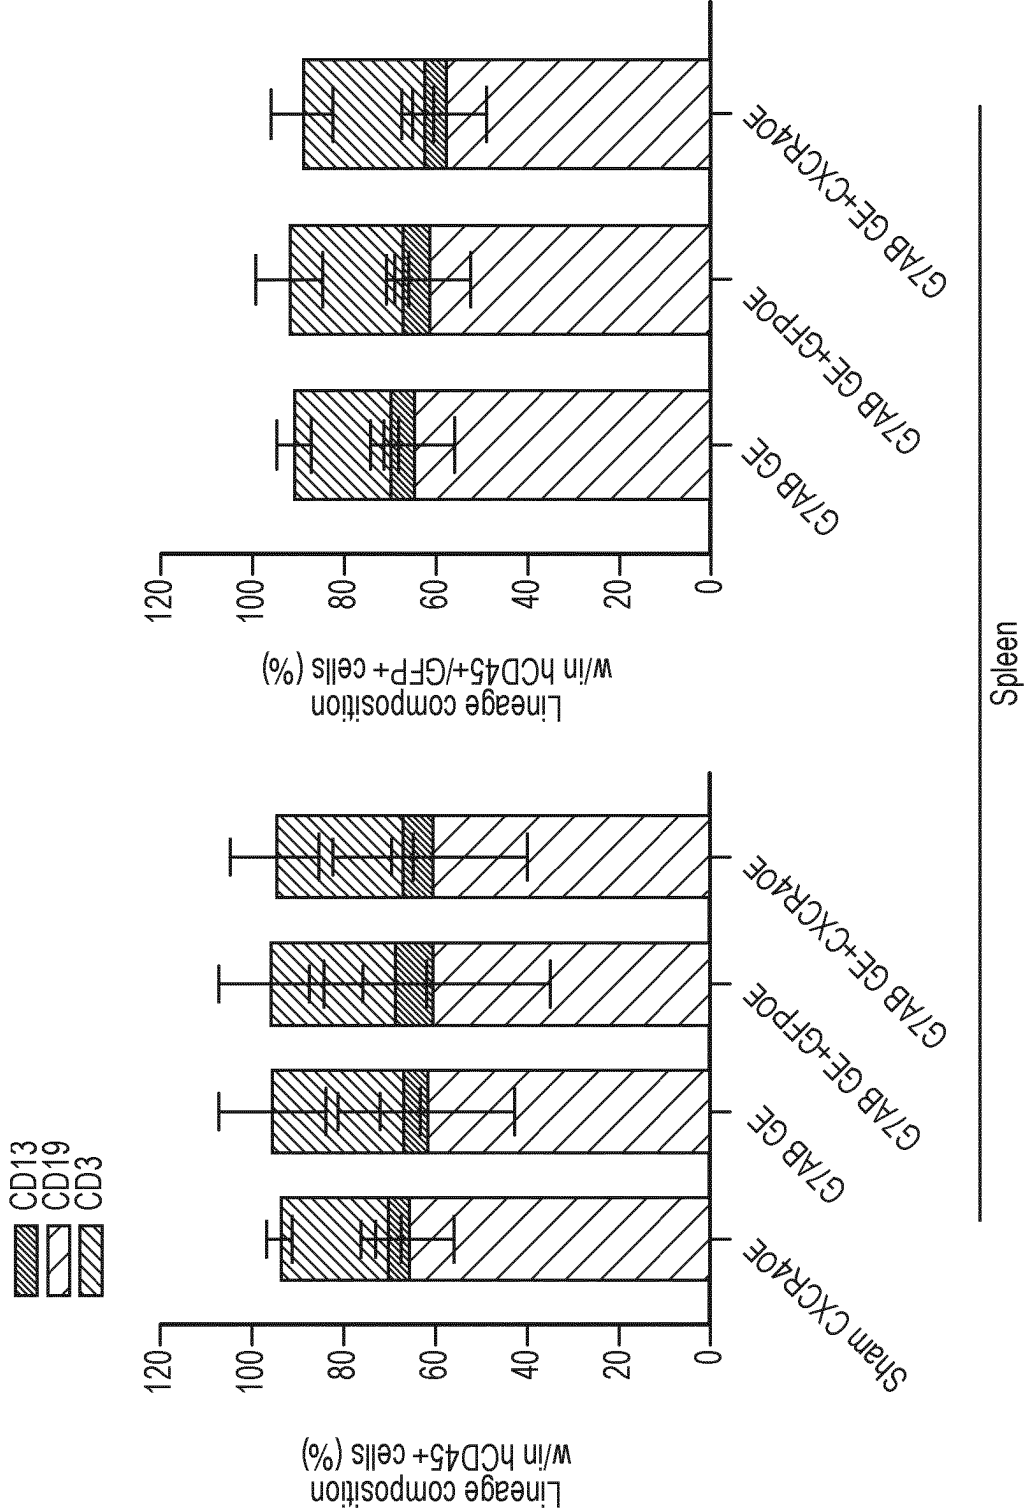


FIG. 11 (continued)

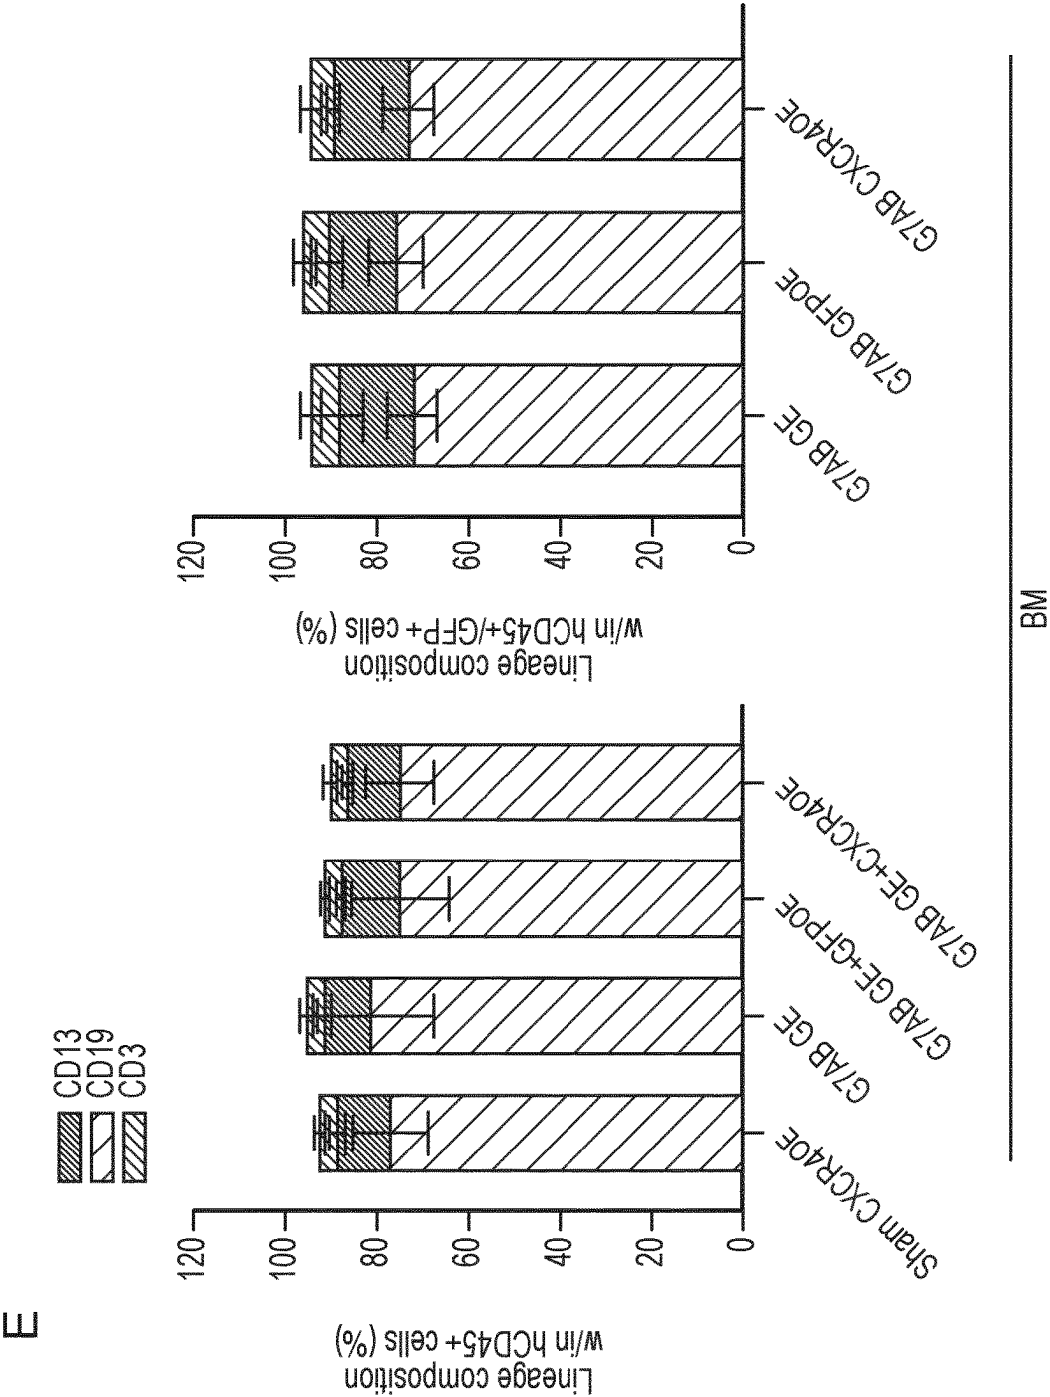


FIG. 11 (continued)

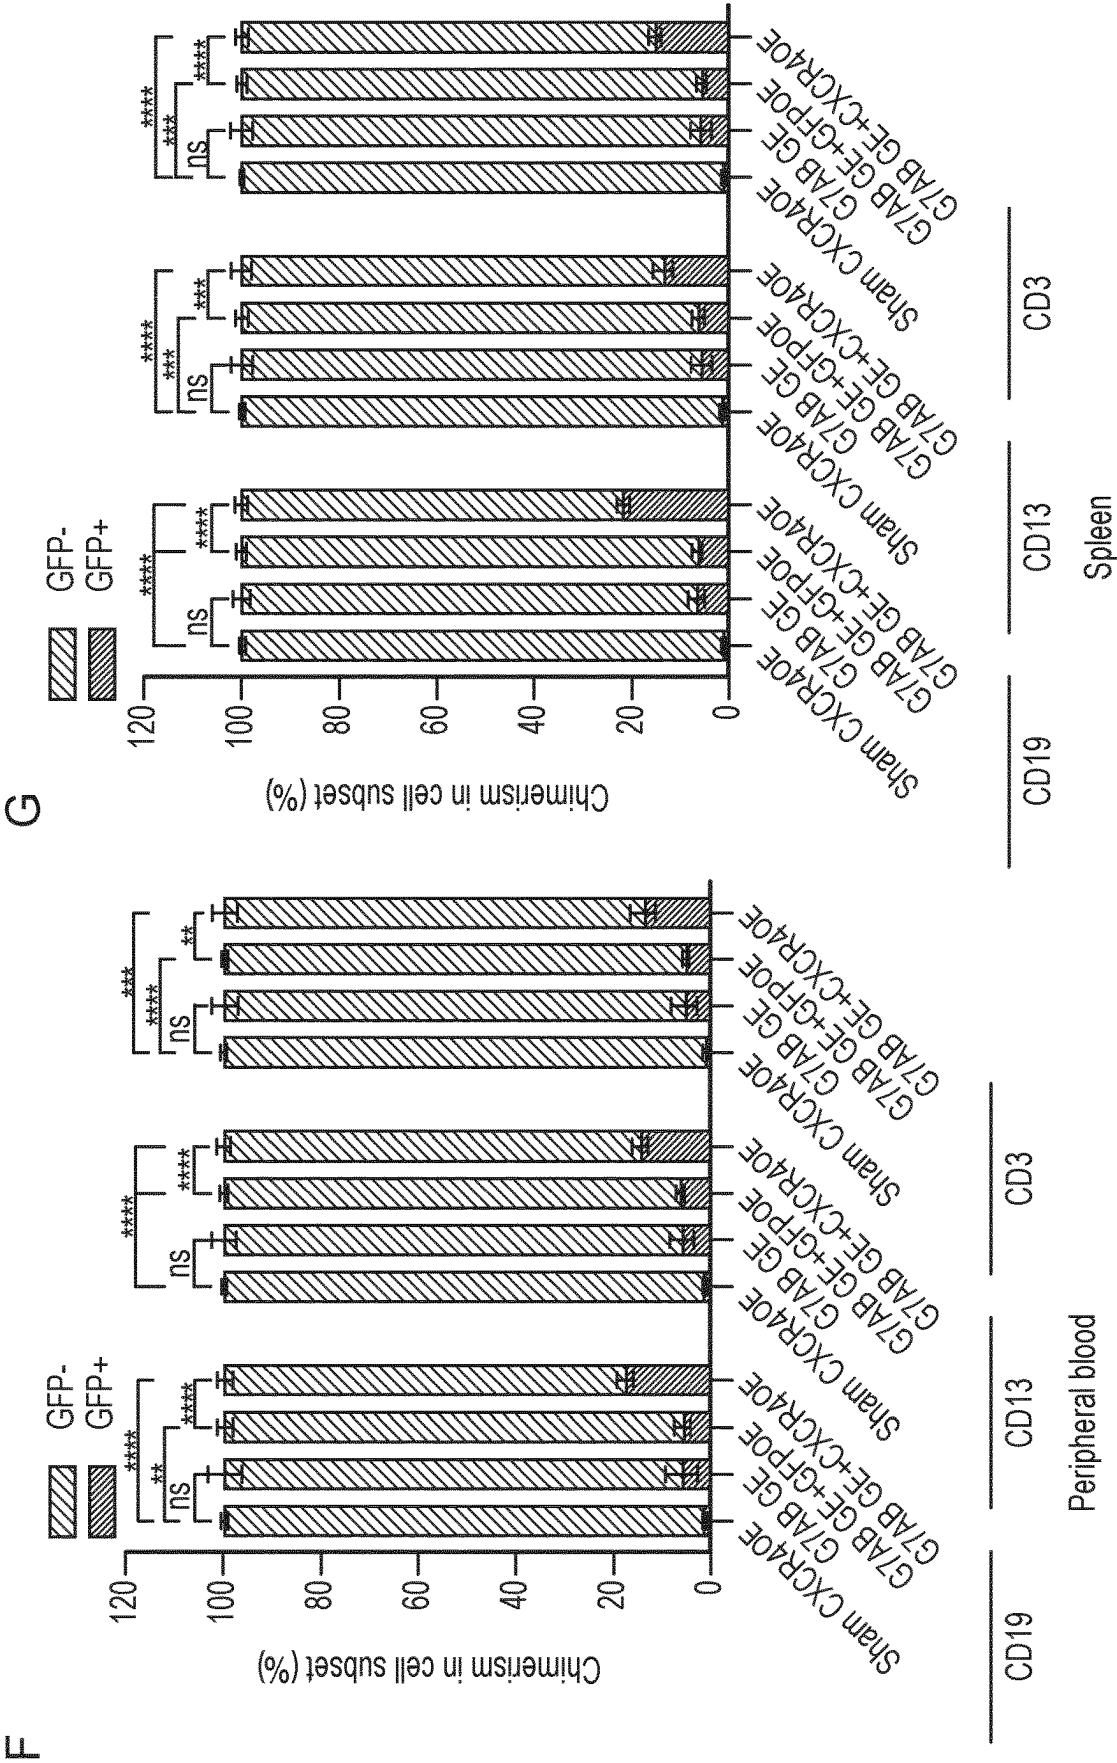


FIG. 11 (continued)

H

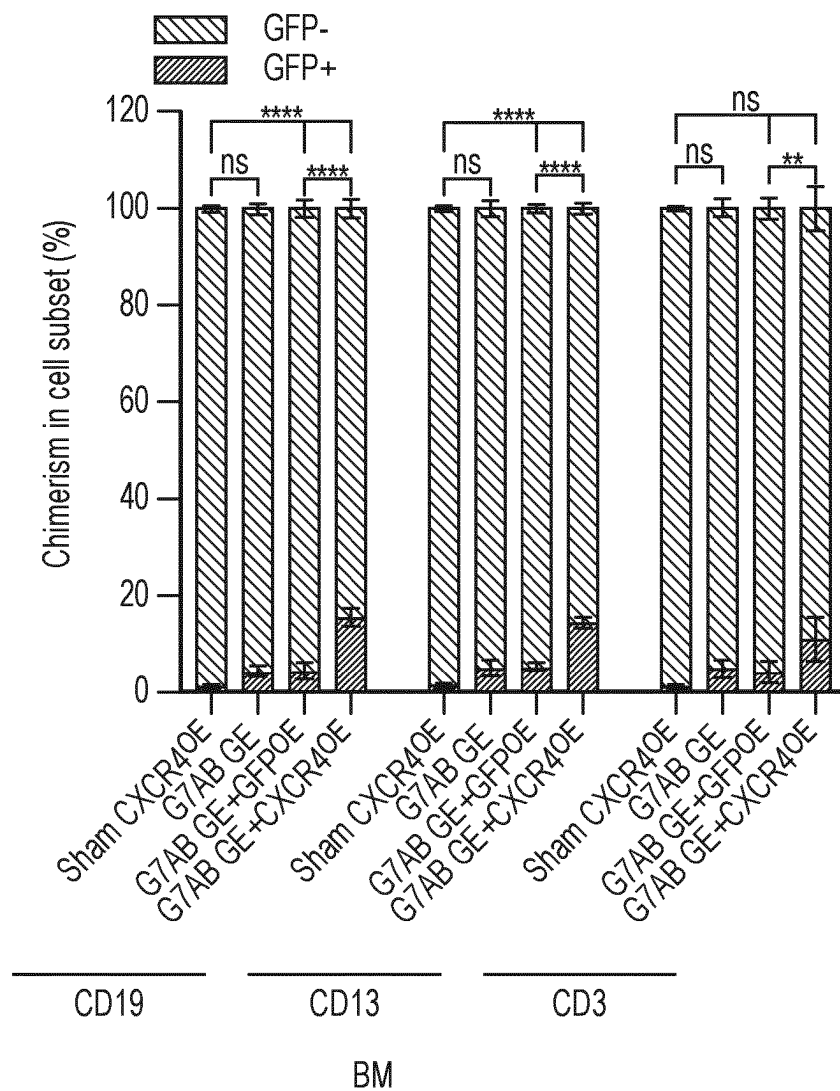


FIG. 11 (continued)

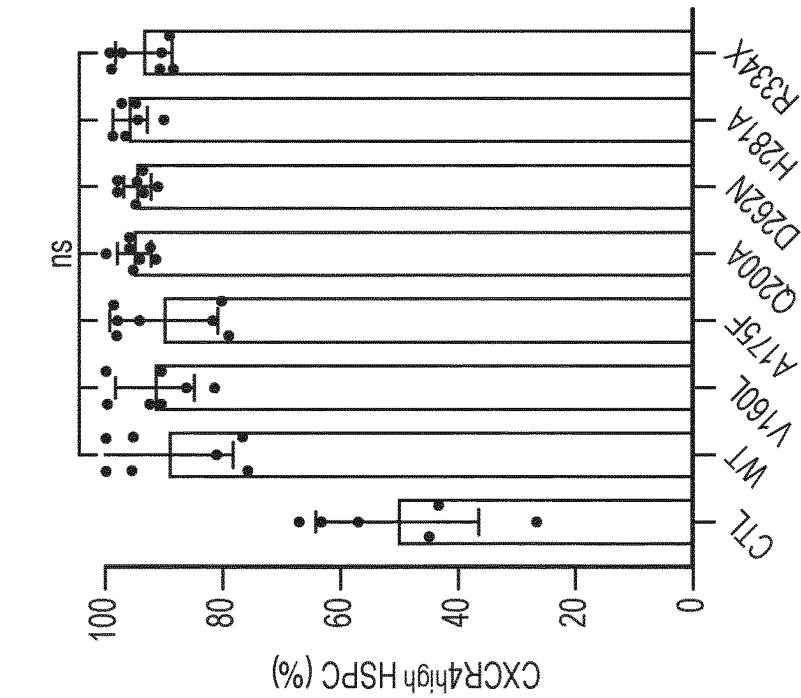
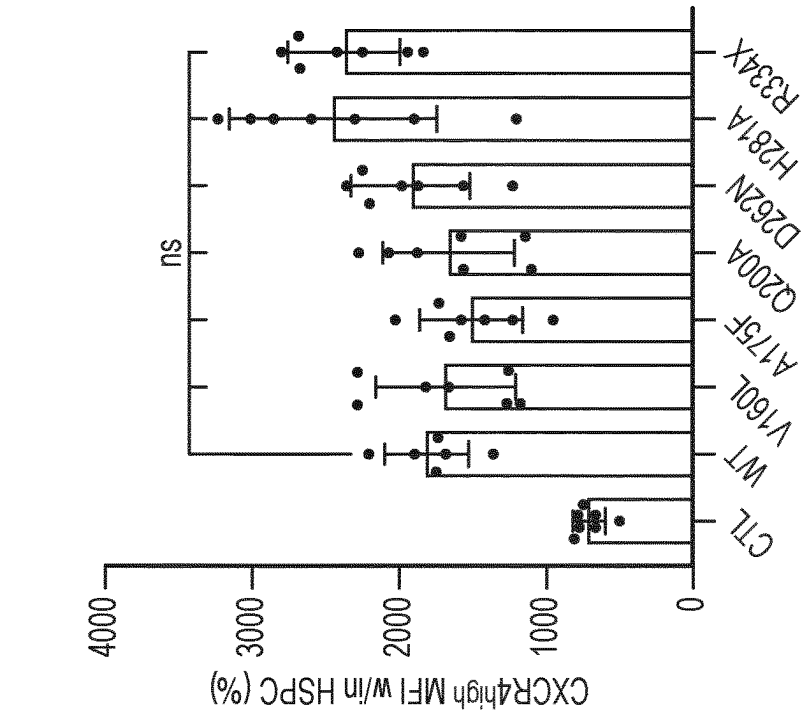


FIG. 11 (continued)

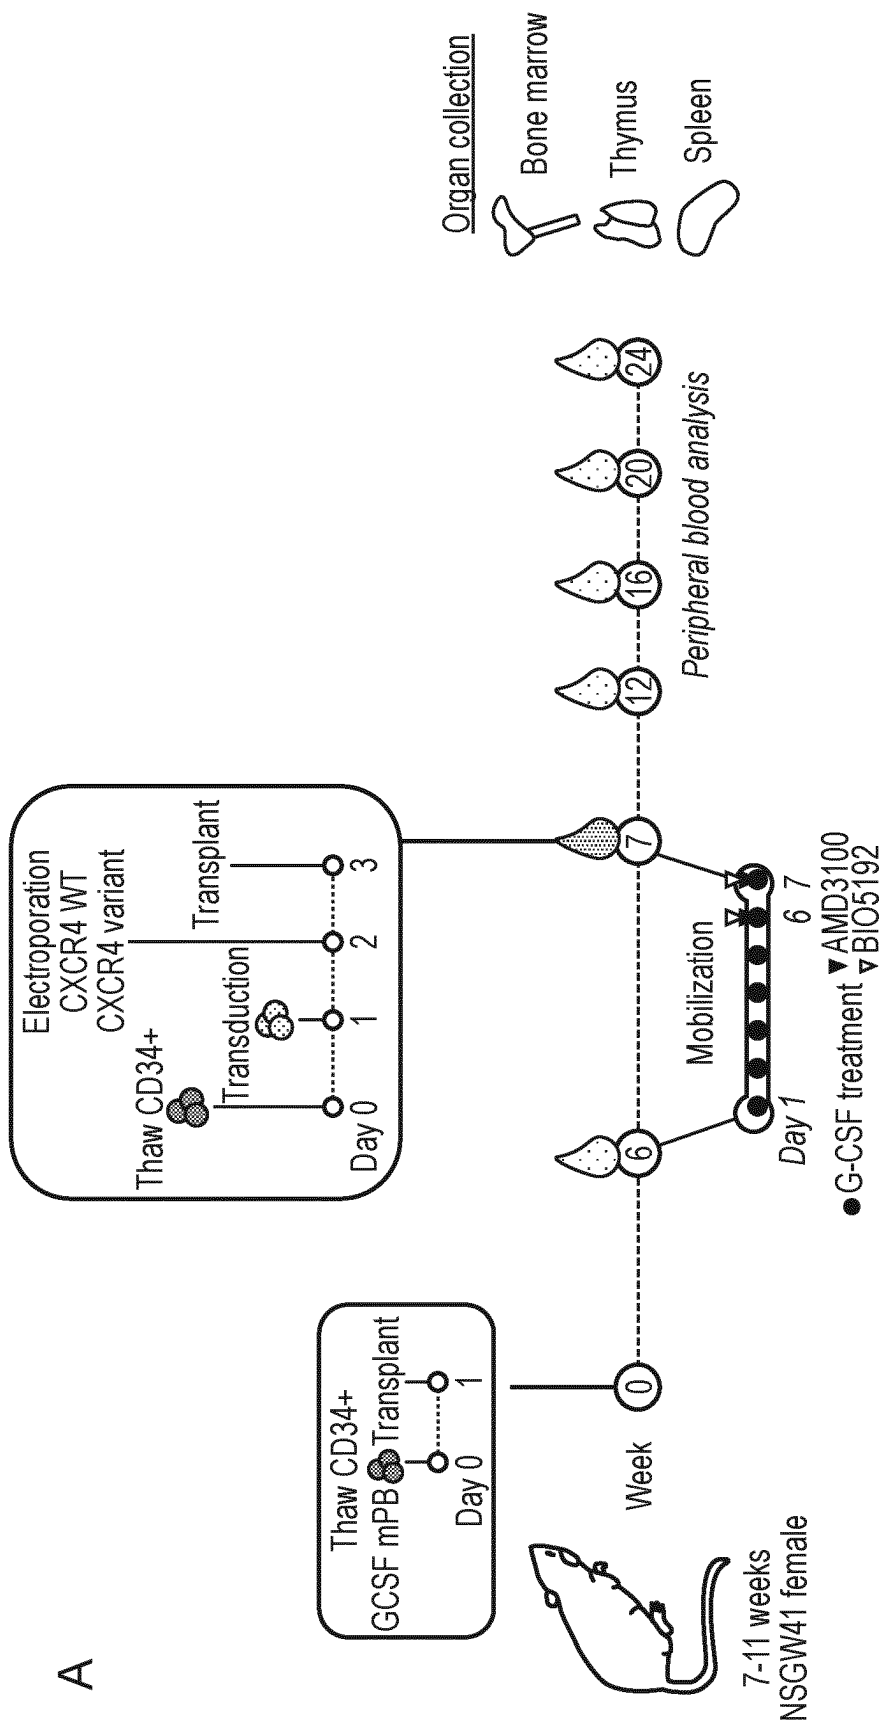


FIG. 12

B

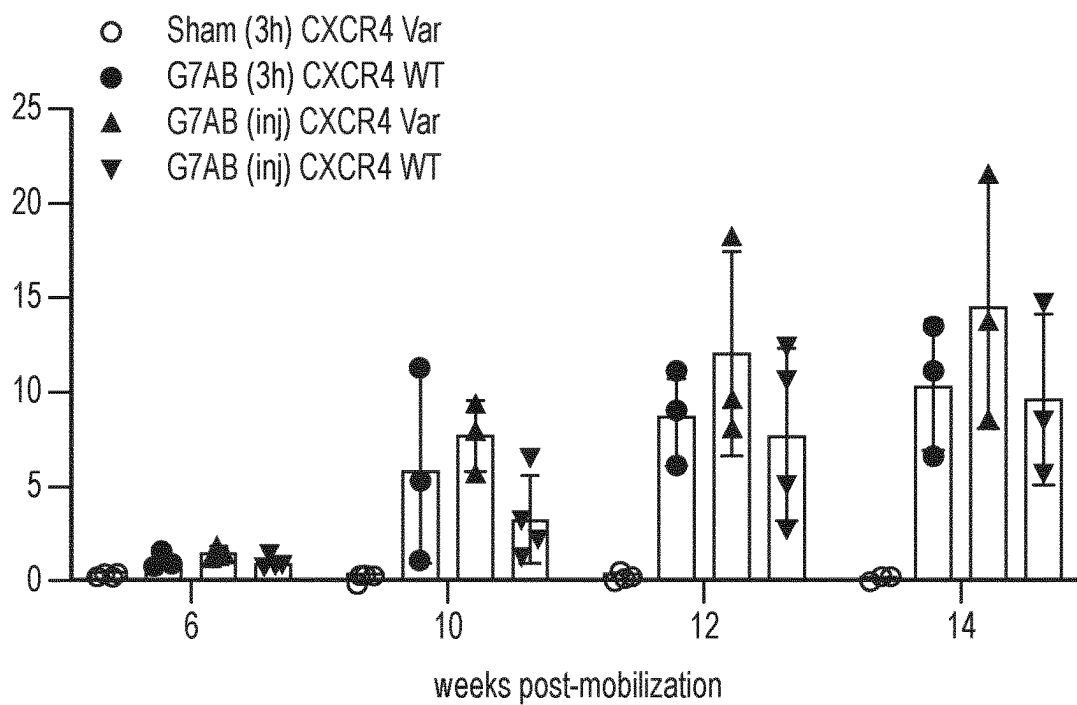
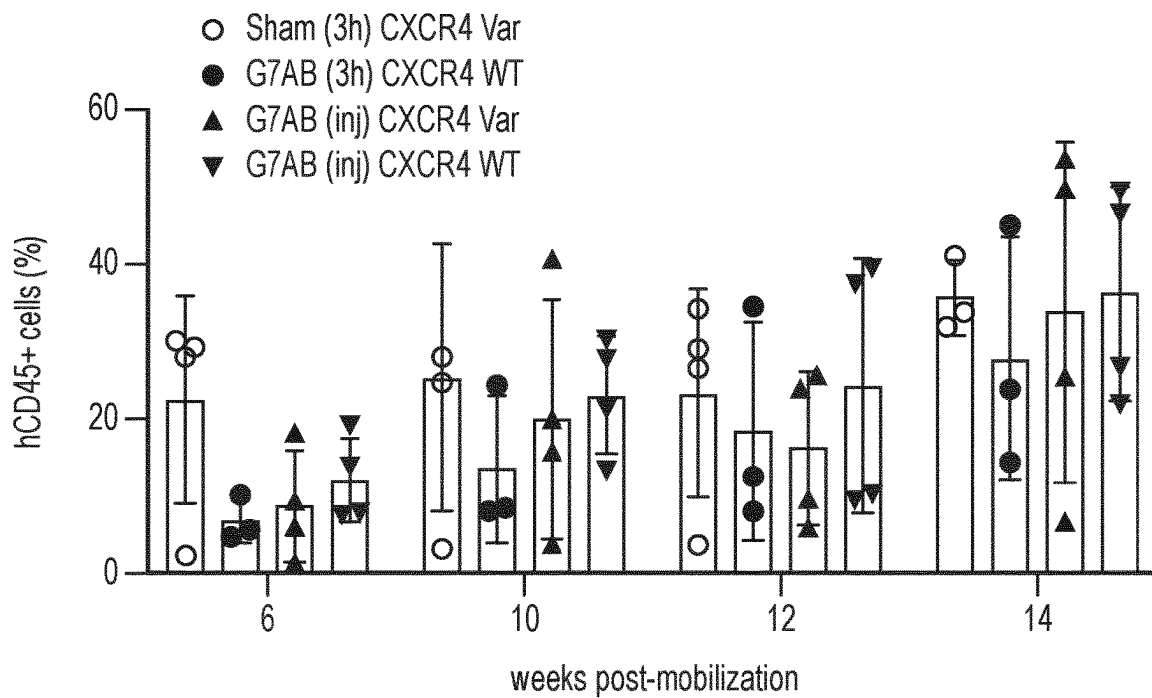


FIG. 12 (continued)

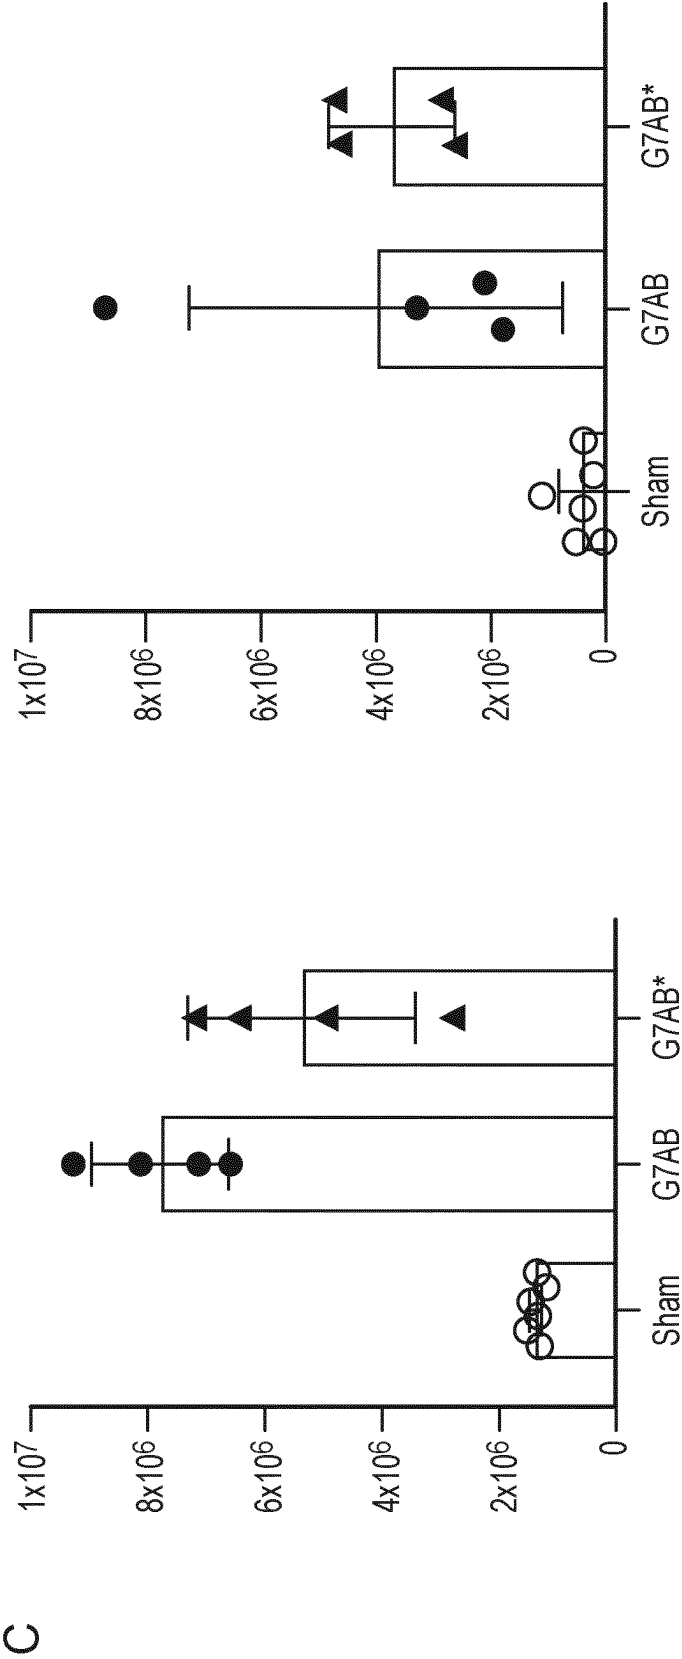


FIG. 12 (continued)

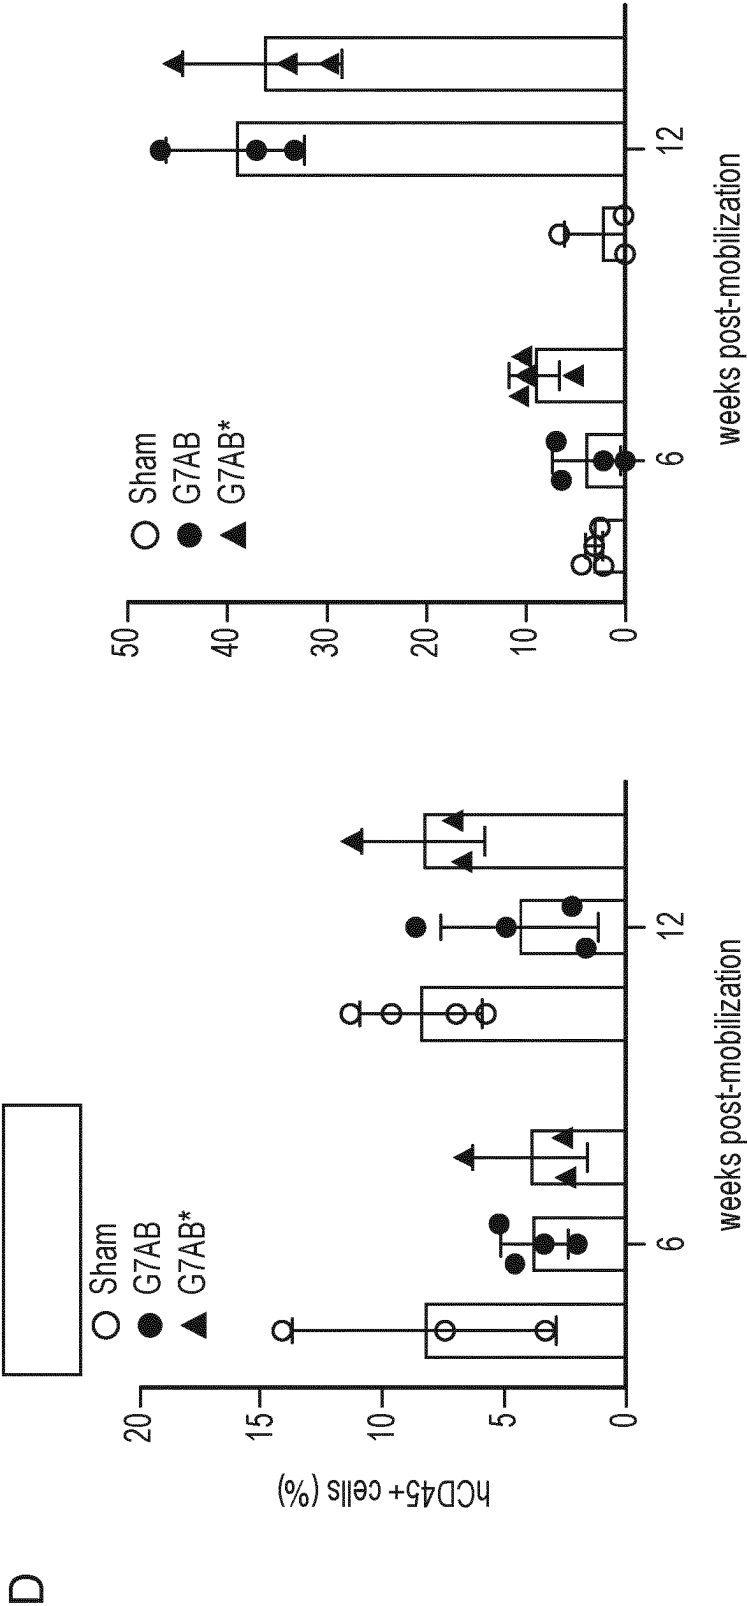


FIG. 12 (continued)

METHODS FOR HAEMATPOIETIC STEM CELL TRANSPLANTATION

FIELD OF THE INVENTION

[0001] The present invention relates to methods for haematopoietic stem and/or progenitor cell (HSPC) transplantation. The invention also relates to the genetic modification of HSPCs for improving their engraftment during transplantation. The invention also relates to an RNA polynucleotide, and DNA polynucleotides and vectors encoding the same.

BACKGROUND TO THE INVENTION

[0002] Hematopoietic stem cell transplantation (HSCT) is used to treat patients suffering from malignant and inherited diseases such as primary immunodeficiencies, Fanconi anemia, hemoglobinopathies and lysosomal storage disorders (see e.g. Granot, N., and Storb, R. (2020). *Haematologica* 105, 2716-2729).

[0003] However, the morbidity of HSCT remains of concern, in particular when considering application to non-malignant diseases. The main cause of HSCT morbidity, when using an allogeneic source of HSPCs, resides in the life-threatening and debilitating graft versus host disease (GvHD), and in the long-term irreversible complications (such as secondary malignancies) arising from the genotoxic side effects of conditioning regimens, which are required to deplete HSPCs residing in the bone marrow (BM) to make space for the donor HSPCs (see e.g. Copelan, E. A., et al. (2019). *Blood Rev* 34, 34-44).

[0004] The development of effective gene correction methods promoted the use of autologous HSPCs to treat inherited diseases (see e.g. Ferrari, G., et al. (2021). *Nat Rev Genet* 22, 216-234). While autologous HSPC gene therapy (HSPC-GT) eliminates the risk of GvHD, it maintains the requirement for partial or fully myeloablative conditioning. Current regimens involve non-specific, chemo- or radio-therapeutic treatments that have multiple short- and long-term adverse effects, and cause a prolonged immune suppression predisposing patients to severe and fatal infections (see e.g. Gyurkocza, B., and Sandmaier, B. M. (2014). *Blood* 124, 344-353). These treatments also damage the BM stroma and HSPC niche architecture and may in turn adversely affect the extent and kinetics of cells engraftment.

[0005] Strategies to bypass conditioning by increasing the input of donor cells or in vitro expansion prior to infusion have proved to be either inefficient or are currently not compatible with clinical use of human HSPCs. Strategies which use specific drugs that target HSPCs in the BM niche and spare non-hematopoietic cells (e.g. monoclonal antibodies coupled or not with toxin) are now reaching clinical testing, although profound cytopenias might result from the degree of ablation needed for sufficient engraftment.

[0006] Thus, there is a need for further strategies that reduce genotoxic conditioning regimens before HSPC transplantation

[0007] When the conditioning is milder, engraftment becomes a competitive process between endogenous and infused HSPCs (see e.g. Socie, G., et al. (1995). *Leukemia Res* 19, 497-504). Competition with residual cells in the recipient might be impaired when the infused cells undergo ex vivo genetic engineering. Culture conditions, exposure to viral vectors and electroporation of editing machinery can variably induce HSPC differentiation or apoptosis and

modify expression of cell surface molecules relevant for BM homing and engraftment (see e.g. Hall, K. M., et al. (2006). *Exp Hematol* 34, 433-442). In addition, DNA double strand breaks induced by nuclease-based editors during HSPC gene editing may trigger a DNA damage response that limits hematopoietic repopulation (see e.g. Schirotti, G., et al. (2019). *Cell Stem Cell* 24, 551-565.e8).

[0008] Thus, there is a need for more efficient strategies to improve the ability of HSPCs to home and permanently repopulate the recipient BM.

SUMMARY OF THE INVENTION

[0009] The inventors have developed HSCT strategies using HSPC mobilization as a conditioning regimen. HSPC mobilizers create an opportunity for seamless engraftment of exogenous HSPCs, which may effectively outcompete the mobilized endogenous HSPCs, to repopulate the depleted BM. The exogenous HSPCs may be administered at the peak of mobilization or after the peak of mobilization, before the depleted BM becomes repopulated by the endogenous HSPCs. These HSCT strategies may allow engraftment of ex vivo gene-modified HSPCs to therapeutically meaningful levels without raising serious toxicity concerns.

[0010] The inventors have shown that the exogenous HSPCs may have a competitive advantage as a result of their ex vivo culture and that this advantage can be enhanced by transient over-expression of engraftment enhancers such as CXCR4, CD47, ITGA4, and KIT. The inventors have shown that by using an optimized mRNA delivery platform, human HSPCs can be endowed with a transient engraftment advantage allowing them to outcompete the endogenous mobilized HSPCs for engraftment in depleted BM niches, thereby establishing stable long-term grafts.

[0011] The inventors have demonstrated the therapeutic efficacy of these strategies in a model of Hyper IgM Syndrome and in human hematochimeric mice, showing their applicability and versatility when coupled to gene transfer and editing strategies.

[0012] In one aspect, the present invention provides a population of haematopoietic stem and/or progenitor cell (HSPCs) for use in a method of therapy, the method comprising the steps of:

[0013] (a) administering one or more HSPC mobiliser to a subject to mobilise endogenous HSPCs from the subject's bone marrow; and

[0014] (b) administering the population of HSPCs to the subject.

[0015] In one aspect, the present invention provides a method for haematopoietic stem and/or progenitor cell (HSPC) transplantation in a subject in need thereof, comprising the steps:

[0016] (a) administering one or more HSPC mobiliser to the subject to mobilise the subject's endogenous HSPCs; and

[0017] (b) administering a population of HSPCs to the subject.

[0018] The population of HSPCs may be administered at or after the peak of mobilisation. In some embodiments, the population of HSPCs is administered at the peak of mobilisation. In some embodiments, the population of HSPCs is administered within about 9 hours, within about 6 hours, or within about 3 hours after step (a). In some embodiments, the population of HSPCs is administered about 2-4 hours or

about 3 hours after step (a). In other embodiments, the population of HSPCs is administered concurrently with step (a).

[0019] Any suitable mobilisation regimen may be used. In some embodiments, the one or more HPSC mobiliser is selected from a granulocyte colony-stimulating factor (G-CSF), a CXCR4 antagonist and a VLA-4 antagonist, or any combination thereof. In some embodiments: (i) the subject is administered a G-CSF for at least about 5 days before the population of HSPCs is administered; (ii) the subject is administered a CXCR4 antagonist for at least about 1 day before the population of HSPCs is administered; and/or (iii) the subject is administered a VLA-4 antagonist for at least about 1 day before the population of HSPCs is administered. In some embodiments: (i) the subject is administered a G-CSF for about 7 days before the population of HSPCs is administered; (ii) the subject is administered a CXCR4 antagonist for about 2 days before the population of HSPCs is administered; and (iii) optionally, the subject is administered a VLA-4 antagonist for about 2 days before the population of HSPCs is administered.

[0020] In some embodiments, the method further comprises a step of harvesting the mobilized endogenous HSPCs prior to administration of the population of HSPCs.

[0021] Any suitable population of HSPCs may be administered. The population of HSPCs may be autologous HSPCs and/or allogenic HSPCs. In some embodiments, the population of HSPCs are autologous HSPCs. In some embodiments, the population of HSPCs is cultured ex vivo prior to administration. In some embodiments, the method further comprises a step of genetically engineering the population of HSPCs, prior to administering the population of HSPCs. In some embodiments, the population of HSPCs are genetically engineered to express a transgene, gene-edited, and/or gene-corrected.

[0022] The population of HSPCs may be genetically engineered to express one or more engraftment enhancer. In some embodiments, the one or more engraftment enhancer is expressed transiently. In some embodiments, the one or more engraftment enhancer are each expressed from an RNA polynucleotide comprising a protein-coding sequence encoding the engraftment enhancer. In some embodiments, the RNA is delivered to the population of HSPCs by electroporation or by lipid-mediated transfection. In some embodiments: (a) the protein-coding sequence is operably linked to a translation non-blocking eIF4G aptamer; (b) the protein-coding sequence is operably linked to a woodchuck hepatitis virus post-transcriptional regulatory element (WPRE); (c) the protein-coding sequence is operably linked to a polyA tail, wherein the polyA tail is at least about 100, at least about 110, at least about 120, at least about 130, at least about 140, or at least about 150 nucleotides in length; (d) the RNA polynucleotide is 5' capped mRNA, wherein the 5' cap is m7G(5')ppp(5')(2'OMeA)pG; and/or (e) the RNA polynucleotide comprises modified uridine, preferably pseudouridine.

[0023] Any suitable engraftment enhancer may be used. In some embodiments, the one or more engraftment enhancer is selected from C-X-C chemokine receptor type 4 (CXCR4) or a fragment or variant thereof, CD47 or a fragment or variant thereof, integrin alpha-4 (ITGA4) or a fragment or variant thereof, and tyrosine-protein kinase KIT (KIT) or a fragment or variant thereof, or any combination thereof. In some embodiments, the one or more engraftment enhancer

comprises two or more, three or more, or four or more engraftment enhancers selected from: CXCR4 or a fragment or variant thereof, CD47 or a fragment or variant thereof, ITGA4 or a fragment or variant thereof, and KIT or a fragment or variant thereof.

[0024] In some embodiments, the population of HSPCs are genetically engineered to transiently express CXCR4 or a fragment or variant thereof. In some embodiments, the CXCR4 or a fragment or variant thereof comprises or consists of an amino acid sequence having at least 70% identity to any of SEQ ID NOs: 1-9. In some embodiments, the CXCR4 or a fragment or variant thereof comprises or consists of the amino acid sequence of SEQ ID NO: 2. In some embodiments, the CXCR4 or a fragment or variant thereof comprises or consists of the amino acid sequence of any of SEQ ID NOs: 3-9. In some embodiments, the CXCR4 or a fragment or variant thereof comprises or consists of the amino acid sequence of any of SEQ ID NOs: 6-9. In some embodiments, the CXCR4 variant has increased resistance to a CXCR4 antagonist and/or has maintained or increased response to SDF-1 compared to CXCR4.

[0025] In some embodiments, the population of HSPCs are genetically engineered to transiently express CD47 or a fragment or variant thereof. In some embodiments, the CD47 or a fragment or variant thereof comprises or consists of an amino acid sequence having at least 70% identity to any of SEQ ID NOs: 23-26. In some embodiments, the CD47 variant has maintained or increased response to its natural ligands compared to CD47.

[0026] In some embodiments, the population of HSPCs are genetically engineered to transiently express ITGA4 or a fragment or variant thereof. In some embodiments, the ITGA4 or a fragment or variant thereof comprises or consists of an amino acid sequence having at least 70% identity to SEQ ID NO: 29. In some embodiments, the ITGA4 variant has increased resistance to a VLA-4 antagonist and/or has maintained or increased response to its natural ligands compared to ITGA4.

[0027] In some embodiments, the population of HSPCs are genetically engineered to transiently express KIT or a fragment or variant thereof. In some embodiments, the KIT or a fragment or variant thereof comprises or consists of an amino acid sequence having at least 70% identity to SEQ ID NO: 31. In some embodiments, the KIT variant has increased resistance to a KIT-directed antibody or immunotoxin and/or has maintained or increased response to SCF compared to KIT.

[0028] The subject may be any subject in need thereof. In preferred embodiments, the subject does not undergo chemotherapy or radiotherapy conditioning prior to administration of the HSPCs. In some embodiments, the subject has a primary immunodeficiency, a lysosomal storage disorder, a haemoglobinopathy, or cancer. In some embodiments, the subject has a primary immunodeficiency, such as human primary combined immunodeficiency Hyper IgM Syndrome 1 (HIGM-1).

[0029] The chimerism level of the population of HSPCs in the subject's bone marrow may reach a level of at least 10%, at least 15%, at least 20%, at least 25%, at least 30%, at least 35%, or at least 40%. The chimerism level of the population of HSPCs in the subject's bone marrow may be stable for at least 24 weeks.

[0030] In one aspect, the present invention provides the use of a C-X-C chemokine receptor type 4 (CXCR4) variant,

integrin alpha-4 (ITGA4), and/or tyrosine-protein kinase KIT (KIT), for increasing engraftment by haematopoietic stem and/or progenitor cells (HSPCs), wherein the CXCR4 variant comprises one or more amino acid substitution selected from: V160L, A175F, Q200A, D262N, and H281A. The HSPCs may be genetically engineered to express the CXCR4 variant, ITGA4, and/or KIT.

[0031] In one aspect, the present invention provides a method for increasing engraftment by haematopoietic stem and/or progenitor cells (HSPCs), wherein the method comprises the step of genetically engineering the HSPCs to express a CXCR4 variant, ITGA4, and/or KIT, wherein the CXCR4 variant comprises one or more amino acid substitution selected from: V160L, A175F, Q200A, D262N, and H281A.

[0032] In some embodiments, the CXCR4 variant, ITGA4, and/or KIT are expressed transiently or stably by the HSPCs. In some embodiments, the HSPCs are genetically engineered to transiently express the CXCR4 variant, ITGA4, and/or KIT. In some embodiments, the HSPCs are transduced or transfected with one or more vectors encoding the CXCR4 variant, ITGA4, and/or KIT, preferably wherein the one or more vectors are RNA vectors. In some embodiments, the HSPCs are genetically engineered to express two or more, three or more, or four or more of: the CXCR4 variant, ITGA4, KIT, CXCR4, and CD47.

[0033] In some embodiments, the CXCR4 variant comprises one or more amino acid substitution selected from: A175F, Q200A, D262N, and H281A. In some embodiments, the CXCR4 variant comprises one or more amino acid substitution selected from: A175F, D262N or H281A. In some embodiments, the CXCR4 variant comprises one or more amino acid substitution selected from: A175F or D262N. In some embodiments, the CXCR4 variant comprises the amino acid substitution A175F. In some embodiments, the CXCR4 variant comprises the amino acid substitution Q200A. In some embodiments, the CXCR4 variant comprises the amino acid substitution D262N. In some embodiments, the CXCR4 variant comprises the amino acid substitution H281A.

[0034] In some embodiments, the CXCR4 variant comprises or consists of the amino acid sequence of any of SEQ ID NOs: 3-9. In some embodiments, the CXCR4 variant comprises or consists of the amino acid sequence of any of SEQ ID NOs: 6-9.

[0035] In one aspect, the present invention provides population of genetically engineered haematopoietic stem and/or progenitor cells (HSPCs) obtainable by the method of the present invention.

[0036] In one aspect, the present invention provides a population of genetically engineered haematopoietic stem and/or progenitor cells (HSPCs), wherein the HSPCs are genetically engineered to express a CXCR4 variant, ITGA4, and/or KIT, preferably wherein the HSPCs are genetically engineered to transiently express a CXCR4 variant, ITGA4, and/or KIT, wherein the CXCR4 variant comprises one or more amino acid substitution selected from: V160L, A175F, Q200A, D262N, and H281A. In some embodiments, the CXCR4 variant comprises one or more amino acid substitution selected from: A175F, Q200A, D262N, and H281A.

[0037] In some embodiments, the HSPCs are genetically engineered to express two or more, three or more, or four or more of: the CXCR4 variant, ITGA4, KIT, CXCR4, and CD47, preferably wherein the HSPCs are genetically engi-

neered to transiently express two or more, three or more, or four or more of: the CXCR4 variant, ITGA4, KIT, CXCR4, and CD47.

[0038] In one aspect, the present invention provides a pharmaceutical composition comprising the population of genetically engineered haematopoietic stem and/or progenitor cells (HSPCs) of the present invention and a pharmaceutically acceptable carrier, diluent or excipient.

[0039] In one aspect, the present invention provides a population of genetically engineered haematopoietic stem and/or progenitor cells (HSPCs) according to the present invention for use in therapy.

[0040] In one aspect, the present invention provides a population of genetically engineered haematopoietic stem and/or progenitor cells (HSPCs) according to the present invention for use in the treatment or prevention of cancer, an immune disorder, a lysosomal storage disorder, a bacterial or viral infection, a genetic disease, or a hemoglobinopathy.

[0041] In one aspect, the present invention provides a method for haematopoietic stem and/or progenitor cell (HSPC) transplantation, comprising the steps:

[0042] (a) providing a population of HSPCs which are genetically engineered to express a CXCR4 variant, ITGA4, and/or KIT, wherein the CXCR4 variant comprises one or more amino acid substitution selected from: V160L, A175F, Q200A, D262N, and H281A, preferably wherein the CXCR4 variant comprises one or more amino acid substitution selected from: A175F, Q200A, D262N, and H281A; and

[0043] (b) administering the HSPCs to a subject.

[0044] In one aspect, the present invention provides a method of treating or preventing cancer, an immune disorder, a lysosomal storage disorder, a bacterial or viral infection, a genetic disease, or a hemoglobinopathy, comprising the steps:

[0045] (a) providing a population of haematopoietic stem and/or progenitor cells (HSPCs) which are genetically engineered to express a CXCR4 variant, ITGA4, and/or KIT, wherein the CXCR4 variant comprises one or more amino acid substitution selected from: V160L, A175F, Q200A, D262N, and H281A, preferably wherein the CXCR4 variant comprises one or more amino acid substitution selected from: A175F, Q200A, D262N, and H281A; and

[0046] (b) administering the HSPCs to a subject.

[0047] The subject may be any subject in need thereof. In some embodiments, the subject is subjected to a mild myeloablative, reduced intensity or non-myeloablative conditioning regimen before administration of the HSPCs. In some embodiments the subject: (a) is subjected to a regimen for mobilisation of endogenous HSPCs; or (b) is subjected to conditioning with one or more HSPC-specific immunotoxins. In some embodiments, the subject does not undergo chemotherapy or radiotherapy conditioning before administration of the HSPCs.

[0048] In preferred embodiments, the subject is subjected to a regimen for mobilisation of endogenous HSPCs. The population of HSPCs may be administered at or after the peak of mobilisation. In some embodiments, the population of HSPCs is administered at the peak of mobilisation. In some embodiments, the population of HSPCs is administered within about 9 hours, within about 6 hours, or within about 3 hours after the regimen for mobilisation of endogenous HSPCs is completed. In some embodiments, the

population of HSPCs is administered about 2-4 hours or about 3 hours after the regimen for mobilisation of endogenous HSPCs is completed. In some embodiments, the population of HSPCs is administered concurrently with the regimen for mobilisation of endogenous HSPCs.

[0049] Any suitable regimen may be used for mobilisation. In some embodiments, the regimen for mobilisation of endogenous HSPCs comprises administering one or more HPSC mobiliser selected from a granulocyte colony-stimulating factor (G-CSF), a CXCR4 antagonist and a VLA-4 antagonist, or any combination thereof. In some embodiments, the regimen for mobilisation of endogenous HSPCs comprises: (i) administering a G-CSF for at least about 5 days; (ii) administering a CXCR4 antagonist for at least about 1 day; and/or (iii) administering a VLA-4 antagonist for at least about 1 day. In some embodiments, the regimen for mobilisation of endogenous HSPCs comprises: (i) administering a G-CSF for about 7 days; (ii) administering a CXCR4 antagonist for about 2 days; and (iii) administering a VLA-4 antagonist for about 2 days.

[0050] In some embodiments, the regimen for mobilisation of endogenous HSPCs is followed by a step of harvesting the mobilized endogenous HSPCs prior to administration of the population of HSPCs.

[0051] In one aspect, the present invention provides an RNA polynucleotide comprising a protein-coding sequence. In some embodiments, the RNA polynucleotide comprises from 5' to 3': a m7G(5')ppp(5')(2'OMeA)pG cap; a translation non-blocking eIF4F aptamer; a Kozak sequence; a protein-coding sequence; a WPRE; and a polyA tail comprising at least about 100 nucleotides.

[0052] The protein-coding sequence may be operably linked to a Kozak sequence.

[0053] The protein-coding sequence may be operably linked to a translation non-blocking eIF4F aptamer. In some embodiments, the translation non-blocking eIF4F aptamer is a translation non-blocking eIF4G aptamer. In some embodiments, the translation non-blocking eIF4F aptamer comprises or consists of a nucleotide sequence having at least 90% identity to any of SEQ ID NOs: 33-36. In some embodiments, the translation non-blocking eIF4F aptamer comprises or consists of a nucleotide sequence having at least 90% identity to SEQ ID NO: 34.

[0054] The protein-coding sequence may be operably linked to a woodchuck hepatitis virus post-transcriptional regulatory element (WPRE). In some embodiments, the WPRE comprises or consists of a nucleotide sequence having at least 70% identity to SEQ ID NO: 37.

[0055] The protein-coding sequence may be operably linked to a polyA tail. In some embodiments, the polyA tail is at least about 100, at least about 110, at least about 120, at least about 130, at least about 140, or at least about 150 nucleotides in length.

[0056] The RNA polynucleotide may be a 5' capped mRNA. In some embodiments, the 5' cap is m7G(5')ppp(5')(2'OMeA)pG.

[0057] The RNA polynucleotide may comprise modified uridine. In some embodiments, the RNA polynucleotide comprises pseudouridine.

[0058] In preferred embodiments, the transgene is an engraftment enhancer. Any suitable engraftment enhancer may be used. In some embodiments, the engraftment enhancer is selected from CXCR4 or a fragment or variant thereof, CD47 or a fragment or variant thereof, ITGA4 or a fragment or variant thereof, and KIT or a fragment or variant thereof.

thereof, CD47 or a fragment or variant thereof, ITGA4 or a fragment or variant thereof, and KIT or a fragment or variant thereof.

[0059] In some embodiments, the engraftment enhancer is CXCR4 or a fragment or variant thereof. In some embodiments, the CXCR4 or a fragment or variant thereof comprises or consists of an amino acid sequence having at least 70% identity to any of SEQ ID NOs: 1-9, preferably wherein the CXCR4 or a fragment or variant thereof comprises or consists of the amino acid sequence of any of SEQ ID NOs: 3-9, more preferably wherein the CXCR4 or a fragment or variant thereof comprises or consists of the amino acid sequence of any of SEQ ID NOs: 6-9. In some embodiments, the protein-coding sequence comprises or consists of a nucleotide sequence having at least 70% identity to any of SEQ ID NOs: 10-22, preferably wherein the protein-coding sequence comprises or consists of the nucleotide sequence of any of SEQ ID NOs: 19-22.

[0060] In some embodiments, the engraftment enhancer is CD47 or a fragment or variant thereof. In some embodiments, the CD47 or a fragment or variant thereof comprises or consists of an amino acid sequence having at least 70% identity to any of SEQ ID NOs: 23-26. In some embodiments, the protein-coding sequence comprises or consists of a nucleotide sequence having at least 70% identity to SEQ ID NO: 27 or 28.

[0061] In some embodiments, the engraftment enhancer is ITGA4 or a fragment or variant thereof. In some embodiments, the ITGA4 or a fragment or variant thereof comprises or consists of an amino acid sequence having at least 70% identity to SEQ ID NO: 29. In some embodiments, the protein-coding sequence comprises or consists of a nucleotide sequence having at least 70% identity to SEQ ID NO: 30.

[0062] In some embodiments, the engraftment enhancer is KIT or a fragment or variant thereof. In some embodiments, the KIT or a fragment or variant thereof comprises or consists of an amino acid sequence having at least 70% identity to SEQ ID NO: 31. In some embodiments, the protein-coding sequence comprises or consists of a nucleotide sequence having at least 70% identity to SEQ ID NO: 32.

[0063] In one aspect, the present invention provides a DNA polynucleotide encoding the RNA polynucleotide according to the present invention.

[0064] In one aspect, the present invention provides a vector comprising the DNA polynucleotide according to the present invention.

[0065] In one aspect, the present invention provides an isolated cell comprising the RNA polynucleotide according to the present invention, the DNA polynucleotide according to the present invention, or the vector according to the present invention.

[0066] In one aspect, the present invention provides a method for the production of the RNA polynucleotide according to the present invention, comprising the step of in vitro transcribing the DNA polynucleotide according to the present invention. In some embodiments, the method comprises transcribing the DNA with modified uridine, preferably pseudouridine. In some embodiments, the method comprises capping the RNA polynucleotide with m7G(5')ppp(5')(2'OMeA)pG. In some embodiments, the method comprise purifying the RNA polynucleotide.

[0067] In one aspect, the present invention provides a method for delivering the RNA polynucleotide according to the present invention, wherein the RNA polynucleotide is delivered to a population of HSPCs by electroporation or by lipid-mediated transfection.

[0068] In one aspect, the present invention provides the use of the RNA polynucleotide according to the present invention for increasing engraftment by haematopoietic stem and/or progenitor cells (HSPCs).

[0069] In one aspect, the present invention provides a method for increasing engraftment by haematopoietic stem and/or progenitor cells (HSPCs), wherein the method comprises the step of transfecting the RNA polynucleotide according to the present invention into the HSPCs.

[0070] In one aspect, the present invention provides an isolated haematopoietic stem and/or progenitor cell (HSPC) comprising the RNA polynucleotide according to the present invention.

[0071] In one aspect, the present invention provides a population of isolated haematopoietic stem and/or progenitor cells (HSPCs) according to the present invention.

[0072] In one aspect, the present invention provides a pharmaceutical composition comprising the isolated HSPC of the present invention, or a population of HSPCs of the present invention, and a pharmaceutically acceptable carrier, diluent or excipient.

[0073] In one aspect, the present invention provides an isolated HSPC according to the present invention, or a population of HSPCs according to the present invention, for use in therapy.

[0074] In one aspect, the present invention provides an isolated HSPC according to the present invention, or a population of HSPCs according to the present invention, for use in the treatment or prevention of cancer, an immune disorder, a lysosomal storage disorder, a bacterial or viral infection, a genetic disease, or a hemoglobinopathy.

[0075] In one aspect, the present invention provides a method for haematopoietic stem and/or progenitor cell (HSPC) transplantation, comprising the steps:

[0076] (a) providing a population of HSPCs comprising the RNA polynucleotide according to the present invention; and

[0077] (b) administering the HSPCs to a subject.

[0078] In one aspect, the present invention provides a method of treating or preventing cancer, an immune disorder, a lysosomal storage disorder, a bacterial or viral infection, a genetic disease, or a hemoglobinopathy, comprising the steps:

[0079] (a) providing a population of HSPCs comprising the RNA polynucleotide according to the present invention; and

[0080] (b) administering the HSPCs to a subject.

DESCRIPTION OF DRAWINGS

[0081] FIG. 1. Long-term donor chimerism is established by mobilization-based HSCT (M-HSCT)

[0082] (A) Schematic of the M-HSCT protocol. Recipient CD45.2 mice were mobilized with G-CSF (green dots) and AMD3100 (red triangle), with and without BIO5192 (blue triangle) (G7A; G7AB), and subsequently transplanted with CD45.1 2×10^6 Lin⁻ cells, collected from the BM.

[0083] (B) Counts of mobilized WBC (left panel), LSK (middle panel) and SLAM HSC (right panel) per mL in

the PB in non-mobilized (Sham) and G7A and G7AB mobilized mice. Kruskal-Wallis test, followed by post hoc analysis with Dunn's test.

[0084] (C) Counts of LSK cells per million of Lin⁻ CD45.1 donor cells, collected from the BM.

[0085] (D) Long-term follow-up of the donor CD45.1 (blue) and recipient CD45.2 (ochre) chimerism observed within total CD45+ cells in PB after transplanting 2×10^6 Lin⁻ cells post-mobilization in recipient CD45.2 mice. Longitudinal comparisons, performed by mixed-effects model (REML), followed by post hoc analysis with Tukey's test (between groups) or by post hoc analysis with Dunnett's test (within groups).

[0086] (E) Reconstitution of myeloid and lymphoid lineages overtime of the recipient CD45.2+ cells (left panel) and CD45.1+ cells (right panel) in PB of recipient CD45.2 mice. Comparison of lineages between CD45.1 and CD45.2 cells performed at the last time point by mixed-effects model (REML), followed by post hoc analysis with Dunnett's test.

[0087] (F-I) Chimerism of CD45.1 cells observed within CD19+ B cells, CD11b+ myeloid cells, CD4+ T helper cells and CD8+ T cytotoxic cells in PB (F), BM (G), within Lin⁻, LSK and SLAM HSC (H) and spleen (I). Mixed-effects model (REML), followed by post hoc analysis with Tukey's test (between groups) or by post hoc analysis with Dunnett's test (within groups).

[0088] (J-K) Myeloid and lymphoid lineage composition of CD45.2+ cells (left panel) and CD45.1+ cells (right panel) in the BM (J) and spleen (K) of CD45.2 mice. Comparison of lineages between CD45.1 and CD45.2 cells, performed by mixed-effects model (REML), followed by post hoc analysis with Dunnett's test.

[0089] Results are mean $\pm$ SEM, with $n \geq 10$. P-values were defined as such (*P<0.05, **P<0.01, ***P<0.001, ****P<0.0001. "ns" means non-significance).

[0090] FIG. 2. M-HSCT allows establishing sufficient donor chimerism to rescue the HIGM1 phenotype

[0091] (A) Schematic of different mobilization protocols tested and the times of analysis in Cd40lg^{-/-} mice.

[0092] (B-D) Counts of mobilized WBC (B), LSK (C) and SLAM HSC (D) per mL in the PB of Cd40lg^{-/-} mice treated with PBS (Sham), G-CSF for 7 days (G7), G-CSF for 7 days and AMD3100 (G7A), G-CSF for 7 days, AMD3100 and BIO5192 (G7AB), half-dose of G-CSF for 7 days, AMD3100 and BIO5192 (G7AB-H), G-CSF for 5 days and AMD3100 (G5A), G-CSF for 5 days, AMD3100 and BIO5192 (G5AB), G-CSF for 3 days, AMD3100 and BIO5192 (G3AB), half-dose of G-CSF for 3 days, AMD3100 and BIO5192 (G3AB-H) and only AMD3100 and BIO5192 (AB) at 0, 1, 3, 6 and 9 hours after the last injection of A or AB. Kruskal-Wallis test performed for the 3-hour timepoint, followed by post hoc analysis with Dunn's test.

[0093] (E-F) MMP9 (E) and CXCL12 (F) concentration in the BM extracellular extracts of Cd40lg^{-/-} mice mobilized with protocols described above.

[0094] (G) Total counts of SLAM HSC in the lower limbs (left panel) and in the PB per mL (right panel) of Cd40lg^{-/-} mice treated with PBS or mobilized with G7AB. Mann-Whitney test performed.

[0095] (H) Long-term follow-up of the donor WT (blue) and recipient Cd40lg^{-/-} (ochre) chimerism observed

- within total CD45⁺ cells in PB after transplanting 2×10^6 Lin⁻ cells (collected from the BM) post-mobilization in recipient Cd40Ig^{-/-} mice. Longitudinal comparisons, performed by mixed-effects model (REML), followed by post hoc analysis with Sidak's test or by post hoc analysis with Dunnett's test (within groups).
- [0096]** (I-K) Myeloid and lymphoid lineage composition of Cd40Ig^{-/-} (left panel) and WT (right panel) cells in the PB (I), BM (J) and spleen (K) of Cd40Ig^{-/-} mice after M-HSCT. Comparison of lineages between WT and Cd40Ig^{-/-} cells performed by mixed-effects model (REML), followed by post hoc analysis with Dunnett's.
- [0097]** (L) TNP-KLH-specific IgG concentration in sera collected 7 days before (pre) and after (post) TNP-KLH vaccination of Cd40Ig^{-/-} mice after M-HSCT. Mixed-effects model (REML), followed by post hoc analysis with Tukey's test.
- [0098]** (M) Percentage of PNA⁺GL7⁺ splenic germinal centers B cells within the spleen of Cd40Ig^{-/-} mice after TNP-KLH vaccination of Cd40Ig^{-/-} mice treated by M-HSCT. Kruskal-Wallis test, followed by post hoc analysis with Dunn's test.
- [0099]** Results are mean $\pm$ SEM, with $n \geq 5$ for the kinetic experiments, except for the AB group ($n=4$), and with $n \geq 9$ for the Cd40Ig^{-/-} M-HSCT experiments. P-values were defined as such (* $P < 0.05$, ** $P < 0.01$, *** $P < 0.001$, **** $P < 0.0001$. "ns" means non-significance).
- [0100]** FIG. 3. M-HSCT allows efficient donor to recipient exchange of HSPCs within the human niche of hematohimic mice
- [0101]** (A) Percentage of human chimerism (CD45⁺; left panel) and lymphoid/myeloid cell composition within human CD45⁺ population (right panel) overtime in NSGW41 mice, following the first transplant of human CD34⁺ cells.
- [0102]** (B) Counts of mobilized WBC (left panel), LSK cells (middle panel) and human CD34⁺CD38⁻ cells (right panel) per mL in the PB of humanized NSGW41 mice non-mobilized or mobilized with G7AB at 0, 1, 3 and 6 hours after the last injection of AMD3100 and BIO5192. Kruskal-Wallis test, followed by post hoc analysis with Dunn's test.
- [0103]** (C) Total counts of CD34⁺CD38⁻ cells in the lower limbs (left panel) and the PB per mL (right panel) of humanized NSGW41 mice non-mobilized (Sham) or mobilized (G7AB). Mann-Whitney test performed.
- [0104]** (D) Schematic illustration of competitive transplantation, after G7AB mobilization, between human resident cells (initially transplanted with 3×10^5 CD34⁺ G-CSF mPB cells, counted on day 1 post-thawing; d1 p.t.) and newly transplanted CD34⁺G-CSF mPB GFP-transduced cells (outgrowth of 1×10^5 CD34⁺ cells, counted on d1 p.t., transplanted on d3 p.t.) in NSGW41 mice.
- [0105]** (E) Vector copy number (VCN) in HSPCs population (CD34⁺ CD133⁺ CD90⁺) (left panel) and percentage of GFP⁺ cells measured within CD34⁺ cells (right panel), in vitro, after transduction.
- [0106]** (F) CXCR4^{high} MFI overtime after thawing, stained with an antibody targeting the N-terminus epitope of CXCR4, on HSPC population (CD34⁺ CD133⁺ CD90⁺) mobilized with G-CSF.
- [0107]** (G-H) Long-term follow-up of human CD45⁺ (G) and GFP⁺/CD45⁺ (H) cells chimerism in PB after M-HSCT in NSGW41 mice. Mann-Whitney test performed.
- [0108]** (I) Chimerism of GFP⁺ cells observed within CD19⁺, CD13⁺ and CD3⁺ cells at the end of the experiment in PB after M-HSCT. Mixed-effects model (REML), followed by post hoc analysis with Sidak's test (between groups) or by post hoc analysis with Dunnett's test (within groups).
- [0109]** (J) Reconstitution of myeloid and lymphoid lineages overtime of human CD45⁺ (left panel) and CD45⁺/GFP⁺ cells (right panel) in PB after M-HSCT. Comparison of lineages between human CD45⁺ and GFP⁺ cells performed at the last time point by mixed-effects model (REML), followed by post hoc analysis with Dunnett's test (within groups).
- [0110]** (K-L) Human CD45⁺ (K) and GFP⁺/CD45⁺ (L) cells chimerism in BM, spleen and thymus after M-HSCT. Mixed-effects model (REML), followed by post hoc analysis with Sidak's test.
- [0111]** (M) Myeloid and lymphoid lineage composition of human CD45⁺ cells (left panel) and CD45⁺/GFP⁺ cells (right panel) in the spleen of NSGW41 mice after M-HSCT. Comparison of lineages between human CD45⁺ and CD45⁺/GFP⁺ cells by mixed-effects model (REML), followed by post hoc analysis with Dunnett's test (within groups).
- [0112]** (N) Chimerism of GFP⁺ cells observed within CD19⁺, CD13⁺ and CD3⁺ cells in the spleen after M-HSCT. Mixed-effects model (REML), followed by post hoc analysis with Sidak's test (between groups) or by post hoc analysis with Dunnett's test (within groups).
- [0113]** (O) Percentage of T cells within human CD45⁺ (left panel) and CD45⁺/GFP⁺ cells (right panel) in the thymus after M-HSCT. Kruskal-Wallis test was performed, followed by post hoc analysis with Dunn's test.
- [0114]** (P) Chimerism of GFP⁺ cells observed within T cells in thymus after M-HSCT. Mann-Whitney test performed.
- [0115]** (Q) Myeloid and lymphoid lineage composition of human CD45⁺ (left panel) and CD45⁺/GFP⁺ cells (right panel) in the BM of NSGW41 mice after M-HSCT. Comparison of lineages between human CD45⁺ and CD45⁺/GFP⁺ cells performed by mixed-effects model (REML), followed by post hoc analysis with Dunnett's test (within groups).
- [0116]** (R) Chimerism of GFP⁺ cells observed within CD19⁺, CD13⁺ and CD3⁺ cells in BM after M-HSCT. Mixed-effects model (REML), followed by post hoc analysis with Sidak's test (between groups) or by post hoc analysis with Dunnett's test (within groups).
- [0117]** (S) Percentage of HSPCs (CD34⁺ CD38⁻ CD90⁺) in human CD45⁺ (left panel) and CD45⁺/GFP⁺ cells (right panel) in the BM after M-HSCT. Kruskal-Wallis test was performed, followed by post hoc analysis with Dunn's test.
- [0118]** (T) Chimerism of GFP⁺ cells observed within HSPCs in BM after M-HSCT. Mann-Whitney test performed.
- [0119]** Results are mean $\pm$ SEM, with $n \geq 9$. P-values were defined as such (* $P < 0.05$, ** $P < 0.01$, *** $P < 0.001$, **** $P < 0.0001$. "ns" means non-significance).

[0120] FIG. 4. Transient overexpression of CXCR4 increases chimerism in the humanized context, following M-HSCT

[0121] (A-B) Fold change of CXCR4^{high} cells (A) and CXCR4^{high} MFI (B) in bulk CD34⁺ cells, electroporated with CXCR4 mRNA (pVAX) or optimized CXCR4 mRNA (pVAXi), normalized to electroporated-only (EO) cells.

[0122] (C-D) Fold change of CXCR4^{high} cells (C) and CXCR4^{high} MFI (D) in CD34⁺ CD133⁺ CD90⁺ HSPCs, electroporated with CXCR4 mRNA or optimized CXCR4 mRNA, normalized to (electroporated only) EO cells.

[0123] Mixed-effects model (REML), followed by post hoc analysis with Sidak's test (A-D).

[0124] (E-F) Percentage of migrating bulk CD34⁺ cells (E) and HSPCs (F), electroporated with GFP, CXCR4 or optimized CXCR4 mRNA. Kruskal-Wallis test was performed, followed by post hoc analysis with Dunn's test.

[0125] (G-H) Fold change of CXCR4^{high} cells (G) and CXCR4^{high} MFI (H) in HSPCs, electroporated with CXCR4 isoform1 or isoform2 mRNA, normalized to EO cells.

[0126] (I) Percentage of migrating HSPCs, electroporated with GFP, CXCR4 isoform1 or isoform2 mRNA. Kruskal-Wallis test was performed, followed by post hoc analysis with Dunn's test.

[0127] (J) Long-term follow-up of human CD45⁺ in PB of NSG mice, following the transplantation of CD34⁺ cells electroporated with GFP or CXCR4 mRNA. Longitudinal comparisons, performed by mixed-effects model (REML), followed by post hoc analysis with Sidak's test.

[0128] (K) Reconstitution of myeloid and lymphoid lineages overtime within total CD45⁺ cells in PB of NSG mice, transplanted with CD34⁺ cells electroporated with GFP or CXCR4 mRNA. Comparison of lineages between human CD45⁺ and GFP⁺ cells performed at the last time point by mixed-effects model (REML), followed by post hoc analysis with Dunnett's test (within groups).

[0129] (L) Myeloid and lymphoid cell composition of human CD45⁺ cells in the BM of NSG mice, transplanted with CD34⁺ cells electroporated with GFP or CXCR4 mRNA. Comparison of lineages between human CD45⁺ cells by mixed-effects model (REML), followed by post hoc analysis with Dunnett's test (within groups).

[0130] (M) CD34⁺ subpopulation in the BM of NSG mice, transplanted with CD34⁺ cells electroporated with GFP or CXCR4 mRNA. Mixed-effects model (REML), followed by post hoc analysis with Sidak's test.

[0131] (N) Schematic illustration of competitive transplantation, after G7AB mobilization, between human resident cells (initially transplanted with 3×10⁵ CD34⁺ G-CSF mPB cells, counted on d1 p.t.) and newly transplanted CD34⁺ G-CSF mPB GFP-transduced and electroporated cells (outgrowth of 2×10⁵ CD34⁺ cells, counted on d1 p.t., transplanted on d3 p.t.) in NSGW41 mice.

[0132] (O-P) Long-term follow-up of human CD45⁺ (O) and CD45⁺/GFP⁺ (P) cells in PB after M-HSCT

with CD34⁺ cells transiently overexpressing GFP or CXCR4 mRNA, in NSGW41 mice. Two-way ANOVA followed by post hoc analysis with Tukey's test.

[0133] (Q) Counts of GFP⁺ cells per mL in the PB after M-HSCT with CD34⁺ cells transiently overexpressing GFP or CXCR4 mRNA, in NSGW41 mice. Two-way ANOVA followed by post hoc analysis with Tukey's test.

[0134] (R) Myeloid and lymphoid lineage composition of human CD45⁺ (left panel) and CD45⁺/GFP⁺ cells (right panel) in the PB after M-HSCT, with CD34⁺ cells transiently overexpressing GFP or CXCR4, in NSGW41 mice. Comparison of lineages between human CD45⁺ and CD45⁺/GFP⁺ cells performed by mixed-effects model (REML), followed by post hoc analysis with Dunnett's test (within groups).

[0135] (S) Chimerism of GFP⁺ cells observed within CD19⁺, CD13⁺ and CD3⁺ cells in PB after M-HSCT, with CD34⁺ cells transiently overexpressing GFP or CXCR4, in NSGW41 mice. Mixed-effects model (REML), followed by post hoc analysis with Tukey's test (between groups) or by post hoc analysis with Dunnett's test (within groups).

[0136] (T) Percentage of human CD45⁺ cells in PB of NSG mice at 16 weeks, following secondary transplant of cells collected from groups described in FIG. 4O. Two-way ANOVA followed by post hoc analysis with Tukey's test.

[0137] (U) Percentage of human CD45⁺/GFP⁺ cells in PB of NSG mice at 16 weeks, following secondary transplant of cells collected from groups described in FIG. 4O. Two-way ANOVA followed by post hoc analysis with Tukey's test.

[0138] Results are mean±SEM, with n ≥10 for data collected in vivo, n ≥4 for secondary transplant experiments, and n ≥5 for data collected in vitro (3 different donors). P-values were defined as such (*P<0.05, **P<0.01, ***P<0.001, ****P<0.0001. "ns" means non-significance).

[0139] FIG. 5. M-HSCT confers significant advantage to gene edited cells when paired with an engraftment enhancer

[0140] (A-B) Percentage of CXCR4⁺ cells in HSPCs (CD34⁺ CD133⁺ CD90⁺) (A) and of migrating HSPCs (B), following gene editing (GE; Cas9 RNA, AAVS1 sgRNA, AAV6-GFP) combined or not with GFP (GE GFP) or CXCR4 (GE CXCR4) mRNA. Kruskal-Wallis test, followed by post hoc analysis with Dunn's test.

[0141] (C-D) Long-term follow-up of human CD45⁺ (C) and CD45⁺/GFP⁺ (D) cells in PB after M-HSCT (as in FIG. 3D) with CD34⁺ cells gene edited as in A, in NSGW41 mice. Mixed-effects model (REML), followed by post hoc analysis with Tukey's test.

[0142] (E-G) Percentage of migrating HSPCs without treatment (E), in presence of AMD3100 (F) or AMD3465 (G), electroporated with CXCR4 variants. Kruskal-Wallis test, followed by post hoc analysis with Dunn's test.

[0143] (H) Percentage of human CD45⁺ in PB of NSG mice at 16 weeks, following the transplantation of CD34⁺ cells electroporated with GFP, ITGA4, KIT and CD47 mRNA. Kruskal-Wallis test, followed by post hoc analysis with Dunn's test.

[0144] Results are mean $\pm$ SEM, with $n \geq 8$ for data collected in vivo on NSGW41 mice, with $n \geq 5$ for data collected in vivo on NSG mice and $n \geq 5$ for data collected in vitro (3 different donors).

[0145] FIG. 6. Long-term donor chimerism is established by M-HSCT, related to FIG. 1

[0146] (A) Schematic of the M-HSCT strategy, illustrating the proposed exchange between mobilized recipient CD45.2 and donor CD45.1 cells.

[0147] (B) Schematic of the interaction between mobilization agents and their therapeutic targets within the BM microenvironment.

[0148] (C) Representative plots showing the gating strategy used to characterize LSK and SLAM HSC circulating in the peripheral blood, stained for Lineage markers, SCA1, KIT, CD48 and CD150.

[0149] (D) Representative plots showing the gating strategy used to characterize donor cells, extracted from the BM, stained for Lineage markers, SCA1, KIT, pre- and post-purification of Lineage negative cells.

[0150] FIG. 7. M-HSCT allows establishing sufficient donor chimerism to rescue the HIGM1 phenotype, related to FIG. 2

[0151] (A) Counts of mobilized WBC (left panel), LSK (middle panel) and SLAM HSC (right panel) cells per mL in the PB of Cd40lg^{-/-} mice and CD45.2 mice, after mobilization with PBS (Sham) or mobilized with G7AB. Mixed-effects model (REML), followed by post hoc analysis with Sidak's test.

[0152] (B) Percentage of neutrophils, lymphocytes, monocytes, eosinophils and basophils in the PB after different mobilization protocols.

[0153] (C-D) Counts of mobilized monocytes (C) and neutrophils (D) per mL in the PB after different mobilization protocols.

[0154] (E) Schematic of G-CSF impact on the BM.

[0155] (F) CXCR4 MFI on circulating LSK after treatments with PBS, G7A, G7AB and on donor cells purified from untreated bone marrow. Kruskal-Wallis test, followed by post hoc analysis with Dunn's test.

[0156] (G) Schematic of the M-HSCT protocol applied to Cd40lg^{-/-} mice. Recipient Cd40lg^{-/-} mice were mobilized with G-CSF (green dots), AMD3100 (red triangle) and BIO5192 (blue triangle) (G7AB), and subsequently transplanted with 2×10^6 WT CD45.1 Lin⁻ cells, collected from the BM.

[0157] (H-K) Chimerism of WT cells observed within CD19⁺, CD11b⁺, CD4⁺ and CD8⁺ cells in PB (H), spleen (I) and in BM (J) and within Lin⁻, LSK and SLAM HSC in BM (K). Mixed-effects model (REML), followed by post hoc analysis with Tukey's test (between groups) or by post hoc analysis with Dunnett's test (within groups).

[0158] (L) Chimerism of CD45.1 cells at 20 weeks, following different M-HSCT protocol, subsequently transplanted with 2×10^6 WT CD45.1 Lin⁻ cells, collected from the BM.

[0159] (M) Chimerism of CD45.1 cells at 20 weeks, following mobilization with G7AB and subsequently transplanted with different cell doses (WT CD45.1 Lin⁻ cells, collected from the BM).

[0160] Results are mean $\pm$ SEM, with $n \geq 5$ for the kinetic experiments, except for the AB group ($n=4$), and with $n \geq 9$ for the Cd40lg^{-/-} M-HSCT experiments.

[0161] FIG. 8. M-HSCT allows efficient donor to recipient exchange of HSPCs within the human niche of hematohimic mice, related to FIG. 3

[0162] (A) Representative plots showing the gating strategy used to characterize CXCR4^{high} population in HSPC (CD34⁺ CD133⁺ CD90⁺) population.

[0163] (B) Scheme of CXCR4 cleavage following G-CSF mobilization and related antibodies localization.

[0164] (C) Percentage of migrating HSPCs, performed at 24 hours and 72 hours post-thawing, previously collected with G-CSF. Kruskal-Wallis test was performed, followed by post hoc analysis with Dunn's test.

[0165] (D) Percentage of CXCR4^{high} cells (left panel) and MFI (right panel) overtime after thawing, stained with an antibody targeting the ECL2 epitope of CXCR4, on HSPC population mobilized with G-CSF or G-CSF/AMD3100.

[0166] (E) Percentage of CXCR4^{high} cells (left panel) and MFI (right panel) overtime after thawing, stained with an antibody targeting the N-terminus epitope of CXCR4, on HSPC population mobilized with G-CSF.

[0167] (F) Percentage of KIT⁺ cells (left panel) and MFI (right panel) overtime after thawing, on HSPC population mobilized with G-CSF or G-CSF/AMD3100.

[0168] (G) Percentage of ITGA4⁺ cells (left panel) and MFI (right panel) overtime after thawing, on HSPC population mobilized with G-CSF or G-CSF/AMD3100. Longitudinal comparisons, performed by mixed-effects model (REML), followed by post hoc analysis with Dunnett's test.

[0169] Results are mean $\pm$ SEM, with $n \geq 5$, with 3 different donors.

[0170] FIG. 9. Optimization of the mRNA delivery platform, related to FIG. 4

[0171] (A-D) Fold change of CXCR4^{high} cells (left panel) and CXCR4^{high} MFI (right panel) in HSPCs (CD34⁺ CD133⁺ CD90⁺) electroporated with CXCR4 mRNA differing for the 5'UTR sequence (A), the 3'UTR sequence (B), the polyA tail length (C) and the mRNA capping (D), normalized to EO cells.

[0172] (E) Fold change of CXCR4^{high} cells in HSPCs electroporated with CXCR4 mRNA differing for nucleotides used during mRNA synthesis, normalized to EO cells.

[0173] (F) Percentage of GFP⁺ cells in HSPCs, electroporated with GFP mRNA differing for nucleotides used for the mRNA synthesis, normalized to EO cells.

[0174] (G) Schematic of the pVAX CXCR4 mRNA and improved pVAXi CXCR4 mRNA.

[0175] (H) Fold change of IRF7, OAS1, RIG-I and ISG15 gene expression, in cells electroporated with CXCR4 mRNA differing for nucleotides used during mRNA synthesis, normalized to EO cells.

[0176] (I) Fold change of CXCR4^{high} cells (left panel) and CXCR4^{high} MFI (right panel) in HSPCs, electroporated with different quantities of CXCR4 mRNA, normalized to EO cells.

[0177] (J) Percentage of migrating HSPCs, electroporated with different quantities of CXCR4 mRNA.

[0178] (K) Early and late apoptosis (EA, LA) induced by the electroporation of different quantities of CXCR4 mRNA, in bulk CD34⁺ cells.

- [0179] (L) Percentage of HSPCs (CD34⁺ CD133⁺ CD90⁺) in CD34⁺ cells electroporated with different quantities of CXCR4 mRNA.
- [0180] Kruskal-Wallis test, followed by post hoc analysis with Dunn's test (G-K). Results are mean±SEM, with n ≥5 for data collected in vitro (3 different donors).
- [0181] FIG. 10. Transient overexpression of CXCR4 increases chimerism in the humanized context, following M-HSCT, related to FIG. 4
- [0182] (A-B) Myeloid and lymphoid cell composition of human CD45⁺ in the spleen (A) and thymus (B) of NSG mice, transplanted with CD34⁺ cells electroporated with GFP or CXCR4 mRNA. Comparison of lineages between human CD45⁺ and GFP⁺ cells by mixed-effects model (REML), followed by post hoc analysis with Dunnett's.
- [0183] (C, E, G) Myeloid and lymphoid lineage composition of human CD45⁺ (left panel) and CD45⁺/GFP⁺ cells (right panel) in the spleen (C), BM (E) and thymus (G) after M-HSCT (as in FIG. 3D) with CD34⁺ cells transiently overexpressing GFP or CXCR4 in NSGW41 mice. Comparison of lineages between human CD45⁺ and CD45⁺/GFP⁺ cells performed by mixed-effects model (REML), followed by post hoc analysis with Dunnett's.
- [0184] (D, F, H) Chimerism of GFP⁺ cells observed within CD19⁺, CD13⁺ and CD3⁺ cells in spleen (D), in BM (F) and within CD3⁺, CD4⁺, CD8⁺ T cells in thymus (H) after M-HSCT with CD34⁺ cells transiently overexpressing GFP or CXCR4 in NSGW41 mice. Mixed-effects model (REML), followed by post hoc analysis with Tukey's test (between groups) or by post hoc analysis with Dunnett's test (within groups).
- [0185] Results are mean±SEM, with n ≥10.
- [0186] FIG. 11. M-HSCT confers a significant advantage to gene edited cells when paired with an engraftment enhancer, related to FIG. 5
- [0187] (A) Schematic illustration of competitive transplantation, after G7AB mobilization, between human resident cells (initially transplanted with 3×10⁵ CD34⁺ G-CSF mPB cells, counted on d1 p.t.) and newly transplanted CD34⁺ G-CSF mPB gene-edited cells (outgrowth of 3×10⁵ CD34⁺ cells, counted on d1 p.t., transplanted on d4 p.t.) in NSGW41 mice.
- [0188] (B) HDR efficiency in edited cells (GFP⁺) on the bulk CD34⁺ population, assessed in vitro, 15 days post-electroporation.
- [0189] (C) Reconstitution of myeloid and lymphoid lineages overtime of human CD45⁺ (left panel) and CD45⁺/GFP⁺ cells (right panel) in PB after M-HSCT with CD34⁺ cells gene edited as in FIG. 5A, in NSGW41 mice. Comparison of lineages between human CD45⁺ and CD45⁺/GFP⁺ cells performed at the last time point by mixed-effects model (REML), followed by post hoc analysis with Dunnett's test (within groups).
- [0190] (D, E) Myeloid and lymphoid lineage composition of human CD45⁺ (left panel) and CD45⁺/GFP⁺ cells (right panel) in the spleen (D) and BM (E) after M-HSCT with CD34⁺ cells gene edited as in FIG. 5A, in NSGW41 mice. Comparison of lineages between human CD45⁺ and CD45⁺/GFP⁺ cells performed by mixed-effects model (REML), followed by post hoc analysis with Dunnett's test (within groups).
- [0191] (F-H) Chimerism of GFP⁺ cells observed within CD19⁺ B cells, CD13⁺ myeloid cells and CD3⁺ T cells at the end of the experiment in PB (F), in spleen (G) and in BM (H) after M-HSCT with CD34⁺ cells gene edited as in FIG. 5A, in NSGW41 mice. Mixed-effects model (REML), followed by post hoc analysis with Tukey's test (between groups) or by post hoc analysis with Dunnett's test (within groups).
- [0192] (I) Percentage of CXCR4^{high} cells in HSPCs (CD34⁺ CD133⁺ CD90⁺), electroporated with CXCR4 variants mRNA. Kruskal-Wallis test, followed by post hoc analysis with Dunn's test.
- [0193] (J) CXCR4^{high} MFI in HSPCs (CD34⁺ CD133⁺ CD90⁺), electroporated with CXCR4 variants mRNA. Kruskal-Wallis test, followed by post hoc analysis with Dunn's test.
- [0194] Results are mean±SEM, with n ≥8 for data collected in vivo on NSGW41 mice, with n ≥5 for data collected in vivo on NSG mice and n ≥5 for data collected in vitro (3 different donors).
- [0195] FIG. 12. Transient overexpression of drug-resistant CXCR4 variant confers an engraftment advantage in vivo.
- [0196] (A) Schematic representation of the experimental design. NSGW41 or NBSGW mice were humanized with human mobilized peripheral blood CD34⁺ cells until 10% chimerism was achieved. Mice were then mobilized with G-CSF for 7 days through subcutaneous pump implantations and with two injections of AMD3100 and BIO5192 at day 6 and 7. For the second transplant, GFP lentiviral vector-transduced cells from the same donor used to humanize the mice were electroporated with either CXCR4 wild type or CXCR4^{D262N} variant. The donor cells were then transplanted either at 3 h or immediately after the last injection of AMD3100.
- [0197] (B) Human chimerism over time after mobilization, expressed as % of human CD45⁺ cells present in peripheral blood (right panel), and exchange efficiency (left panel) expressed as % of GFP⁺ cells within the hCD45⁺ population. CXCR4 Var=CXCR4 D262N.
- [0198] (C) Mobilization efficiency of the standard protocol (G7AB) or the modified protocol with AMD3465 (G7AB*) measured as white blood cell count (WBC, left panel), and human CD34⁺CD38⁻ cells (right panel).
- [0199] (D) Human chimerism over time after mobilization, expressed as % of hCD45⁺ cells in peripheral blood (right panel), and exchange efficiency (left panel) expressed as % of GFP⁺ cells within the hCD45⁺ population.

DETAILED DESCRIPTION

[0200] Various preferred features and embodiments of the present invention will now be described by way of non-limiting examples. This disclosure is not limited by the exemplary methods and materials disclosed herein, and any methods and materials similar or equivalent to those described herein can be used in the practice or testing of embodiments of this disclosure. The skilled person will understand that they can combine all features of the invention disclosed herein without departing from the scope of the invention as disclosed.

[0201] It must be noted that as used herein and in the appended claims, the singular forms “a”, “an”, and “the” include plural referents unless the context clearly dictates otherwise.

[0202] The terms “comprising”, “comprises” and “comprised of” as used herein are synonymous with “including”, “includes” or “containing”, “contains”, and are inclusive or open-ended and do not exclude additional, non-recited members, elements or method steps. The terms “comprising”, “comprises” and “comprised of” also include the term “consisting of”.

[0203] Numeric ranges are inclusive of the numbers defining the range. Unless otherwise indicated, any nucleic acid sequences are written left to right in 5' to 3' orientation; amino acid sequences are written left to right in amino to carboxy orientation, respectively.

[0204] The publications discussed herein are provided solely for their disclosure prior to the filing date of the present application. Nothing herein is to be construed as an admission that such publications constitute prior art to the claims appended hereto.

Haematopoietic Stem and/or Progenitor Cell Transplantation

[0205] In one aspect, the invention provides a population of haematopoietic stem and/or progenitor cells (HSPCs) for use in HSPC transplantation. In preferred embodiments, the subject is subjected to a regimen for mobilisation of endogenous HSPCs before and/or during the HSPC transplantation.

[0206] In one aspect, the invention provides a method for HSPC transplantation, the method comprising administering a population of HSPCs to a subject in need thereof. In preferred embodiments, the subject is subjected to a regimen for mobilisation of endogenous HSPCs before and/or during the administration of the population of HSPCs.

[0207] In one aspect, the invention provides a population of haematopoietic stem and/or progenitor cells (HSPCs) for use in HSPC transplantation, the HSPC transplantation comprising:

[0208] (a) administering one or more HSPC mobiliser to a subject to mobilise endogenous HSPCs from the subject's bone marrow; and

[0209] (b) administering the population of HSPCs to the subject.

[0210] In one aspect, the invention provides a method for haematopoietic stem and/or progenitor cell (HSPC) transplantation in a subject in need thereof, the method comprising:

[0211] (a) administering one or more HSPC mobiliser to the subject to mobilise the subject's endogenous HSPCs; and

[0212] (b) administering a population of HSPCs to the subject.

[0213] Haematopoietic stem/progenitor cell transplantation (HSCT) may refer to the transplantation of multipotent hematopoietic stem and/or progenitor cells, which are usually derived from bone marrow, peripheral blood, or umbilical cord blood. HSCT is a medical procedure in the fields of haematology and oncology, most often performed for people with diseases of the blood or bone marrow, or certain types of cancer.

[0214] In some embodiments, the HSCT is an autologous HSCT. By “autologous HSCT” it is to be understood that the population of HSPCs (which may then be cultured ex vivo

and/or genetically engineered) is obtained from the same subject to which they are subsequently administered. Autologous transplant procedures are advantageous as they avoid problems associated with immunological incompatibility and are available to subjects irrespective of the availability of a genetically matched donor.

[0215] In some embodiments, the HSCT is an allogeneic HSCT. By “allogeneic HSCT” it is to be understood that the population of HSPCs (which may then be cultured ex vivo and/or genetically engineered) is obtained from a different subject as that to which they are subsequently administered. Preferably, the donor will be genetically matched to the subject to which the HSPCs are administered to minimise the risk of immunological incompatibility.

[0216] The subject may be subjected to multiple HSCTs. In some embodiments, the subject is subjected to two or more, three or more, four or more, or five or more HSCTs. In some embodiments, step (a) (or the regimen for mobilisation of endogenous HSPCs) is repeated one or more times, two or more times, three or more times, four or more times or five or more times. In some embodiments, step (b) (or the administration of the HSPCs) is repeated one or more times, two or more times, three or more times, four or more times or five or more times. In some embodiments, step (a) (or the regimen for mobilisation of endogenous HSPCs) and step (b) (or the administration of the HSPCs) are both repeated one or more times, two or more times, three or more times, four or more times or five or more times.

Haematopoietic Stem and Progenitor Cells (HSPCs)

[0217] Haematopoietic stem cells (HSCs) are multipotent stem cells that may be found, for example, in peripheral blood, bone marrow and umbilical cord blood. HSCs are capable of self-renewal and differentiation into any blood cell lineage. They are capable of recolonising the entire immune system, and the erythroid and myeloid lineages in all the haematopoietic tissues (such as bone marrow, spleen and thymus). They provide for life-long production of all lineages of haematopoietic cells.

[0218] Haematopoietic progenitor cells (HPCs) have the capacity to differentiate into a specific type of cell. In contrast to stem cells however, they are already far more specific: they are pushed to differentiate into their “target” cell. A difference between stem cells and progenitor cells is that stem cells can replicate indefinitely, whereas progenitor cells can only divide a limited number of times. Haematopoietic progenitor cells can be rigorously distinguished from HSCs only by functional in vivo assay (i.e. transplantation and demonstration of whether they can give rise to all blood lineages over prolonged time periods).

Haematopoietic Stem and/or Progenitor Cell (HSPC) Sources

[0219] A population of haematopoietic stem and/or progenitor cells (HSPCs) may be obtained from a tissue sample. For example, a population of haematopoietic stem and/or progenitor cells may be obtained from peripheral blood (e.g. adult and foetal peripheral blood), umbilical cord blood, bone marrow, liver or spleen. Preferably, these cells are obtained from peripheral blood or bone marrow.

[0220] A population of HSPCs may be obtained after the subject has been subjected to a regimen for mobilisation of endogenous HSPCs. The haematopoietic stem and/or progenitor cells may be mobilized peripheral blood (mPB) haematopoietic stem and/or progenitor cells. Mobilisation

may be carried out using, for example, GCSF, Plerixafor, BIO5192, GRO β (GRO β Δ 4/CXCL2 Δ 4) (see e.g. Fukuda, et al. (2007) Blood 110: 860-869) or combinations thereof. Other agents, such as NSAIDs and dipeptidyl peptidase inhibitors, may also be useful as mobilizing agents.

[0221] With the availability of the stem cell growth factors GM-CSF and G-CSF, most HSCT procedures are now performed using stem cells collected from the peripheral blood, rather than from the bone marrow. Collecting peripheral blood stem cells provides a bigger graft, does not require that the donor be subjected to general anaesthesia to collect the graft, results in a shorter time to engraftment and may provide for a lower long-term relapse rate. Bone marrow may be collected by standard aspiration methods (either steady-state or after mobilisation), or by using next-generation harvesting tools (e.g. Marrow Miner).

[0222] HSPCs may also be derived from induced pluripotent stem cells.

HSPC Characteristics

[0223] HSPCs are typically of low forward scatter and side scatter profile by flow cytometric procedures. Some are metabolically quiescent, as demonstrated by Rhodamine labelling which allows determination of mitochondrial activity. HSPCs may comprise certain cell surface markers such as CD34, CD45, CD133, CD90 and CD49f. They may also be defined as cells lacking the expression of the CD38 and CD45RA cell surface markers. However, expression of some of these markers is dependent upon the developmental stage and tissue-specific context of the HSPC. Some HSPCs called “side population cells” exclude the Hoechst 33342 dye as detected by flow cytometry. Thus, HSPCs have descriptive characteristics that allow for their identification and isolation.

[0224] CD34 and CD133 are the most useful positive markers for HSPCs. Some HSPCs are also positive for lineage markers such as CD90, CD49f and CD93. However, these markers may need to be used in combination for HSPC enrichment. By “positive marker” it is to be understood that human HSPCs express these markers. In some embodiments, HSPCs are CD34+.

[0225] CD38 is the most established and useful single negative marker for human HSPCs. Human HSPCs may also be negative for lineage markers such as CD2, CD3, CD14, CD16, CD19, CD20, CD24, CD36, CD56, CD66b, CD271 and CD45RA. However, these markers may need to be used in combination for HSPC enrichment. By “negative marker” it is to be understood that human HSPCs lack the expression of these markers. In some embodiments, HSPCs are CD34+ CD38-.

Differentiated Cells

[0226] In contrast to HSPCs, a differentiated cell is a cell which has become more specialised. Differentiation occurs during the development of a multicellular organism as the organism changes from a single zygote to a complex system of tissues and cell types. Differentiation is also a common process in adults: adult stem cells divide and create fully-differentiated daughter cells during tissue repair and normal cell turnover. Differentiation dramatically changes a cell's size, shape, membrane potential, metabolic activity and responsiveness to signals. These changes are largely due to highly-controlled modifications in gene expression. In other

words, a differentiated cell is a cell which has specific structures and performs certain functions due to a developmental process which involves the activation and deactivation of specific genes.

[0227] A differentiated cell includes differentiated cells of the haematopoietic lineage such as monocytes, macrophages, neutrophils, basophils, eosinophils, erythrocytes, megakaryocytes/platelets, dendritic cells, T-cells, B-cells and NK-cells. For example, differentiated cells of the haematopoietic lineage can be distinguished from HSPCs by detection of cell surface molecules which are not expressed or are expressed to a lesser degree on undifferentiated cells. Examples of suitable human lineage markers include CD33, CD13, CD14, CD15 (myeloid), CD19, CD20, CD22, CD79a (B), CD36, CD71, CD235a (erythroid), CD2, CD3, CD4, CD8 (T) and CD56 (NK).

Mobilisation of Endogenous HSPCs

[0228] Any suitable regimen may be used for mobilisation of endogenous HSPCs from the subject's bone marrow.

[0229] In one aspect, the present invention provides a method of mobilizing endogenous HSPCs from a subject's bone marrow, the method comprising administering one or more HSPC mobiliser to the subject.

[0230] In one aspect, the present invention provides one or more HSPC mobiliser for use in mobilizing endogenous HSPCs from a subject's bone marrow, wherein the one or more HSPC mobiliser is administered to the subject.

[0231] In one aspect, the present invention provides one or more HSPC mobiliser for use in HSPC transplantation, the HSPC transplantation comprising:

[0232] (a) administering the one or more HSPC mobiliser to a subject to mobilise endogenous HSPCs from the subject's bone marrow; and

[0233] (b) administering a population of HSPCs to the subject.

[0234] As used herein, a “HSPC mobiliser” or “HSPC mobilization agent” may refer to an agent which, when administered to a subject, mobilizes endogenous HSPCs from their niche in bone marrow into circulation. Suitable HSPC mobilization agents will be known to those of skill in the art (see e.g. Domingues, M. J., et al., 2017. International journal of hematology, 105(2), pp. 141-152) and may include a granulocyte colony stimulating factor (G-CSF), a CXCR4 antagonist (e.g. plerixafor (AMD3100), POL6326 (balixafortide), TG-0054 (burixafor), BKT140 (BL8040), LY2510924, ALX-0651), a VLA-4 antagonist (e.g. BIO5192, natalizumab), a SDF-1 antagonist (e.g. NOX-A12), a CXCR2 agonist (e.g. GRO β (SB-251353)), bortezomib, a PTH receptor agonist (e.g. PTH (teriparatide)), a FLT3 agonist (e.g. CDX-301 (rhFLT3L)), meloxicam, or a TPO receptor agonist (e.g. eltrombopag).

[0235] In some embodiments, the one or more HPSC mobiliser is selected from a granulocyte colony-stimulating factor (G-CSF), a CXCR4 antagonist and a VLA-4 antagonist, or any combination thereof. In some embodiments, the one or more HPSC mobiliser is a G-CSF and a CXCR4 antagonist. In some embodiments, the one or more HPSC mobiliser is a CXCR4 antagonist and a VLA-4 antagonist. In preferred embodiments, the one or more HPSC mobiliser is G-CSF, a CXCR4 antagonist and a VLA-4 antagonist.

[0236] In some embodiments, the regimen for mobilisation of endogenous HSPCs comprises:

- [0237] (i) administering a G-CSF for at least about 3 days, at least about 4 days, at least about 5 days, at least about 6 days, or at least about 7 days;
- [0238] (ii) administering a CXCR4 antagonist for at least about 1 day, at least about 2 days, or at least about 3 days; and/or
- [0239] (iii) administering a VLA-4 antagonist for at least about 1 day, at least about 2 days, or at least about 3 days.
- [0240] In some embodiments:
- [0241] (i) the subject is administered a G-CSF for at least about 3 days, at least about 4 days, at least about 5 days, at least about 6 days, or at least about 7 days, optionally before the population of HSPCs is administered;
- [0242] (ii) the subject is administered a CXCR4 antagonist for at least about 1 day, at least about 2 days, or at least about 3 days, optionally before the population of HSPCs is administered; and/or
- [0243] (iii) the subject is administered a VLA-4 antagonist for at least about 1 day, at least about 2 days, or at least about 3 days, optionally before the population of HSPCs is administered.
- [0244] In some embodiments:
- [0245] (i) the subject is administered at least 3 daily doses, at least 4 daily doses, at least 5 daily doses, at least 6 daily doses, or at least 7 daily doses of G-CSF, optionally before the population of HSPCs is administered;
- [0246] (ii) the subject is administered at least 1 daily dose, at least 2 daily doses, or at least 3 daily doses of a CXCR4 antagonist, optionally before the population of HSPCs is administered; and/or
- [0247] (iii) the subject is administered at least 1 daily dose, at least 2 daily doses, or at least 3 daily doses of a VLA-4 antagonist, optionally before the population of HSPCs is administered.
- [0248] In some embodiments, the regimen for mobilisation of endogenous HSPCs comprises:
- [0249] (i) administering a G-CSF for about 7 days;
- [0250] (ii) administering a CXCR4 antagonist for about 2 days; and
- [0251] (iii) optionally, administering a VLA-4 antagonist for about 2 days.
- [0252] In some embodiments:
- [0253] (i) the subject is administered a G-CSF for about 7 days, before the population of HSPCs is administered;
- [0254] (ii) the subject is administered a CXCR4 antagonist for about 2 days before the population of HSPCs is administered; and
- [0255] (iii) optionally, the subject is administered a VLA-4 antagonist for about 2 days before the population of HSPCs is administered.
- [0256] In some embodiments:
- [0257] (i) the subject is administered 7 daily doses of a G-CSF before the population of HSPCs is administered; and
- [0258] (ii) the subject is administered 2 daily doses of a CXCR4 antagonist before the population of HSPCs is administered; and
- [0259] (iii) optionally, the subject is administered 2 daily doses of a VLA-4 antagonist before the population of HSPCs is administered.

[0260] The one or more HPSC mobiliser may be administered by any suitable route. Suitably, the one or more HPSC mobiliser is administered systemically, for example, the HPSC mobiliser may be administered intravenously, subcutaneously, or intraperitoneally.

[0261] The one or more HPSC mobiliser may be administered using any suitable dosage intervals. Suitably, the one or more HPSC mobiliser is administered as a single daily dose.

[0262] In some embodiments, the regimen for mobilisation of endogenous HSPCs is followed by a step of harvesting the mobilized endogenous HSPCs from the circulation, prior to administration of the population of HSPCs. Such a step may be used to deplete the endogenous HSPCs, thereby further enhancing engraftment of exogenous HSPCs. The mobilized endogenous HSPCs may be harvested by any suitable method described herein.

Granulocyte Colony-Stimulating Factor (G-CSF)

[0263] In some embodiments, the subject is administered a G-CSF to mobilise endogenous HSPCs from the subject's bone marrow.

[0264] Granulocyte colony-stimulating factor (G-CSF) is also known as colony-stimulating factor 3 (CSF 3) and is a glycoprotein that stimulates the bone marrow to produce granulocytes and stem cells and release them into the bloodstream.

[0265] Suitable G-CSFs will be known to the skilled person. Recombinant granulocyte colony stimulating factor (filgrastim/lenograstim) is the most common mobilization agent and may be administered daily, either alone or in conjunction with chemotherapy (Bendall, L. J. and Bradstock, K. F., 2014. Cytokine & growth factor reviews, 25(4), pp. 355-367). Alternatively, use of the PEGylated variant of G-CSF (Pegfilgrastim), which has a significantly longer half-life, may eliminate the need for daily dosing (Piedmonte, D. M. and Treuheit, M. J., 2008. Advanced drug delivery reviews, 60(1), pp. 50-58).

[0266] Any suitable G-CSF mobilisation regimen may be used. Suitable doses of G-CSF will be known to the skilled person. Suitably, for human subjects G-CSF may be administered in a dose of from about 5 µg/kg/day to about 15 µg/kg/day, or about 10 µg/kg/day. Suitable routes of administration will be known to the skilled person. Suitably, the G-CSF may be administered by intravenous or subcutaneous injection.

CXCR4 Antagonists

[0267] In some embodiments, the subject is administered a CXCR4 antagonist to mobilise endogenous HSPCs from the subject's bone marrow.

[0268] A "CXCR4 antagonist" or "CXCR4 inhibitor" may refer to a substance that disrupts the interaction between CXCR4 and its ligand SDF-1. Suitable CXCR4 antagonists will be known to the skilled person and include plerixafor (AMD3100), POL6326 (balixafortide), TG-0054 (burixafor), BKT140 (BL8040), LY2510924, ALX-0651, and EPI-X4, and derivatives thereof (see e.g. Domingues, M. J., et al., 2017. International journal of hematology, 105(2), pp. 141-152).

[0269] In some embodiments, the CXCR4 antagonist is plerixafor (AMD3100). Plerixafor (AMD3100) is a small bicyclam molecule that reversibly binds and blocks CXCR4

and thereby inhibits the binding with its ligand stroma-cell-derived factor-1 (SCF-1). This process results in the release of HSPCs from its niches in the bone marrow stroma and to the circulation (Bilgin, Y. M. and de Greef, G. E., 2016. *Current opinion in hematology*, 23(1), pp. 67-71).

[0270] Any suitable CXCR4 antagonist mobilisation regimen may be used. Suitably, for human subjects AMD3100 may be administered in a dose of from about 100 µg/kg/day to about 500 µg/kg/day, about 160 µg/kg/day, about 240 µg/kg/day, or about 480 µg/kg/day (see e.g. De Clercq, E., *Antiviral Chemistry and Chemotherapy*, 27). Suitable routes of administration will be known to the skilled person. Suitably, the AMD3100 may be administered by subcutaneous injection.

VLA-4 Antagonists

[0271] In some embodiments, the subject is administered a VLA-4 antagonist to mobilise endogenous HSPCs from the subject's bone marrow.

[0272] A "VLA-4 antagonist" or "VLA-4 inhibitor" may refer a substance that disrupts the interaction between VLA-4 and one or more of its natural ligands (e.g. VCAM-1). Suitable VLA-4 antagonists will be known to the skilled person and include BIO5192, firsatgrast (SB-683699), BOP and natalizumab, and derivatives thereof (see e.g. Domingues, M. J., et al., 2017. *International journal of hematology*, 105(2), pp. 141-152). In some embodiments, the VLA-4 antagonist is an ITGA4 antagonist.

[0273] In some embodiments, the VLA-4 antagonist is BIO5192. BIO5192 is a selective and potent small molecule inhibitor of VLA-4, with an affinity of 250- to 1000-fold higher than for the related $\alpha 4 \beta 7$ integrin (Ramirez, P., et al., 2009. *Blood*, 114(7), pp. 1340-1343).

[0274] In some embodiments, the VLA-4 antagonist is natalizumab. Natalizumab is a monoclonal antibody which targets the $\alpha 4 \beta 1$ integrin that is currently used for the treatment of multiple sclerosis (MS) and Crohn's disease (see e.g. Rudick, R., et al., 2013. *JAMA neurology*, 70(2), pp. 172-182).

Population of HSPCs

[0275] Any suitable population of HSPCs may be administered to the subject. The population of HSPCs which is administered to the subject may be referred to as "exogenous" HSPCs to distinguish them from the "endogenous" HSPCs which are present in the subject's peripheral blood following mobilisation and prior to administration of the population of HSPCs.

[0276] In some embodiments, the population of HSPCs is autologous and/or allogenic. In some embodiments, the population of HSPCs is autologous or allogenic.

[0277] In some embodiments, the population of HSPCs is autologous. If the population of HSPCs is autologous, it may, for example, have been harvested from the subject's peripheral blood, bone marrow and/or cord blood. The population of HSPCs may have been harvested from the peripheral blood following mobilization, either performed by a prior mobilisation regimen or, e.g. in the case of concurrent administration, during the mobilisation regimen of the present invention, or from the bone marrow or the cord blood.

[0278] The population of HSPCs administered to the subject may be an HSPC according to the present invention. The

inventors have found that the HSPCs of the present invention may be preferentially exchanged and/or selectively engrafted in subjects that have been subjected to mobilisation of their endogenous HSPCs.

[0279] In some embodiments, the population of HSPCs is genetically engineered. The term "genetically engineered" as used herein refers to the manipulation of a precursor cell, for example a natural cell, by the introduction of exogenous genetic material. Accordingly, in the context of the present invention a HSPC may be genetically engineered by the introduction of genetic material that encodes and enables the expression of one or more exogenous engraftment enhancer by the cell.

Isolation and Enrichment of HSPCs

[0280] The population of HSPCs may be an isolated population of HSPCs. By "isolated population" of cells it is to be understood that the population of cells is not comprised within the body. An isolated population of cells may have been previously removed from a subject. An isolated population of cells may be cultured and manipulated ex vivo or in vitro using standard techniques known in the art. An isolated population of cells may later be reintroduced into a subject. Said subject may be the same subject from which the cells were originally isolated or a different subject.

[0281] A population of cells may be purified selectively for cells that exhibit a specific phenotype or characteristic, and from other cells which do not exhibit that phenotype or characteristic, or exhibit it to a lesser degree. For example, a population of cells that expresses a specific marker (such as CD34) may be purified from a starting population of cells. Alternatively, or in addition, a population of cells that does not express another marker (such as CD38) may be purified.

[0282] By "enriching" a population of cells for a certain type of cells it is to be understood that the concentration of that type of cells is increased within the population. The concentration of other types of cells may be concomitantly reduced.

[0283] Purification or enrichment may result in the population of cells being substantially pure of other types of cell. Purifying or enriching for a population of cells expressing a specific marker (e.g. CD34 or CD38) may be achieved by using an agent that binds to that marker, preferably substantially specifically to that marker.

[0284] An agent that binds to a cellular marker may be an antibody, for example an anti-CD34 or anti-CD38 antibody. The term "antibody" refers to complete antibodies or antibody fragments capable of binding to a selected target, and including Fv, ScFv, F(ab') and F(ab')₂, monoclonal and polyclonal antibodies, engineered antibodies including chimeric, CDR-grafted and humanised antibodies, and artificially selected antibodies produced using phage display or alternative techniques. In addition, alternatives to classical antibodies may also be used in the invention, for example "avibodies", "avimers", "anticalins", "nanobodies" and "DARPin".

[0285] The agents that bind to specific markers may be labelled so as to be identifiable using any of a number of techniques known in the art. The agent may be inherently labelled, or may be modified by conjugating a label thereto. By "conjugating" it is to be understood that the agent and label are operably linked. This means that the agent and label are linked together in a manner which enables both to carry out their function (e.g. binding to a marker, allowing fluo-

rescent identification, or allowing separation when placed in a magnetic field) substantially unhindered. Suitable methods of conjugation are well known in the art and would be readily identifiable by the skilled person.

[0286] A label may allow, for example, the labelled agent and any cell to which it is bound to be purified from its environment (e.g. the agent may be labelled with a magnetic bead or an affinity tag, such as avidin), detected or both. Detectable markers suitable for use as a label include fluorophores (e.g. green, cherry, cyan and orange fluorescent proteins) and peptide tags (e.g. His tags, Myc tags, FLAG tags and HA tags).

[0287] A number of techniques for separating a population of cells expressing a specific marker are known in the art. These include magnetic bead-based separation technologies (e.g. closed-circuit magnetic bead-based separation), flow cytometry, fluorescence-activated cell sorting (FACS), affinity tag purification (e.g. using affinity columns or beads, such as biotin columns to separate avidin-labelled agents) and microscopy-based techniques.

[0288] It may also be possible to perform the separation using a combination of different techniques, such as a magnetic bead-based separation step followed by sorting of the resulting population of cells for one or more additional (positive or negative) markers by flow cytometry. Clinical grade separation may be performed, for example, using the CliniMACS® system (Miltenyi). This is an example of a closed-circuit magnetic bead-based separation technology.

[0289] It is also envisaged that dye exclusion properties (e.g. side population or rhodamine labelling) or enzymatic activity (e.g. ALDH activity) may be used to enrich for HSPCs.

Culturing of HSPCs

[0290] In some embodiments, the population of HSPCs is cultured *ex vivo* prior to administration.

[0291] The present inventors have shown that *ex vivo* culture may endow HSPCs with a migration advantage by rescuing CXCR4 expression and therefore cultured HSPCs may outcompete mobilized endogenous HSPCs for engraftment in depleted BM niches.

[0292] Any suitable *ex vivo* culture conditions may be used. For example, *ex vivo* culture conditions which are standard in the art during lentivirus-based gene replacement protocols may allow recovery of surface molecules for homing/engraftment, whose expression is lowered by mobilization.

[0293] Suitably, the HSPCs are seeded at the concentration of about 1×10^5 cells/ml to about 1×10^6 cells per ml, e.g. about 1×10^6 cells per ml. Suitably, the HSPCs are cultured in a 5% CO₂ humidified atmosphere at 37° C. Suitably, the HSPCs are cultured for at least one day, at least two day, or at least three days. Suitably, the HSPCs are cultured for about one day, about two days, or about three days. In some embodiments, the HSPCs are cultured for about three days.

[0294] Any suitable culture medium may be used. Suitably, the HSPCs are cultured in serum-free cell culture medium. For example, commercially available medium such as StemSpan medium may be used, which contains bovine serum albumin, insulin, transferrin, and supplements in Iscove's MDM. The culture medium may be also supplemented with one or more antibiotic (e.g. penicillin, streptomycin).

[0295] The culture medium may be supplemented with one or more cytokines and/or growth factors. As used herein, a "cytokine" is any cell signalling substance and includes chemokines, interferons, interleukins, lymphokines, and tumour necrosis factors. As used herein, a "growth factor" is any substance capable of stimulating cell proliferation, wound healing, or cellular differentiation. The terms "cytokine" and "growth factor" may overlap.

[0296] The culture medium may comprise one or more early-acting cytokine, one or more transduction enhancer, and/or one or more expansion enhancer.

[0297] As used herein, an "early-acting cytokine" is a cytokine which stimulates HSPCs. Early-acting cytokines include thrombopoietin (TPO), stem cell factor (SCF), and Flt3-ligand (FLT3-L). In some embodiments, the culture medium comprises at least one early-acting cytokine. Any suitable concentration of early-acting cytokine may be used. For example, 1-1000 ng/ml, or 10-1000 ng/ml, or 10-500 ng/ml. In some embodiments, the culture medium comprises SCF. The concentration of SCF may be about 10-1000 ng/ml, about 50-500 ng/ml, or about 100-300 ng/ml. In some embodiments, the culture medium comprises FLT3-L. The concentration of FLT3-L may be about 10-1000 ng/ml, about 50-500 ng/ml, or about 100-300 ng/ml. In some embodiments, the culture medium comprises TPO. The concentration of TPO may be about 5-500 ng/ml, about 10-200 ng/ml, or about 20-100 ng/ml. In some embodiments, the culture medium comprises SCF (e.g. in a concentration of about 300 ng/ml), FLT3-L (e.g. in a concentration of about 300 ng/ml), and TPO (e.g. in a concentration of about 100 ng/ml).

[0298] As used herein, a "transduction enhancer" is a substance that is capable of improving viral transduction of HSPCs. Suitable transduction enhancers include LentiBOOST, prostaglandin E2 (PGE2) or a derivative thereof, protamine sulfate (PS), Vectofusin-1, ViraDuctin, RetroNectin, staurosporine (Stauro), 7-hydroxy-stauro, human serum albumin, and polyvinyl alcohol. In some embodiments, the culture medium comprises at least one transduction enhancer. Any suitable concentration of transduction enhancer may be used, for example as described in Schott, J. W., et al., 2019. *Molecular Therapy-Methods & Clinical Development*, 14, pp. 134-147 or Yang, H., et al., 2020. *Molecular Therapy-Nucleic Acids*, 20, pp. 451-458. In some embodiments, the culture medium comprises PGE2. Suitably, the PGE2 derivative is 16,16-dimethyl prostaglandin E2 (dmPGE2). The concentration of PGE2 or derivative thereof may be about 1-100 µM, about 5-20 µM, or about 10 µM.

[0299] As used herein, an "expansion enhancer" is a substance that is capable of improving expansion of HSPCs. Suitable expansion enhancers include UM171, UM729, StemRegenin1 (SR1), diethylaminobenzaldehyde (DEAB), LG1506, BIO (GSK3p inhibitor), NR-101, trichostatin A (TSA), garcinol (GAR), valproic acid (VPA), copper chelator, tetraethylenepentamine, and nicotinamide. In some embodiments, the culture medium comprises at least one expansion enhancer. Any suitable concentration of expansion enhancer may be used, for example as described in Huang, X., et al., 2019. *F1000Research*, 8, 1833. In some embodiments, the culture medium comprises UM171 or UM729. The concentration of UM171 may be about 10-200 nM, about 20-100 nM, or about 35 nM. In some embodiments, the culture medium comprises SR1. The concentration of SR1 may be about 0.1-10 µM, about 0.5-5 µM, or

about 1 μ M. In some embodiments, the culture medium comprises UM171 (e.g. in a concentration of about 35 nM) and SR1 (e.g. in a concentration of about 1 μ M).

[0300] In some embodiments, the culture medium comprises SCF (e.g. in a concentration of about 300 ng/ml), FLT3-L (e.g. in a concentration of about 300 ng/ml), TPO (e.g. in a concentration of about 100 ng/ml), UM171 (e.g. in a concentration of about 35 nM) and SR1 (e.g. in a concentration of about 1 μ M).

[0301] In some embodiments, the culture medium comprises SCF (e.g. in a concentration of about 300 ng/ml), FLT3-L (e.g. in a concentration of about 300 ng/ml), TPO (e.g. in a concentration of about 100 ng/ml), UM171 (e.g. in a concentration of about 35 nM), SR1 (e.g. in a concentration of about 1 μ M), and PGE2 (e.g. in a concentration of about 10 μ M).

Engraftment Enhancers

[0302] In preferred embodiments, the population of HSPCs is genetically engineered to express one or more engraftment enhancer.

[0303] The present inventors have shown that expression of engraftment enhancers may endow HSPCs with a migration advantage and therefore exogenous HSPCs expressing engraftment enhancers may outcompete mobilized endogenous HSPCs for engraftment in depleted BM niches.

[0304] In preferred embodiments, the expression of the one or more engraftment enhancer is overexpression.

[0305] In some embodiments, the expression of the one or more engraftment enhancer is stable expression.

[0306] In preferred embodiments, the expression of the one or more engraftment enhancer is transient expression.

[0307] In one embodiment, the HSPCs are transduced or transfected with one or more polynucleotide encoding the one or more engraftment enhancer.

[0308] In one embodiment, the HSPCs are transduced or transfected with one or more vectors encoding the one or more engraftment enhancer.

[0309] In one embodiment, the HSPCs are transduced or transfected with one or more vectors encoding the one or more engraftment enhancer, wherein the vectors are selected from the group consisting of RNA vectors, integration-defective lentiviral vectors (IDLVs), adeno-associated viral (AAV) vectors and Sendai viral vectors. For example, an RNA polynucleotide encoding the one or more engraftment enhancer may be introduced into the HSPCs using RNA electroporation or by a non-viral delivery system. Each of these may enable transient expression.

[0310] In one embodiment, the HSPCs are transduced or transfected with one or more vectors encoding the one or more engraftment enhancer, wherein the vectors are RNA vectors. In one embodiment, the HSPCs are transduced or transfected with one or more vectors encoding the one or more engraftment enhancer, wherein the vectors are Sendai viral vectors.

[0311] In one embodiment, one or more engraftment enhancer is directly introduced into the HSPCs in the form of the protein, for example using protein electroporation. Direct protein introduction may enable the one or more engraftment enhancer to be introduced transiently to HSPCs.

[0312] In preferred embodiments, the HSPCs are transduced or transfected with one or more RNA polynucleotide encoding the one or more engraftment enhancer. Any RNA polynucleotide disclosed herein may be used.

[0313] Suitable engraftment enhancers are described herein and may include CXCR4, CD47, ITGA4, and KIT, or any combination thereof. In some embodiments, the one or more engraftment enhancer comprises or consists of CXCR4 (or a fragment or variant thereof). In some embodiments, the one or more engraftment enhancer comprises or consists of CD47 (or a fragment or variant thereof). In some embodiments, the one or more engraftment enhancer comprises or consists of ITGA4 (or a fragment or variant thereof). In some embodiments, the one or more engraftment enhancer comprises or consists of KIT (or a fragment or variant thereof).

[0314] In some embodiments, the one or more engraftment enhancer comprises two or more engraftment enhancers. In some embodiments, the one or more engraftment enhancer comprises three or more engraftment enhancers. In some embodiments, the one or more engraftment enhancer comprises four or more engraftment enhancers. In some embodiments, the one or more engraftment enhancer consists of one engraftment enhancer.

[0315] In some embodiments, the one or more engraftment enhancer consists of two engraftment enhancers. In some embodiments, the one or more engraftment enhancer consists of three engraftment enhancers. In some embodiments, the one or more engraftment enhancer consists of four engraftment enhancers.

[0316] In some embodiments, the one or more engraftment enhancer comprises or consists of CXCR4 (or a fragment or variant thereof) and CD47 (or a fragment or variant thereof). In some embodiments, the one or more engraftment enhancer comprises or consists of CXCR4 (or a fragment or variant thereof) and ITGA4 (or a fragment or variant thereof). In some embodiments, the one or more engraftment enhancer comprises or consists of CXCR4 (or a fragment or variant thereof) and KIT (or a fragment or variant thereof). In some embodiments, the one or more engraftment enhancer comprises or consists of CXCR4 (or a fragment or variant thereof), ITGA4 (or a fragment or variant thereof), and KIT (or a fragment or variant thereof). In some embodiments, the one or more engraftment enhancer comprises or consists of CXCR4 (or a fragment or variant thereof), CD47 (or a fragment or variant thereof), ITGA4 (or a fragment or variant thereof), and KIT (or a fragment or variant thereof). In some embodiments, the one or more engraftment enhancer comprises or consists of ITGA4 (or a fragment or variant thereof) and KIT (or a fragment or variant thereof).

Gene Edited or Gene-Corrected

[0317] The population of HSPCs may be genetically engineered. Suitably, the genetic engineering is in addition to the genetic engineering to express one or more engraftment enhancer.

[0318] In some embodiments, the method of the present invention further comprises a step of genetically engineering the population of HSPCs prior to administering the population of HSPCs.

[0319] In some embodiments, the population of HSPCs are genetically engineered to express a transgene, gene-edited, and/or gene-corrected.

[0320] In some embodiments, in addition to the engraftment enhancer, the population of HSPCs is genetically engineered to express a transgene. In some embodiments, the method of the present invention further comprises a step

of genetically engineering the population of HSPCs to express a transgene, prior to administering the population of HSPCs.

[0321] The transgene may be a nucleotide of interest (NOI). Preferably the nucleotide of interest gives rise to a therapeutic effect. Suitable NOIs include, but are not limited to, sequences encoding enzymes, cytokines, chemokines, hormones, antibodies, anti-oxidant molecules, engineered immunoglobulin-like molecules, single chain antibodies, fusion proteins, immune co-stimulatory molecules, immunomodulatory molecules, anti-sense RNA, microRNA, shRNA, siRNA, ribozymes, miRNA target sequences, a transdomain negative mutant of a target protein, toxins, conditional toxins, antigens, tumour suppressor proteins, growth factors, transcription factors, membrane proteins, surface receptors, anti-cancer molecules, vasoactive proteins and peptides, anti-viral proteins and ribozymes, and derivatives thereof (such as derivatives with an associated reporter group). The NOIs may also encode pro-drug activating enzymes.

[0322] An example of a NOI is the beta-globin chain which may be used for gene therapy of thalassemia/sickle cell disease. NOIs also include those useful for the treatment of other diseases requiring non-urgent/elective gene correction in the myeloid lineage such as: chronic granulomatous disease (CGD, e.g. the gp91phox transgene), leukocyte adhesion defects, other phagocyte disorders in patients without ongoing severe infections and inherited bone marrow failure syndromes (e.g. Fanconi anaemia), as well as primary immunodeficiencies (SCIDs). NOIs also include those useful in the treatment of lysosomal storage disorders and immunodeficiencies.

[0323] In some embodiments, the population of HSPCs is gene-edited. In some embodiments, the method of the present invention further comprises a step of gene editing the population of HSPCs, prior to administering the population of HSPCs.

[0324] The term “gene editing” refers to a type of genetic engineering in which a nucleic acid is inserted, deleted or replaced in a cell. Gene editing may be achieved using engineered nucleases, which may be targeted to a desired site in a polynucleotide (e.g. a genome). Such nucleases may create site-specific double-strand breaks at desired locations, which may then be repaired through non-homologous end-joining (NHEJ) or homologous recombination (HR), resulting in targeted mutations. Such nucleases may be delivered to a target cell using vectors, such as viral vectors.

[0325] Examples of suitable nucleases known in the art include zinc finger nucleases (ZFNs), transcription activator like effector nucleases (TALENs), and the clustered regularly interspaced short palindromic repeats (CRISPR)/Cas system (Gaj, T. et al. (2013) *Trends Biotechnol.* 31: 397-405; Sander, J. D. et al. (2014) *Nat. Biotechnol.* 32: 347-55). Meganucleases (Silve, G. et al. (2011) *Cur. Gene Ther.* 11: 11-27) may also be employed as suitable nucleases for gene editing.

[0326] The CRISPR/Cas system is an RNA-guided DNA binding system (van der Oost et al. (2014) *Nat. Rev. Microbiol.* 12: 479-92), wherein the guide RNA (gRNA) may be selected to enable a Cas9 domain to be targeted to a specific sequence. Methods for the design of gRNAs are known in the art. Furthermore, fully orthogonal Cas9 proteins, as well as Cas9/gRNA ribonucleoprotein complexes and modifications of the gRNA structure/composition to

bind different proteins, have been recently developed to simultaneously and directionally target different effector domains to desired genomic sites of the cells (Esvelt et al. (2013) *Nat. Methods* 10: 1116-21; Zetsche, B. et al. (2015) *Cell* pii: S0092-8674(15)01200-3; Dahlman, J. E. et al. (2015) *Nat. Biotechnol.* 2015 Oct. 5. doi: 10.1038/nbt.3390; Zalatan, J. G. et al. (2015) *Cell* 160: 339-50; Paix, A. et al. (2015) *Genetics* 201: 47-54), and are suitable for use in the invention.

[0327] In some embodiments, the population of HSPCs is gene-corrected. In some embodiments, the method of the present invention further comprises a step of gene correcting the population of HSPCs, prior to administering the population of HSPCs.

[0328] As used herein “gene-corrected” cells may refer to cells in which disease-causing mutations have been corrected. Site-specific genome editing using programmable endonuclease platforms such as CRISPR-Cas9, transcription activator-like effector nucleases or zinc-finger nucleases can inactivate harmful alleles, disable transcriptional repressor expression or their binding sites, precisely correct mutations or insert healthy gene copies into a genomic ‘safe harbour’. Alternatively, cells may be subject to gene transfer, for example by using viral vectors such as gammaretroviruses and lentiviruses to integrate a therapeutic gene into the genome of the recipient cell (Ferrari, G., et al. (2021). *Nat Rev Genet* 22, 216-234).

Administration of HSPCs

[0329] The subject may be administered the population of HSPCs during and/or after mobilisation of endogenous HSPCs.

[0330] The population of HSPCs may be administered in any suitable dose and via any suitable route of administration. Suitably, from about 1×10^6 to about 1×10^{10} cells/kg may be administered by intravenous infusion.

[0331] Suitable doses of transduced cell populations are such as to be therapeutically and/or prophylactically effective. The skilled person can readily determine an appropriate dose of one of the agents of the invention to administer to a subject without undue experimentation. Typically, a physician may determine the actual dosage which will be most suitable for an individual patient and it will depend on a variety of factors including the activity of the specific agent employed, the metabolic stability and length of action of that agent, the age, body weight, general health, sex, diet, mode and time of administration, rate of excretion, drug combination, the severity of the particular condition, and the individual undergoing therapy. There can of course be individual instances where higher or lower dosage ranges are merited, and such are within the scope of the invention.

[0332] Although the agents for use in the invention (in particular, the populations of cells) can be administered alone, they will generally be administered in admixture with a pharmaceutical carrier, excipient or diluent, particularly for human therapy.

[0333] In some embodiments, prior to the administration of the population of HSPCs, the mobilized endogenous HSPC are harvested. The mobilized endogenous HSPCs may be harvested during and/or after mobilisation of endogenous HSPCs. Such a step may be used to deplete the endogenous HSPCs, thereby further enhancing engraftment of exogenous HSPCs. The mobilized endogenous HSPCs may be harvested by any suitable method described herein.

Administration after Mobilisation

[0334] The population of HSPCs may be administered at and/or after the peak of mobilisation.

[0335] The “peak of mobilisation” may refer to the time at which the highest number of endogenous HSPCs are mobilized in the peripheral blood. The peak of mobilisation may be determined by any suitable method. In some embodiments, the peak of mobilisation is the time of highest count of mobilized white blood cells (WBC), Lin-SCA1+KIT+ cells (LSK), and/or Lin- SCA1+KIT+CD150+CD48- (SLAM HSC) in the subject’s peripheral blood.

[0336] In some embodiments, the population of HSPCs is administered at about the peak of mobilisation. In this context, “about” may refer to administration within 1 hour, within 50 minutes, within 40 minutes, within 30 minutes, within 20 minutes, or within 10 minutes of the peak of mobilisation. In some embodiments, the population of HSPCs is administered at the peak of mobilisation $\pm$ 1 hour. In some embodiments, the population of HSPCs is administered at the peak of mobilisation $\pm$ 30 minutes. In some embodiments, the population of HSPCs is administered at the peak of mobilisation $\pm$ 20 minutes. In some embodiments, the population of HSPCs is administered at the peak of mobilisation $\pm$ 10 minutes.

[0337] In some embodiments, the population of HSPCs is administered after the peak of mobilisation. In some embodiments, the population of HSPCs is administered within about 10 minutes, within about 20 minutes, within about 30 minutes, within about 40 minutes, within about 50 minutes, within about 1 hour, within about 2 hours, or within about 3 hours after the peak of mobilisation.

[0338] The present inventors have shown that the peak of mobilisation may be from about 1 hour to about 9 hours after the last administration of a HSPC mobiliser. In this context, the “last administration” refers to the last administration of a HSPC mobiliser in the regimen for mobilisation of endogenous HSPCs, which occurs prior to administration of the population of HSPCs. Thus, this does not exclude that further HSPC mobilisers may be administered to the subject after the population of HSPCs has been administered. For example, the subject may undergo multiple HSCTs, each comprising a separate step of administering one or more HSPC mobiliser to the subject.

[0339] In some embodiments, the population of HSPCs is administered within about 9 hours, within about 8 hours, within about 7 hours, within about 6 hours, within about 5 hours, within about 4 hours, within about 3 hours, within about 2 hours, or within about 1 hour after the last administration of a HSPC mobiliser. In some embodiments, the population of HSPCs is administered within about 3 hours, within about 2 hours, or within about 1 hour after the last administration of a HSPC mobiliser. In some embodiments, the population of HSPCs is administered from about 1 to about 9 hours, from about 1 to about 6 hours, from about 1 to about 5 hours, from about 1 to about 4 hours, from about 2 to about 4 hours, or from about 2 to about 3 hours after the last administration of a HSPC mobiliser. In some embodiments, the population of HSPCs is administered from about 2 to about 4 hours after the last administration of a HSPC mobiliser. In some embodiments, the population of HSPCs is administered about 3 hours, about 2 hours, or about 1 hour after the last administration of a HSPC mobiliser. In some

embodiments, the population of HSPCs is administered about 3 hours after the last administration of a HSPC mobiliser.

[0340] In some embodiments, the population of HSPCs is administered within about 9 hours, within about 8 hours, within about 7 hours, within about 6 hours, within about 5 hours, within about 4 hours, within about 3 hours, within about 2 hours, or within about 1 hour, after the regimen for mobilisation of endogenous HSPCs is completed. In some embodiments, the population of HSPCs is administered within about 3 hours, within about 2 hours, or within about 1 hour, after the regimen for mobilisation of endogenous HSPCs is completed. In some embodiments, the population of HSPCs is administered from about 1 to about 9 hours, from about 1 to about 6 hours, from about 1 to about 5 hours, from about 1 to about 4 hours, from about 2 to about 4 hours, or from about 2 to about 3 hours after the regimen for mobilisation of endogenous HSPCs is completed. In some embodiments, the population of HSPCs is administered from about 2 to about 4 hours after the regimen for mobilisation of endogenous HSPCs is completed. In some embodiments, the population of HSPCs is administered about 3 hours, about 2 hours, or about 1 hour after the regimen for mobilisation of endogenous HSPCs is completed. In some embodiments, the population of HSPCs is administered about 3 hours after the regimen for mobilisation of endogenous HSPCs is completed.

[0341] In some embodiments, the population of HSPCs is administered within about 9 hours, within about 8 hours, within about 7 hours, within about 6 hours, within about 5 hours, within about 4 hours, within about 3 hours, within about 2 hours, or within about 1 hour, after the one or more HSPC mobiliser is administered to the subject. In some embodiments, the population of HSPCs is administered within about 3 hours, within about 2 hours, or within about 1 hour, after the one or more HSPC mobiliser is administered to the subject. In some embodiments, the population of HSPCs is administered from about 1 to about 9 hours, from about 1 to about 6 hours, from about 1 to about 5 hours, from about 1 to about 4 hours, from about 2 to about 4 hours, or from about 2 to about 3 hours after the one or more HSPC mobiliser is administered to the subject. In some embodiments, the population of HSPCs is administered from about 2 to about 4 hours after the one or more HSPC mobiliser is administered to the subject. In some embodiments, the population of HSPCs is administered about 3 hours, about 2 hours, or about 1 hour after the one or more HSPC mobiliser is administered to the subject. In some embodiments, the population of HSPCs is administered about 3 hours after the one or more HSPC mobiliser is administered to the subject.

Administration During Mobilisation

[0342] The population of HSPCs may be administered concurrently with mobilisation of the endogenous HSPCs. In particular, when the population of HSPCs is genetically engineered to express one or more engraftment enhancer, the population of HSPCs may engraft in depleted BM niches despite the administration of mobilization agents. For example, the present inventors have shown that some CXCR4 variants are resistant to the CXCR4 antagonist AMD3100.

[0343] In some embodiments, the population of HSPCs is administered during mobilisation of endogenous HSPCs. In some embodiments, the population of HSPCs is adminis-

tered before the last administration of a HSPC mobiliser. In some embodiments, the population of HSPCs is administered before the regimen for mobilisation of endogenous HSPCs is completed. In some embodiments, the population of HSPCs is administered before the one or more HSPC mobiliser is administered to the subject.

[0344] In some embodiments, the population of HSPCs is genetically engineered to express an engraftment enhancer that is resistant to a mobilisation agent.

[0345] In some embodiments, the population of HSPCs is genetically engineered to express a CXCR4 variant which is resistant to a CXCR4 antagonist. In some embodiments, the population of HSPCs is genetically engineered to express a CXCR4 variant comprising one or more amino acid substitution selected from A175F, Q200A, D262N, and H281A. In some embodiments, the population of HSPCs is genetically engineered to express a CXCR4 variant comprising one or more amino acid substitution selected from A175F and D262N.

[0346] In some embodiments, the population of HSPCs is genetically engineered to express an IGA4 variant which is resistant to a VLA-4 antagonist.

[0347] In some embodiments, the population of HSPCs is genetically engineered to express a KIT variant that has increased resistance to a KIT-directed antibody or immunotoxin.

HSPC Engraftment and Chimerism

[0348] The administered population of HSPCs may engraft in the subject's bone marrow after transplantation.

[0349] The term "engraftment" as used herein refers to the ability of the haematopoietic stem and/or progenitor cells to populate and survive in a subject following their transplantation, i.e. in the short and/or long term after transplantation. For example, engraftment may refer to the number and/or percentages of haematopoietic cells descended from the transplanted haematopoietic stem and/or progenitor cells (e.g. graft-derived cells) that are detected about 1 day to 24 weeks, 1 day to 10 weeks, or 1-30 days or 10-30 days after transplantation. In the xenograft model of human haematopoietic stem and/or progenitor cell engraftment and repopulation, engraftment may be evaluated in the peripheral blood as the percentage of cells deriving from the human xenograft (e.g. positive for the CD45 surface marker), for example. In one embodiment, engraftment is assessed at about 1, 2, 3, 4, 5, 6, 7, 8, 9, 10, 15, 20, 25 or 30 days after transplantation. In another embodiment, engraftment is assessed at about 4, 5, 6, 7, 8, 9, 10, 11, 12, 13, 14, 15, 16, 17, 18, 19, 20, 21, 22, 23 or 24 weeks after transplantation. In another embodiment, engraftment is assessed at about 16-24 weeks, preferably 20 weeks, after transplantation.

[0350] Engraftment may be readily analysed by the skilled person. For example, the transplanted haematopoietic stem and/or progenitor cells may be engineered to comprise a marker (e.g. a reporter protein, such as a fluorescent protein), which can be used to quantify the graft-derived cells. Samples for analysis may be extracted from relevant tissues and analysed *ex vivo* (e.g. using flow cytometry).

[0351] The administered population of HSPCs may out-compete mobilized endogenous HSPCs for engraftment in the subject's BM. The relative engraftment may be determined by any suitable method and can be reported as the chimerism level (see e.g. Zimmerman, C., and Shenoy, S.

(2020). *Front Immunol* 11, 1791). A chimerism of 100% means that all HSPCs in the subject's BM post-transplantation originate from the exogenous HSPCs. A chimerism of 0% means that all HSPCs in the subject's BM post-transplantation originate from the endogenous HSPCs. Donor chimerism requirements to achieve disease control are widely variable in NMD and can range from as low as 10% to >90%.

[0352] In some embodiments, the chimerism level of the population of HSPCs in the subject's bone marrow is at least about 10%, at least about 15%, at least about 20%, at least about 25%, at least about 30%, at least about 35%, or at least about 40%. In some embodiments, the chimerism level of the population of HSPCs in the subject's bone marrow is at least about 30%.

[0353] In some embodiments, the chimerism level is stable. In this context, a "stable chimerism" may mean that the chimerism level does not significantly change (e.g. there is no statistically significant change). In some embodiments, the chimerism decreases by about 5% or less, about 4% or less, about 3% or less, about 2% or less, or about 1% or less. In some embodiments, the chimerism level is stable for at least about 4, at least about 5, at least about 6, at least about 7, at least about 8, at least about 9, at least about 10, at least about 11, at least about 12, at least about 13, at least about 14, at least about 15, at least about 16, at least about 17, at least about 18, at least about 19, at least about 20, at least about 21, at least about 22, at least about 23 or at least about 24 weeks.

[0354] In some embodiments, the chimerism level of the population of HSPCs in the subject's bone marrow is at least about 10%, at least about 15%, at least about 20%, at least about 25%, at least about 30%, at least about 35%, or at least about 40% after 24 weeks. In some embodiments, the chimerism level of the population of HSPCs in the subject's bone marrow is at least about 30% after 24 weeks.

Subject

[0355] The subject may be any suitable subject, for example a human or non-human animal.

[0356] In preferred embodiments, the subject is a human. The subject may be an infant, a child, an adolescent, an adult, or elderly.

[0357] Examples of non-human animals include vertebrates, for example mammals, such as non-human primates (particularly higher primates), dogs, rodents (e.g. mice, rats or guinea pigs), pigs and cats. The non-human animal may be a companion animal.

[0358] Many recipients of HSCTs are multiple myeloma or leukaemia patients who would not benefit from prolonged treatment with, or are already resistant to, chemotherapy. Candidates for HSCTs include paediatric cases where the patient has an inborn defect such as severe combined immunodeficiency or congenital neutropenia with defective stem cells, and also children or adults with aplastic anaemia who have lost their stem cells after birth. Other conditions treated with HSCT include sickle-cell disease, myelodysplastic syndrome, neuroblastoma, lymphoma, Ewing's Sarcoma, Desmoplastic small round cell tumour and Hodgkin's disease. More recently non-myeloablative, or so-called "mini transplant", procedures have been developed that require smaller doses of preparative chemotherapy and radiation. This has allowed HSCT to be conducted in the

elderly and other patients who would otherwise be considered too weak to withstand a conventional treatment regimen.

[0359] The subject may have any disorder which can benefit from HSCT, including cancers and non-malignant disorders. For example, the subject may have a disease selected from the group consisting of mucopolysaccharidosis type I (MPS-1), chronic granulomatous disorder (CGD), Fanconi anaemia (FA), sickle cell disease, Pyruvate kinase deficiency (PKD), Leukocyte adhesion deficiency (LAD), metachromatic leukodystrophy (MLD), globoid cell leukodystrophy (GLD), GM2 gangliosidosis, thalassemia, cancer, a genetic disease and a blood disease.

[0360] In some embodiments, the subject has cancer, a primary immunodeficiency, a lysosomal storage disorder, or a haemoglobinopathy. In some embodiments, the subject has a primary immunodeficiency, a lysosomal storage disorder, or a haemoglobinopathy. In some embodiment, the subject has a primary immunodeficiency, such as human primary combined immunodeficiency Hyper IgM Syndrome 1 (HIGM-1).

Pre-Conditioning

[0361] In preferred embodiments, the subject does not undergo chemotherapy or radiotherapy conditioning before administration of the HSPCs.

[0362] In one embodiment, the subject is subjected to a mild myeloablative, reduced intensity or non-myeloablative conditioning regimen before administration of the HSPCs.

[0363] In one embodiment, the subject is subjected to a mild myeloablative conditioning regimen before administration of the HSPCs.

[0364] In one embodiment, the subject is subjected to a reduced intensity conditioning regimen before administration of the HSPCs.

[0365] In one embodiment, the subject is subjected to a non-myeloablative conditioning regimen before administration of the HSPCs.

[0366] The invention may also utilise conditioning regimens that are based on the administration of toxins that targeted to HSPCs. Such methods may enable selective depletion or ablation of endogenous HSPC populations, and include those disclosed in US 2016/324982 for example. Such methods may be non-myeloablative. These methods may utilise one or more markers on the HSPC cell surface to target a toxin, such that the toxin is internalised by the HSPC. The methods may avoid toxicities associated with traditional conditioning methods.

[0367] In one embodiment, the subject subjected to conditioning with one or more HSPC-specific immunotoxins. Preferably, the one or more HSPC-specific immunotoxins are administered before administration of the HSPCs.

[0368] In one embodiment, the subject is administered an antibody conjugated to a toxin before administration of the HSPCs.

[0369] Suitable toxins include, but are not limited to saporin, diphtheria toxin, *pseudomonas* exotoxin A, Ricin A chain derivatives, a small molecule toxin, RNA polymerase II and/or III inhibitors (e.g. an amatoxin, such as α -amanitin, β -amanitin, γ -amanitin, ϵ -amanitin, amanin, amaninamide, amanullin or amanullinic acid), a DNA-damaging molecule (e.g. an anti-tubulin agent, a DNA crosslinking agent, a DNA alkylating agent or a mitotic disrupting agent; such as, maytansine) and combinations thereof.

[0370] Suitable antibodies include antibodies that bind to a cell surface protein selected from the group consisting of CD45, CD49d (VLA-4), CD49f (VLA-6), CD51, CD84, CD90, CD117, CD133, CD134 and CD184 (CXCR4).

[0371] In one embodiment, the immunotoxin is an anti-cKit immunotoxin. An anti-cKit immunotoxin may comprise an anti-cKit antibody conjugated to a toxin (see, for example, Czechowicz, A. et al. (2018) Biol Bone Marrow Transplant 24: S60 Abstract 54).

[0372] In one embodiment, the immunotoxin comprises an anti-cKit antibody. In one embodiment, the immunotoxin comprises a protein synthesis toxin, preferably a saporin. In a preferred embodiment, the immunotoxin is an anti-cKit-saporin immunotoxin.

[0373] In one embodiment, the immunotoxin comprises an anti-CD45 antibody. In one embodiment, the immunotoxin comprises a protein synthesis toxin, preferably a saporin. In a preferred embodiment, the immunotoxin is an anti-CD45-saporin immunotoxin.

[0374] Preferably, the HSPCs are administered to the subject after the toxin has dissipated from the bone marrow of the subject.

Exemplary Methods

[0375] In some embodiments, the method of the present invention comprises:

[0376] (a) administering one or more HSPC mobiliser to a subject to mobilise endogenous HSPCs from the subject's bone marrow; and

[0377] (b) administering a population of HSPCs to the subject at the peak of mobilisation, wherein the population of HSPCs is cultured ex vivo prior to administration and genetically engineered to express one or more engraftment enhancer.

[0378] In some embodiments, the method of the present invention comprises:

[0379] (a) administering one or more HSPC mobiliser to a subject to mobilise endogenous HSPCs from the subject's bone marrow; and

[0380] (b) administering a population of HSPCs to the subject at the peak of mobilisation, wherein the population of HSPCs is cultured ex vivo prior to administration and genetically engineered to express one or more engraftment enhancer,

wherein the subject does not undergo chemotherapy or radiotherapy conditioning before administration of the HSPCs.

[0381] In some embodiments, the method of the present invention comprises:

[0382] (a) (i) administering a G-CSF for about 7 days; (ii) administering a CXCR4 antagonist for about 2 days; and (iii) optionally, administering a VLA-4 antagonist for about 2 days to a subject to mobilise endogenous HSPCs from the subject's bone marrow; and

[0383] (b) administering a population of HSPCs to the subject at the peak of mobilisation, wherein the population of HSPCs is cultured ex vivo prior to administration and genetically engineered to express one or more engraftment enhancer,

wherein the subject does not undergo chemotherapy or radiotherapy conditioning before administration of the HSPCs.

[0384] In some embodiments, the method of the present invention comprises:

[0385] (a) (i) administering a G-CSF for about 7 days; (ii) administering a CXCR4 antagonist for about 2 days; and (iii) optionally, administering a VLA-4 antagonist for about 2 days to a subject to mobilise endogenous HSPCs from the subject's bone marrow; and

[0386] (b) administering a population of HSPCs to the subject at the peak of mobilisation, wherein the population of HSPCs is cultured ex vivo prior to administration and an RNA polynucleotide encoding one or more engraftment enhancer is introduced into the HSPCs prior to administration,

wherein the subject does not undergo chemotherapy or radiotherapy conditioning before administration of the HSPCs.

[0387] In some embodiments, the method of the present invention comprises:

[0388] (a) (i) administering a G-CSF for about 7 days; (ii) administering a CXCR4 antagonist for about 2 days; and (iii) optionally, administering a VLA-4 antagonist for about 2 days to a subject to mobilise endogenous HSPCs from the subject's bone marrow; and

[0389] (b) administering a population of HSPCs to the subject at the peak of mobilisation, wherein the population of HSPCs is cultured ex vivo prior to administration and an RNA polynucleotide encoding one or more engraftment enhancer selected from CXCR4 (or a fragment or variant thereof), CD47 (or a fragment or variant thereof), ITGA4 (or a fragment or variant thereof), and KIT (or a fragment or variant thereof) is introduced into the HSPCs prior to administration,

wherein the subject does not undergo chemotherapy or radiotherapy conditioning before administration of the HSPCs.

[0390] In some embodiments, the method of the present invention comprises:

[0391] (a) (i) administering a G-CSF for about 7 days; (ii) administering a CXCR4 antagonist for about 2 days; and (iii) optionally, administering a VLA-4 antagonist for about 2 days to a subject to mobilise endogenous HSPCs from the subject's bone marrow; and

[0392] (b) administering a population of autologous genetically engineered HSPCs to the subject at the peak of mobilisation, wherein the population of HSPCs is cultured ex vivo prior to administration and an RNA polynucleotide encoding one or more engraftment enhancer selected from CXCR4 (or a fragment or variant thereof), CD47 (or a fragment or variant thereof), ITGA4 (or a fragment or variant thereof), and KIT (or a fragment or variant thereof) is introduced into the HSPCs prior to administration,

wherein the subject does not undergo chemotherapy or radiotherapy conditioning before administration of the HSPCs.

Engraftment Enhancers

[0393] In one aspect, the present invention provides use of one or more engraftment enhancer for increasing engraftment by haematopoietic stem and/or progenitor cells

(HSPCs). In one embodiment, the use is an ex vivo use. In one embodiment, the use is an in vitro use.

[0394] In one aspect, the present invention provides a method for increasing engraftment by haematopoietic stem and/or progenitor cells (HSPCs), wherein the method comprises the step of genetically engineering the HSPCs to express one or more engraftment enhancer. In one embodiment, the method is an ex vivo method. In one embodiment, the method is an in vitro method.

[0395] In one aspect, the present invention provides a population of genetically engineered haematopoietic stem and/or progenitor cells (HSPCs) obtainable or obtained by the method of the present invention.

[0396] In one aspect, the present invention provides a population of genetically engineered haematopoietic stem and/or progenitor cells (HSPCs), wherein the HSPCs are genetically engineered to express one or more engraftment enhancer.

[0397] In one aspect, the present invention provides a method for haematopoietic stem and/or progenitor cell (HSPC) transplantation comprising the steps:

[0398] (a) providing a population of HSPCs which are genetically engineered to express one or more engraftment enhancer; and

[0399] (b) administering the HSPCs to a subject.

[0400] An "engraftment enhancer" may refer to any agent that enhances the ability of exogenous HSPCs to engraft in a subject's bone marrow. The increased engraftment may be in comparison to HSPCs that have not been genetically engineered to express the engraftment enhancer. Engraftment may be increased, for example, by at least about 10%, at least about 20%, at least about 30%, at least about 40%, at least about 50%, at least about 75%, at least about 100%, at least about 200% or at least about 500% in comparison to HSPCs that have not been genetically engineered to express the engraftment enhancer. This ability may be determined by any suitable assay. For example, using a transmigration assay (see e.g. Henschler, R. and Richter, R., 2019. In Stem Cell Mobilization (pp. 59-70). Humana, New York, NY) or by transplanting the exogenous HSPCs and determining the extent of engraftment following transplantation.

[0401] In some embodiments, the one or more engraftment enhancer comprises or consists of CXCR4 (or a fragment or variant thereof), CD47 (or a fragment or variant thereof), ITGA4 (or a fragment or variant thereof), and/or KIT (or a fragment or variant thereof).

[0402] In some embodiments, the one or more engraftment enhancer comprises two or more engraftment enhancers. In some embodiments, the one or more engraftment enhancer comprises three or more engraftment enhancers. In some embodiments, the one or more engraftment enhancer comprises four or more engraftment enhancers. In some embodiments, the one or more engraftment enhancer consists of one engraftment enhancer. In some embodiments, the one or more engraftment enhancer consists of two engraftment enhancers. In some embodiments, the one or more engraftment enhancer consists of three engraftment enhancers. In some embodiments, the one or more engraftment enhancer consists of four engraftment enhancers.

[0403] In some embodiments, the one or more engraftment enhancer comprises or consists of CXCR4 (or a fragment or variant thereof) and CD47 (or a fragment or variant thereof). In some embodiments, the one or more engraftment enhancer comprises or consists of CXCR4 (or

a fragment or variant thereof) and ITGA4 (or a fragment or variant thereof). In some embodiments, the one or more engraftment enhancer comprises or consists of CXCR4 (or a fragment or variant thereof) and KIT (or a fragment or variant thereof). In some embodiments, the one or more engraftment enhancer comprises or consists of ITGA4 (or a fragment or variant thereof) and CD47 (or a fragment or variant thereof). In some embodiments, the one or more engraftment enhancer comprises or consists of KIT (or a fragment or variant thereof). In some embodiments, the one or more engraftment enhancer comprises or consists of ITGA4 (or a fragment or variant thereof) and KIT (or a fragment or variant thereof).

[0404] In some embodiments, the one or more engraftment enhancer comprises or consists of CXCR4 (or a fragment or variant thereof), ITGA4 (or a fragment or variant thereof), and KIT (or a fragment or variant thereof). In some embodiments, the one or more engraftment enhancer comprises or consists of CXCR4 (or a fragment or variant thereof), ITGA4 (or a fragment or variant thereof), and CD47 (or a fragment or variant thereof). In some embodiments, the one or more engraftment enhancer comprises or consists of CXCR4 (or a fragment or variant thereof), KIT (or a fragment or variant thereof), and CD47 (or a fragment or variant thereof).

[0405] In some embodiments, the one or more engraftment enhancer comprises or consists of CXCR4 (or a fragment or variant thereof), CD47 (or a fragment or variant thereof), ITGA4 (or a fragment or variant thereof), and KIT (or a fragment or variant thereof).

[0406] In one embodiment, the engraftment enhancer is a fusion with a destabilising domain protein. In one embodiment, each engraftment enhancer is individually a fusion with destabilising domain proteins. Use of an example destabilising domain strategy is disclosed in Banaszynski et al. (2012) Cell, 126(5): 995-1004. Typically, the engraftment enhancer is operably linked to a destabilising domain protein (DD) that is tuneable through the use of a stabilising agent (e.g. a small molecule). For example, the destabilising domain may be stable when bound to its stabilising agent, but may cause the fusion protein to be unstable in the absence thereof. For example, the engraftment enhancer may be operably linked to a destabilising domain protein and delivered using a vector. The engraftment enhancer in this form may be normally unstable, but expression of the engraftment enhancer may then be induced (e.g. in vivo) for a time period of interest by the delivery of a stabilising agent.

C-X-C Chemokine Receptor Type 4 (CXCR4)

[0407] In one aspect, the present invention provides use of CXCR4 (or a fragment or variant thereof) for increasing engraftment by haematopoietic stem and/or progenitor cells (HSPCs).

[0408] In one aspect, the present invention provides a method for increasing engraftment by haematopoietic stem and/or progenitor cells (HSPCs), wherein the method comprises the step of genetically engineering the HSPCs to express CXCR4 (or a fragment or variant thereof).

[0409] In one aspect, the present invention provides a population of genetically engineered haematopoietic stem

and/or progenitor cells (HSPCs), wherein the HSPCs are genetically engineered to express CXCR4 (or a fragment or variant thereof).

[0410] In one aspect, the present invention provides a method for haematopoietic stem and/or progenitor cell (HSPC) transplantation comprising the steps:

[0411] (a) providing a population of HSPCs which are genetically engineered to express CXCR4 (or a fragment or variant thereof); and

[0412] (b) administering the HSPCs to a subject.

[0413] C-X-C chemokine receptor type 4 (CXCR4) is a receptor expressed on the surface of HSPCs. The interaction of CXCR4 with CXCL12 is one of the major mechanisms that directs migration to the bone marrow. CXCR4 may also known as fusin or CD184. Mouse and human CXCR4 have been cloned and show about 91% overall amino acid identity (see e.g. Heesen, M., et al., 1996. The Journal of Immunology, 157(12), pp. 5455-5460).

[0414] In a preferred embodiment, the CXCR4 is human CXCR4. A human CXCR4 may have an amino acid sequence of UniProtKB P61073. In some embodiments, the CXCR4 is isoform I.

[0415] Exemplary CXCR4 polypeptides are provided by SEQ ID NOs: 1 and 2. In one embodiment, the CXCR4 comprises or consists of an amino acid sequence that has at least 70%, at least 80%, at least 85%, at least 90%, at least 95%, at least 96%, at least 97%, at least 98%, at least 99% or 100% identity to SEQ ID NO: 1 or 2, preferably wherein the amino acid sequence substantially retains the engraftment enhancing activity of the protein represented by SEQ ID NO: 1 or 2, respectively.

[0416] In one embodiment, the CXCR4 comprises or consists of an amino acid sequence that has at least 70%, at least 80%, at least 85%, at least 90%, at least 95%, at least 96%, at least 97%, at least 98%, at least 99% or 100% identity to SEQ ID NO: 2, preferably wherein the amino acid sequence substantially retains the engraftment enhancing activity of the protein represented by SEQ ID NO: 2.

[0417] In one embodiment, the amino acid sequence of CXCR4 isoform II is:

Exemplary CXCR4 isoform II
(SEQ ID NO: 1)
MSIPLPLLQIYTSNDNYTEEMSGDYDSMKEPCFREENANENKIFLPTIYS
IIFLTGIVGNGLVILVMGYQKKLRSMTDKYRLHLSVADLLFVITLPPFWAV
DAVANWYFGNFLCKAVHVIYTVNLYSSVLILAFISLDRYLAIVHATNSQR
PRKLLAEKVYVGVWIPALLLTIPDFIFANVSEADDRYICDRFPNDLWV
VVFQFQHIMVGLILPGIVILSCYCIISKLSSHKGHQKRKALKTTVILIL
AFFACWLPPYYIGISIDSFILLEIIKQGCFFENTVHKWISITEALAFFHCC
LNPILYAFGLGAKFKTSAQHALLTSVSRGSSLLKLSKGRGGHSSVSTESSES
SSPHSS

[0418] In one embodiment, the amino acid sequence of CXCR4 isoform I is:

Exemplary CXCR4 isoform I
(SEQ ID NO: 2)
MEGISIYTSNDNYTEEMSGDYDSMKEPCFREENANENKIFLPTIYSIIFL
TGIVGNGLVILVMGYQKKLRSMTDKYRLHLSVADLLFVITLPPFWAVDAVA
NWYFGNFLCKAVHVIYTVNLYSSVLILAFISLDRYLAIVHATNSQRPRKL

-continued

LAEKVVYVGVWIPALLLTIPDFIFANVSEADRYICDRFYPNDLWVVVFQ
 FQHIMVGLILPGIVILSCYCIISKLSSHKGHQKRKALKTTVILILAFFA
 CWLPYYIGISIDSFILLEIKQGEFENTVHKWISITEALAFFHCCLNPI
 LYAFLGAKFKTSAQHALTSVSRGSSLKILSKGRGGHSSVSTESSSSFH
 SS

[0419] In a preferred embodiment, the nucleotide sequence encoding the CXCR4 is codon optimised.

[0420] In one embodiment, the CXCR4 is encoded by a nucleotide sequence that has at least 70%, at least 80%, at least 85%, at least 90%, at least 95%, at least 96%, at least 97%, at least 98%, at least 99% or 100% identity to any of SEQ ID NOs: 10-11 or 12-13, preferably wherein the protein encoded by the nucleotide sequence substantially retains the engraftment enhancing activity of the protein represented by SEQ ID NO: 1 or 2, respectively.

[0421] In one embodiment, the CXCR4 is encoded by a nucleotide sequence that has at least 70%, at least 80%, at least 85%, at least 90%, at least 95%, at least 96%, at least 97%, at least 98%, at least 99% or 100% identity to SEQ ID NO: 12, preferably wherein the protein encoded by the nucleotide sequence substantially retains the engraftment enhancing activity of the protein represented by SEQ ID NO: 2.

[0422] In one embodiment, the nucleotide sequence encoding CXCR4 isoform II is:

Exemplary nucleotide sequence encoding CXCR4
 isoform II (SEQ ID NO: 10)
 ATGTCTATTCTCTGCCCTGCTGCAGATCTACACCAGCGACAACATACAC
 CGAGGAAATGGGCAGCGCGACTACGACAGCATGAAGAACCTGCTTCC
 GGGAAGAGAACGCCAACTTCAACAAGATCTTCTGCCACAATCTACAGC
 ATCATCTTTCTGACCGGCATCGTGGGCAACGGACTCGTGATCCTCGTGAT
 GGGCTACCAGAAAAAGCTGCGGAGCATGACCGACAAGTACCGGCTGCACC
 TGAGCGTGGCCGACCTGCTGTTCTGATCACCTGCCTTTCTGGGCCGTG
 GACGCCGTGGCAATTGGTACTTCGGCAACTTCTGTGCAAGGCCGTGCA
 CGTGATCTACACAGTGAACCTGTACAGCAGCGTGCTGATCCTGGCCTTCA
 TCAGCCTGGACAGATACCTGGCCATCGTGACGCCACCAACAGCCAGCGG
 CCTAGAAAGCTGCTGGCCGAGAAGGTGGTGTACGTGGGCGTGGATTCC
 CGCCCTGCTGCTGACCATCCCCGACTTCATCTTCGCCAACGTGTCGAGG
 CCGACGACCGGTACATCTGCGACCGGTTCTACCCCAACGACCTGTGGGTG
 GTGGTGTTCAGTTCCAGCACATCATGGTGGGACTGATCCTGCCTGGCAT
 CGTGATTCTGAGCTGCTACTGCATCATCATCAGCAAGCTGAGCCACAGCA
 AGGGCCACCAGAAGCGAAGGCCCTGAAAACCACCGTGATCCTGATTCTG
 GCTTTCTTCGCTGCTGGCTGCCCTACTACATCGGCATCAGCATCGACAG
 CTTTATCTGCTGGAAATCATCAAGCAGGGCTGCGAGTTCGAGAACACCG
 TGCACAAGTGGATCAGCATTACCGAGGCCCTGGCCTTTTCCACTGCTGC

-continued

CTGAACCCCTATCCTGTACGCCTTCTGGGCGCCAAGTTCAAGACCTCTGC
 CCAGCACGCCCTGACCAGCGTGTCCAGAGGAAGCAGCCTGAAGATCTTGA
 GCAAGGGCAAGAGAGGCGGCCACAGCTCCGTGTCTACAGAGAGCGAGAGC
 AGCAGCTTCCACAGCAGC

[0423] In another embodiment, the nucleotide sequence encoding CXCR4 isoform II is:

Exemplary nucleotide sequence encoding CXCR4
 isoform II (SEQ ID NO: 11)
 ATGTCCATTCTTTGCCCTCTTTTGCAGATATACACTTCAGATAACTACAC
 CGAGGAAATGGGCTCAGGGGACTATGACTCCATGAAGAACCTGTTTCC
 GTGAAGAAAATGCTAATTTCAATAAAATCTTCTGCCACCACATCTACTCC
 ATCATCTTCTTAAGTGGCATTGTGGGCAATGGATTGGTCATCCTGGTCAT
 GGGTTACCAGAAGAACTGAGAAGCATGACGGACAAGTACAGGCTGCACC
 TGTGAGTGGCCGACCTCTCTTTGTCATCAGCTTCCCTTCTGGGCGAGTT
 GATGCCGTGGCAAACTGGTACTTTGGGAACCTTCTATGCAAGGCGAGTCCA
 TGTGATCTACACAGTCAACCTCTACAGCAGTGTCTCATCCTGGCCTTCA
 TCAGTCTGGACCGCTACCTGGCCATCGTCCAGCCACCAACAGTCAAGAG
 CCAAGGAAGCTGTTGGCTGAAAAGGTGGTCTATGTTGGCGTCTGGATCCC
 TGCCCTCCTGCTGACTATTCCCGACTTCATCTTTGCCAACGTCAAGTGGG
 CAGATGACAGATATATCTGTGACCGCTTCTACCCCAATGACTTGTGGGTG
 GTTGTGTTCCAGTTTCAGCACATCATGGTTGGCCTTATCCTGCCTGGTAT
 TGTGATCCTGTCTGCTATTGCAATATCATCTCCAAGCTGTCACTTCCA
 AGGGCCACCAGAAGCGCAAGGCCCTCAAGACCACAGTCACTCTCATCTCTG
 GCTTTCTTCGCTGTTGGCTGCCTTACTACATTTGGGATCAGCATCGACTC
 CTTTATCCTCTGGAAATCATCAAGCAAGGGTGTGAGTTTGAAGAACTG
 TGCACAAGTGGATTTCATCACCAGGCGCTAGCTTTCTTCCACTGTTGT
 CTGAACCCCATCCTCTATGCTTTCTTGGAGCCAAATTTAAACCTCTGCT
 CCAGCACGCACTCACCTCTGTGAGCAGAGGGTCCAGCCTCAAGATCCTCT
 CCAAGGAAGCGAGGTGGACATTCATCTGTTTCCACTGAGTCTGAGTCT
 TCAAGTTTTCACTCCAGC

[0424] In another embodiment, the nucleotide sequence encoding CXCR4 isoform I is:

Exemplary nucleotide sequence encoding CXCR4
 isoform I (SEQ ID NO: 12)
 ATGGAAGGCATCAGCATCTACACCAGCGACAACCTACCCGAGGAAATGGG
 CAGCGGCGACTACGACAGCATGAAGGAACCTGCTTCCGGGAAGAGAAGC
 CCAACTTCAACAAGATCTTCTGCCCAATCTACAGCATCATCTTTCTG
 ACCGGCATCGTGGGCAACGACTCGTGATCCTCGTGATGGGCTACCAGAA
 AAGCTGCGGAGCATGACCGACAAGTACCGGCTGCACCTGAGCGTGGCCG

-continued

ACCTGCTGTTCTGTGATCACCCTGCCTTTCTGGGCGTGGACGCCGTGGCC
 AATTGGTACTTCGGCAACTTCTGTGCAAGGCCGTGCACGTGATCTACAC
 AGTGAACCTGTACAGCAGCGTGTGATCCTGGCCTTCATCAGCCTGGACA
 GATACCTGGCCATCGTGACGCCACCAACAGCCAGCGGCTTAGAAAGCTG
 CTGGCCGAGAAGTGGTGTACGTGGGCGTGTGGATTCCGCCCTGCTGCT
 GACCATCCCCGACTTCATCTTCGCCAACGTGTCGAGGCCGACGACCGGT
 ACATCTGCGACCGGTTCTACCCCAACGACCTGTGGGTGGTGGTGTCCAG
 TTCCAGCACATCATGGTGGGACTGATCTGCCTGGCATCGTGATTCTGAG
 CTGCTACTGCATCATCATCAGCAAGCTGAGCCACAGCAAGGGCCACCAGA
 AGCGGAAGGCCCTGAAAACCACCGTGATCCTGATTCTGGCTTTCTTCGCC
 TGCTGGCTGCCCTACTACATCGGCATCAGCATCGACAGCTTCATCCTGCT
 GGAAATCATCAAGCAGGGCTGCGAGTTCGAGAACACCGTGCAAGTGA
 TCAGCATTACCGAGGCCCTGGCCTTTTCCACTGCTGCCTGAACCTATC
 CTGTACGCCCTTCTGGGCGCAAGTCAAGACCTCTGCCAGCAGCCCT
 GACCAAGCTGTCCAGAGGAAGCAGCCTGAAGATCCTGAGCAAGGGCAAGA
 GAGGCGGCCACAGCTCCGTGTCTACAGAGAGCGAGAGCAGCAGCTTCCAC
 AGCAGC

[0425] In another embodiment, the nucleotide sequence encoding CXCR4 isoform I is:

Exemplary nucleotide sequence encoding CXCR4
 isoform I (SEQ ID NO: 13)
 ATGGAGGGATCAGTATATACACTTCAGATAACTACCGAGGAAATGGG
 CTCAGGGGACTATGACTCCATGAAGGAACCTGTTTCCGTGAAGAAATG
 CTAATTTCAATAAAATCTTCCTGCCACCATCTACTCCATCATCTTCTTA
 ACTGGCATTGTGGGCAATGGATTGGTCATCCTGGTCATGGGTTACCAGAA
 GAAACTGAGAAGCATGACGGACAAGTACAGGCTGCACCTGTCTAGTGGCCG
 ACCTCCTCTTTGTATCAGCTTCCCTTCTGGGAGTTGATGCCGTGGCA
 AACTGGTACTTTGGGAAGTTCCTATGCAAGGCAGTCCATGTCATCTACAC
 AGTCAACCTCTACAGCAGTGTCTCATCTGGCCTTCATCAGTCTGGACC
 GCTACCTGGCCATCGTCCAGCCACCAACAGTCAGAGGCCAAGGAAGCTG
 TTGGCTGAAAAGTGGTCTATGTTGGCGTCTGGATCCCTGCCCTCCTGCT
 GACTATTTCCGACTTCATCTTTGCCAACGTGAGTGGCAGATGACAGAT
 ATATCTGTGACCGCTTCTACCCCAATGACTTGTGGGTGGTGTGTCCAG
 TTTCCAGCACATCATGGTTGGCCTTATCCTGCCTGGTATTGTCATCCTGTC
 CTGCTATTGCATTATCATCTCCAAGCTGTACACTCCAAGGGCCACCAGA
 AGCGCAAGGCCCTCAAGACCACAGTCATCCTCATCTGGCTTTCTTCGCC
 TGTGGCTGCCTTACTACATTGGGATCAGCATCGACTCCTTCATCCTCCT
 GGAAATCATCAAGCAAGGGTGTGAGTTTGAGAACTGTGCAAGTGA
 TTTCCATCACCGAGGCCCTAGCTTTCTTCCACTGTTGTCTGAACCCCATC

-continued

CTCTATGCTTTTCCTGGAGCCAAATTTAAACCTCTGCCAGCAGCACT
 CACCTCTGTGAGCAGAGGGTCCAGCCTCAAGATCTCTCCAAGGAAAGC
 GAGGTGGACATTCTCTGTTTCCACTGAGTCTGAGTCTTCAAGTTTTAC
 TCCAGC

[0426] A person skilled in the art would be able to generate variants and/or fragments retaining the engraftment enhancing activity of CXCR4 based on conservative substitutions and/or the known structural and functional features of CXCR4. These are described, for instance in Qin, L., et al., 2015. Science, 347(6226), pp. 1117-1122.

CXCR4 Fragments

[0427] In one embodiment, the CXCR4 is a truncated CXCR4. In one embodiment, the CXCR4 is a CXCR4 Whim isoform (Kawai T. et al. (2005) Experimental Hematology; the CXCR4 Whim isoform I may be naturally expressed in subjects with Whim syndrome). In one embodiment, the CXCR4 is a CXCR4 Whim isoform 1. In one embodiment, the CXCR4 is a CXCR4 Whim isoform II. CXCR4 Whim isoform I may also be referred to as a CXCR4 R334X mutant.

[0428] Exemplary truncated CXCR4 polypeptides are provided by SEQ ID NOs: 3 and 4. In one embodiment, the CXCR4 comprises or consists of an amino acid sequence that has at least 70%, at least 80%, at least 85%, at least 90%, at least 95%, at least 96%, at least 97%, at least 98%, at least 99% or 100% identity to SEQ ID NO: 3 or 4, preferably wherein the amino acid sequence substantially retains the engraftment enhancing activity of the protein represented by SEQ ID NO: 3 or 4, respectively.

[0429] In one embodiment, the CXCR4 comprises or consists of an amino acid sequence that has at least 70%, at least 80%, at least 85%, at least 90%, at least 95%, at least 96%, at least 97%, at least 98%, at least 99% or 100% identity to SEQ ID NO: 4, preferably wherein the amino acid sequence substantially retains the engraftment enhancing activity of the protein represented by SEQ ID NO: 4.

[0430] An example amino acid sequence of CXCR4 Whim isoform II is:

Exemplary CXCR4 Whim isoform II (SEQ ID NO: 3)
 MSIPLPLLQIYTSNDNYTEEMSGDYDSMKPECFREENANFNKIFLPTIYS
 IIFLTGIVGNGLVILVMGYQKKLRSMTDKYRLHLSVADLLFVITLPFWAV
 DAVANWYFGNFLCKAVHYIYTVNLYSSVLILAFISLDRLAIVHATNSQR
 PRKLLAEKVYVGVWIPALLLTIPDFIFANVSEADDRYICDRFPNDLWV
 VVFPQFHIMVGLILPGIVILSCYCIISKLSHSGKHQKRKALKTTVILIL
 AFFACWLPPYIGISIDSFILLEIKQGCDEFENTVHKWISITEALAFFHCC
 LNPILYAFLGAKFKTSAQHALLTSVSRGSSSLKILSKGK

[0431] An example amino acid sequence of CXCR4 Whim isoform I is:

Exemplary CXCR4 Whim isoform I (SEQ ID NO: 4)
 MEGISYITSDNYTEEMSGDYDSMKPECFREENANFNKIFLPTIYSIIFL
 TGIVGNGLVILVMGYQKKLRSMTDKYRLHLSVADLLFVITLPFWAVDAVA

-continued

NWYFNGFLCKAVHVIYTVNLYSSVLILAFISLDRYLAIVHATNSQRPRL
 LAEKVVYVGVWIPALLLTIPDFIFANVSEADDRYICDRFYPNDLWVVVFQ
 FQHIMVGLILPGIVILSCYCIISKLSHSKGHQKRKALKTTVILILAPFA
 CWLPYYIGISIDSFILLEIKQGCEFENTVHKWISITEALAFFHCCLNPI
 LYAFLGAKFKTSAQHALLTSVSRGSSLKILSKGK

[0432] In one embodiment, the CXCR4 is encoded by a nucleotide sequence that has at least 70%, at least 80%, at least 85%, at least 90%, at least 95%, at least 96%, at least 97%, at least 98%, at least 99% or 100% identity to any of SEQ ID NOs: 14-15 or 16-17, preferably wherein the protein encoded by the nucleotide sequence substantially retains the engraftment enhancing activity of the protein represented by SEQ ID NO: 3 or 4, respectively.

[0433] In one embodiment, the CXCR4 is encoded by a nucleotide sequence that has at least 70%, at least 80%, at least 85%, at least 90%, at least 95%, at least 96%, at least 97%, at least 98%, at least 99% or 100% identity to SEQ ID NO: 17, preferably wherein the protein encoded by the nucleotide sequence substantially retains the engraftment enhancing activity of the protein represented by SEQ ID NO: 4.

[0434] An example nucleotide sequence encoding CXCR4 Whim isoform II is:

Exemplary nucleotide sequence encoding CXCR4 Whim isoform II

(SEQ ID NO: 14)

ATGTCATTCCTTTGCCCTTTTGCAGATATACACTTCAGATAACTACAC
 CGAGGAAATGGGCTCAGGGACTATGACTCCATGAAGAACCTGTTTCC
 GTGAAGAAATGCTAATTTCAATAAAATCTTCTGCCACCATCTACTCC
 ATCATCTTCTTAATGGCATTGTGGCAATGGATTGGTCATCCTGGTCAT
 GGGTTACCAGAAGAACTGAGAAGCATGACGGACAAGTACAGGCTGCACC
 TGTCAGTGGCCGACCTCCTTTGTGCATCAGCTTCCCTTCTGGGCAGTT
 GATGCCGTGGCAAACTGGTACTTTGGGAACCTTCCATGCAAGGCAGTCCA
 TGTCATCTACACAGTCAACCTCTACAGCAGTGTCTCATCTTGGCCTTCA
 TCAGTCTGGACCGCTACCTGGCCATCGTCCACGCCACCAACAGTCAGAGG
 CCAAGGAAGCTGTTGGCTGAAAAGGTGGTCTATGTTGGCGTCTGGATCCC
 TGCCCTCCTGCTGACTATTCCCGACTTCATCTTTGCCAACGTCACTGAGG
 CAGATGACAGATATATCTGTGACCGCTTCTACCCCAATGACTTGTGGGTG
 GTTGTGTTCCAGTTTCAGCACATCATGGTTGGCCTTATCCTGCCTGGTAT
 TGTATCCTGTCTGCTATTGCATTATCATCTCCAAGCTGTACACTCCA
 AGGGCCACCAGAAGCGCAAGGCCCTCAAGACCACAGTCATCTCATCTGT
 GCTTTCTTCGCCTGTTGGCTGCCTTACTACATTGGGATCAGCATCGACTC
 CTTATCCTCCTGGAAATCATCAAGCAAGGTGTGAGTTTGAGAACACTG
 TGACAAGTGGATTTCATCACCGAGGCCCTAGCTTTCTTCACTGTTGT
 CTGAACCCCATCTCTATGCTTTCTTGGAGCCAAATTTAAACCTCTGC
 CCAGCAGCACTCACTCTGTGAGCAGAGGTCCAGCCTCAAGATCCTCT

-continued

CCAAAGGAAAGTGAGGTGGACATTCATCTGTTTCCACTGAGTCTGAGTCT
 TCAAGTTTTCACTCCAGC

[0435] Another example nucleotide sequence encoding CXCR4 Whim isoform II is:

Exemplary nucleotide sequence encoding CXCR4 Whim isoform II

(SEQ ID NO: 15)

ATGTCATTCCTCTGCCCTGCTGCAGATCTACACCAGCGACAACCTACAC
 CGAGGAAATGGGCGAGCGCGACTACGACAGCATGAAGGAACCTGCTTCC
 GGGAGAGAACGCCAATTCAACAAGATCTTCTGCCCAACATCTACAGC
 ATCATCTTTCTGACCGGCATCGTGGGCAACGGACTCGTGATCCTCGTGAT
 GGGCTACCAGAAAAAGCTGCGGAGCATGACCGACAAGTACCGGCTGCACC
 TGAGCGTGGCCGACCTGCTGTTCGTGATCACCTGCCTTTCTGGGCCGTG
 GACGCCGTGGCCAATTGGTACTTCGGCAACTTCTGTGCAAGGCCGTGCA
 CGTGATCTACACAGTGAACCTGTACAGCAGCGTGTGATCCTGGCCTTCA
 TCAGCCTGGACAGATACCTGGCCATCGTGCACGCCACCAACAGCCAGCGG
 CCTAGAAAGCTGCTGGCCGAGAAGGTGGTGTACGTGGCGCTGTGGATTCC
 CGCCCTGCTGTGACCATCCCCGACTTCATCTTCGCCAACGTGTCCGAGG
 CCGACGACCGGTACATCTGCGACCGGTTCTACCCCAACGACCTGTGGGTG
 GTGGTGTTCAGTTCCAGCACATCATGGTGGGACTGATCTGCCTGGCAT
 CGTGATTCTGAGCTGCTACTGCATCATCATCAGCAAGCTGAGCCACAGCA
 AGGGCCACCAGAAGCGGAAGGCCCTGAAAACCAACCGTGATCCTGATTCTG
 GCTTCTTCGCCTGCTGGCTGCCCTACTACATCGGCATCAGCATCGACAG
 CTTTATCCTGTGGAATCATCAAGCAGGGCTGCGAGTTGAGAACACCG
 TGCACAAGTGGATCAGCATTACCGAGGCCCTGGCCTTTTCCACTGCTGC
 CTGAACCCATCTCTGTACGCCTTCTGGGGCCCAAGTTCAAGACCTCTGC
 CCAGCAGCCCTGACCGAGCGTGTCCAGAGGAAGCAGCCTGAAGATCCTGA
 GCAAGGGCAAGTGAGGCGGCCACAGCTCCGTGTCTACAGAGAGCGAGAGC
 AGCAGCTTCCACAGCAGC

[0436] An example nucleotide sequence encoding CXCR4 Whim isoform I is:

Exemplary nucleotide sequence encoding CXCR4 Whim isoform I

(SEQ ID NO: 16)

ATGGAGGGGATCAGTATATACACTTCAGATAACTACCCGAGGAAATGGG
 CTCAGGGGACTATGACTCCATGAAGGAACCTGTTTCCGTGAAGAAAATG
 CTAATTTCAATAAAATCTTCTGCCCACTCTACTCCATCATCTTCTTA
 ACTGGCATTGTGGCAATGGATTGGTCATCTGGTCATGGGTTACCAGAA
 GAAACTGAGAAGCATGACGGACAAGTACAGGCTGCACCTGTCACTGGCCG
 ACCTCCTCTTGTGATCAGCCTTCCCTTCTGGGCAGTTGATGCCGTGGCA
 AACTGGTACTTTGGGAACCTCCTATGCAAGGCAGTCCATGTCTATAC

-continued

AGTCAACCTCTACAGCAGTGTCTCATCTGGCCTTCATCAGTCTGGACC
 GCTACCTGGCCATCGTCCACGCCAACAGTCAGAGGCCAAGGAAGCTG
 TTGGCTGAAAAGTGGTCTATGTTGGCGTCTGGATCCCTGCCCTCCTGCT
 GACTATTCGCCACTTCATCTTTGCCAACGTGAGGAGATGACAGAT
 ATATCTGTGACCGCTTCTACCCCAATGACTTGTGGGTGGTGTGTCCAG
 TTTCAGCACATCATGGTTGGCCTTATCTGCCTGGTATTGTCATCTCTGTC
 CTGCTATTGCATTATCATCTCCAAGCTGTCACACTCCAAGGCCACCAGA
 AGCGCAAGGCCCTCAAGACCACAGTCATCCTCATCTGGCTTTCTTCGCC
 TGTGGCTGCCTTACTACATTGGGATCAGCATCGACTCCTTCATCTCTCT
 GGAAATCATCAAGCAAGGTGTGAGTTTGAGAACACTGTGCACAAGTGGA
 TTTCCATCACCGAGGCCCTAGCTTTCTTCCACTGTTGTCTGAACCCATC
 CTCTATGCTTTCTTGGAGCCAAATTTAAACCTCTGCCAGCAGCAGT
 CACCTCTGTGAGCAGAGGTCCAGCCTCAAGATCTCTCCAAGGAAAGT
 GAGGTGGACATTATCTGTTTCCACTGAGTCTGAGTCTTCAAGTTTTCAC
 TCCAGC

[0437] Another example nucleotide sequence encoding CXCR4 Whim isoform I is:

Exemplary nucleotide sequence encoding CXCR4 Whim
 isoform I (SEQ ID NO: 17)
 ATGGAAGGCATCAGCATCTACACCAGCGACAACCTACACCGAGGAAATGGG
 CAGCGGGCAGCTACGACAGCATGAAGGAACCTGCTTCCGGGAAGAGAAGC
 CCAACTTCAACAAGATCTTCTGCCACAATCTACAGCATCATCTTTCTG
 ACCGCATCGTGGGCAACGGACTCGTGATCCTCGTGATGGGCTACCAGAA
 AAAGCTGCGGAGCATGACCGACAAGTACCGGCTGCACCTGAGCGTGGCCG
 ACCTGCTGTTCTGTATCACCTTGCTTTCTGGGCGTGGACGCCGTGGCC
 AATTGGTACTTCGGCAACTTCTGTGCAAGGCCGTGCACGTGATCTACAC
 AGTGAACCTGTACAGCAGCGTCTGATCCTGGCCTTCATCAGCCTGGACA
 GATACCTGGCCATCGTGACGCCACCAACAGCCAGCGGCTAGAAAGCTG
 CTGGCCGAGAAGTGGTGTACGTGGGCGTGTGGATTCCCGCCCTGCTGCT
 GACCATCCCCGACTTCATCTTCGCCAACGTGTCGAGGCCGACGACCGGT
 ACATCTGCGACCGGTTCTACCCCAACGACCTGTGGGTGGTGGTGTCCAG
 TTCCAGCACATCATGGTGGGACTGATCCTGCCTGGCATCGTGATTCTGAG
 CTGCTACTGCATCATCATCAGCAAGCTGAGCCACAGCAAGGGCCACCAGA
 AGCGGAAGGCCCTGAAAACCACCGTGATCCTGATTCTGGCTTTCTTCGCC
 TGCTGGCTGCCCTACTACATCGGCATCAGCATCGACAGCTTCATCTCTGCT
 GGAAATCATCAAGCAGGCTGCGAGTTTCGAGAACACCGTGCAAGTGGA
 TCAGCATTACCGAGGCCCTGGCCTTTTCCACTGCTGCTGAACCTATC
 CTGTACGCCCTTCTGGGCGCAAGTTCAAGACCTCTGCCAGCAGCCCT
 GACCAGCGTGTCCAGAGGAAGCAGCCTGAAGATCTGAGCAAGGGCAAGT

-continued

GAGGCGGCCACAGCTCCGTGTCTACAGAGCGAGAGCAGCAGCTTCCAC
 AGCAGC

CXCR4 Variants

[0438] In one aspect, the present invention provides use of a CXCR4 variant (or fragment thereof) for increasing engraftment by haematopoietic stem and/or progenitor cells (HSPCs).

[0439] In one aspect, the present invention provides a method for increasing engraftment by haematopoietic stem and/or progenitor cells (HSPCs), wherein the method comprises the step of genetically engineering the HSPCs to express a CXCR4 variant (or fragment thereof).

[0440] In one aspect, the present invention provides a population of genetically engineered haematopoietic stem and/or progenitor cells (HSPCs), wherein the HSPCs are genetically engineered to express a CXCR4 variant (or fragment thereof).

[0441] In one aspect, the present invention provides a method for haematopoietic stem and/or progenitor cell (HSPC) transplantation comprising the steps:

[0442] (a) providing a population of HSPCs which are genetically engineered to express a CXCR4 variant (or fragment thereof); and

[0443] (b) administering the HSPCs to a subject.

[0444] The CXCR4 variant may be one which enhances engraftment to the same or a greater level than CXCR4. This may be determined by any suitable assay. For example, using a transmigration assay or by transplanting genetically engineered HSPCs and determining the extent of engraftment following transplantation.

[0445] The CXCR4 variant may have a maintained or increased response to SDF-1 compared to CXCR4. This may be determined by any suitable assay. For example, by using a calcium mobilisation assay, an antibody binding assay, or a PCR-based virus entry assay e.g. as described in Hatse, S., et al., 2001. Molecular pharmacology, 60(1), pp. 164-173. In some embodiments, the CXCR4 variant has the same or greater binding affinity for SDF-1 compared to CXCR4. This may be determined by any suitable assay. For example, using the binding assay described in e.g. Zhang, W. B., et al., 2002. Journal of Biological Chemistry, 277(27), pp. 24515-24521.

[0446] In some embodiments, the CXCR4 variant has increased resistance to a CXCR4 antagonist compared to CXCR4. In some embodiments, the CXCR4 variant has increased resistance to AMD3100 compared to CXCR4. In some embodiments, the CXCR4 variant has a reduced binding affinity for a CXCR4 antagonist (e.g. AMD3100) compared to CXCR4. This may be determined by any suitable assay. For example, using a transmigration assay in the absence or presence of a CXCR4 antagonist or using a calcium mobilisation assay, an antibody binding assay, or a PCR-based virus entry assay e.g. as described in Hatse, S., et al., 2001. Molecular pharmacology, 60(1), pp. 164-173.

[0447] In some embodiments, the CXCR4 variant comprises one or more amino acid substitution selected from: V160L, A175F, Q200A, D262N, and H281A. These amino acid positions refer to the positions in the CXCR4 shown in SEQ ID NO: 2. These amino acid positions can be converted to the corresponding position in other isoforms, variants,

and/or fragments. For example, these correspond to: V164L, A179F, Q200A, D262N, and H285A in the CXCR4 shown in SEQ ID NO: 1.

[0448] In some embodiments, the CXCR4 variant comprises one or more amino acid substitution selected from: A175F, Q200A, D262N, and H281A. In some embodiments, the CXCR4 variant comprises one or more amino acid substitution selected from: A175F or D262N. In some embodiments, the CXCR4 variant comprises the amino acid substitution A175F. In some embodiments, the CXCR4 variant comprises the amino acid substitution Q200A. In some embodiments, the CXCR4 variant comprises the amino acid substitution D262N. In some embodiments, the CXCR4 variant comprises the amino acid substitution H281A.

[0449] In some embodiments, the CXCR4 variant comprises or consists of an amino acid sequence that has at least 70%, at least 80%, at least 85%, at least 90%, at least 95%, at least 96%, at least 97%, at least 98%, at least 99% or 100% identity to SEQ ID NO: 2 and comprises one or more amino acid substitution selected from: V160L, A175F, Q200A, D262N, and H281A, preferably wherein the amino acid sequence substantially retains the engraftment enhancing activity of the protein represented by SEQ ID NO: 2.

[0450] In some embodiments, the CXCR4 variant comprises or consists of an amino acid sequence that has at least 70%, at least 80%, at least 85%, at least 90%, at least 95%, at least 96%, at least 97%, at least 98%, at least 99% or 100% identity to SEQ ID NO: 2 and comprises one or more amino acid substitution selected from: A175F, Q200A, D262N, and H281A, preferably wherein the amino acid sequence substantially retains the engraftment enhancing activity of the protein represented by SEQ ID NO: 2.

[0451] Exemplary CXCR4 variants are provided by SEQ ID NOs: 5-9. In one embodiment, the CXCR4 variant comprises or consists of an amino acid sequence that has at least 70%, at least 80%, at least 85%, at least 90%, at least 95%, at least 96%, at least 97%, at least 98%, at least 99% or 100% identity to any of SEQ ID NOs: 5-9, preferably wherein the amino acid sequence substantially retains the engraftment enhancing activity of the protein represented by SEQ ID NO: 2.

[0452] In one embodiment, the CXCR4 variant comprises or consists of an amino acid sequence that has at least 70%, at least 80%, at least 85%, at least 90%, at least 95%, at least 96%, at least 97%, at least 98%, at least 99% or 100% identity to any of SEQ ID NOs: 6-9, preferably wherein the amino acid sequence substantially retains the engraftment enhancing activity of the protein represented by SEQ ID NO: 2.

[0453] In one embodiment, the amino acid sequence of a CXCR4 V160L variant is:

Exemplary CXCR4 V160L variant (SEQ ID NO: 5)
 MEGISIIYSDNYTEEMSGDYDSMKEPCFREANANFNKIFLPTIYSIIPL
 TGIVGNGLVILVMGYQKKLRSM TDKYRLHLSVADLLFVITLPFWAVDAVA
 NWYFGNFLCKAVHVIYTVNLYSSVLILAFISLDRLAIVHATNSQRPRKL
 LAEKVVYVGLWIPALLLTIPDFIFANVSEADRYICDRFYPNDLWVVVFQ
 FQHIMVGLILPGIVILSCYCI IISKLSHSGHQRKALKTTVILILAFFA

-continued

CWLPPYIGISIDSFILLEIIKQGEFENTVHKWISITEALAFFHCCLNPI
 LYAFLGAKFKTSAQHALTSVSRGSSLKILSKGKRGGHSSVSTESESSSFH
 SS

[0454] In one embodiment, the amino acid sequence of a CXCR4 A175F variant is:

Exemplary CXCR4 A175F variant (SEQ ID NO: 6)
 MEGISIIYSDNYTEEMSGDYDSMKEPCFREANANFNKIFLPTIYSIIPL
 TGIVGNGLVILVMGYQKKLRSM TDKYRLHLSVADLLFVITLPFWAVDAVA
 NWYFGNFLCKAVHVIYTVNLYSSVLILAFISLDRLAIVHATNSQRPRKL
 LAEKVVYVGVWIPALLLTIPDFIFNVSEADRYICDRFYPNDLWVVVFQ
 FQHIMVGLILPGIVILSCYCI IISKLSHSGHQRKALKTTVILILAFFA
 CWLPPYIGISIDSFILLEIIKQGEFENTVHKWISITEALAFFHCCLNPI
 LYAFLGAKFKTSAQHALTSVSRGSSLKILSKGKRGGHSSVSTESESSSFH
 SS

[0455] In one embodiment, the amino acid sequence of a CXCR4 Q200A variant is:

Exemplary CXCR4 Q200A variant (SEQ ID NO: 7)
 MEGISIIYSDNYTEEMSGDYDSMKEPCFREANANFNKIFLPTIYSIIPL
 TGIVGNGLVILVMGYQKKLRSM TDKYRLHLSVADLLFVITLPFWAVDAVA
 NWYFGNFLCKAVHVIYTVNLYSSVLILAFISLDRLAIVHATNSQRPRKL
 LAEKVVYVGVWIPALLLTIPDFIFANVSEADRYICDRFYPNDLWVVVFQ
 FQHIMVGLILPGIVILSCYCI IISKLSHSGHQRKALKTTVILILAFFA
 CWLPPYIGISIDSFILLEIIKQGEFENTVHKWISITEALAFFHCCLNPI
 LYAFLGAKFKTSAQHALTSVSRGSSLKILSKGKRGGHSSVSTESESSSFH
 SS

[0456] In one embodiment, the amino acid sequence of a CXCR4 H281A variant is:

Exemplary CXCR4 D262N variant (SEQ ID NO: 8)
 MEGISIIYSDNYTEEMSGDYDSMKEPCFREANANFNKIFLPTIYSIIPL
 TGIVGNGLVILVMGYQKKLRSM TDKYRLHLSVADLLFVITLPFWAVDAVA
 NWYFGNFLCKAVHVIYTVNLYSSVLILAFISLDRLAIVHATNSQRPRKL
 LAEKVVYVGVWIPALLLTIPDFIFANVSEADRYICDRFYPNDLWVVVFQ
 FQHIMVGLILPGIVILSCYCI IISKLSHSGHQRKALKTTVILILAFFA
 CWLPPYIGISINSFILLEIIKQGEFENTVHKWISITEALAFFHCCLNPI
 LYAFLGAKFKTSAQHALTSVSRGSSLKILSKGKRGGHSSVSTESESSSFH
 SS

Exemplary CXCR4 H281A variant

(SEQ ID NO: 9)

MEGISIYSDNYTEEMSGSDYDSMKEPCFREANANFNKIPLPTIYSIIFL
TGIVGNGLVILVMGYQKKLRSMTDKYRLHLSVADLLFVITLFFWAVDAVA
NWFYGNFLCKAVHVIYTVNLYSSVLILAFISLDRYLAIHVHATNSQRPRKL
LAEKVYVGVWIPALLLTIPDFIFANVSEADDRYICDRFYPNDLWVVVFQ
FQHIMVGLILPGIVILSCYCIISKLSHSGHQKRLKTKTVILILAFFA
CWLPPYIGISIDSFILLEIKQGCEFENTVAKWISITEALAFFHCCLNPI
LYAFLGAKFKTSAQHALTSVSRGSSSLKILSKGRGHSVSTESSESSPH
SS

[0457] In one embodiment, the CXCR4 variant is encoded by a nucleotide sequence that has at least 70%, at least 80%, at least 85%, at least 90%, at least 95%, at least 96%, at least 97%, at least 98%, at least 99% or 100% identity to any of SEQ ID NOS: 18-22, preferably wherein the protein encoded by the nucleotide sequence substantially retains the engraftment enhancing activity of the protein represented by SEQ ID NO: 2.

[0458] In one embodiment, the CXCR4 variant is encoded by a nucleotide sequence that has at least 70%, at least 80%, at least 85%, at least 90%, at least 95%, at least 96%, at least 97%, at least 98%, at least 99% or 100% identity to any of SEQ ID NOS: 19-22, preferably wherein the protein encoded by the nucleotide sequence substantially retains the engraftment enhancing activity of the protein represented by SEQ ID NO: 2.

[0459] In one embodiment, the nucleotide sequence encoding a CXCR4 V160L variant is:

Exemplary nucleotide encoding a CXCR4 V160L variant

(SEQ ID NO: 18)

ATGGAAGGCATCAGCATCTACACGAGCACAACCTACACCGAGGAAATGGG
CAGCGGCGACTACGACAGCATGAAGGAACCTGCTTCCGGGAAGAGAACG
CCAACTTCAACAAGATCTTCTGCCCCAATCTACAGCATCATCTTCTG
ACCGGCATCGTGGGCAACGGACTCGTGATCCTCGTGATGGGCTACCAGAA
AAAGCTGCGGAGCATGACCGACAAGTACCGGTGCACCTGAGCGTGGCCG
ACCTGCTGTTCTGTGATCACCTGCCTTTCTGGGCGTGACGCGCTGGCC
AATTGGTACTTCGGCAACTTCTGTGCAAGGCGGTGCACGTGATCTACAC
AGTGAACCTGTACAGCAGCGTGTGATCCTGGCCTTCATCAGCCTGGACA
GATACCTGGCCATCGTGACGCCACCAACAGCCAGCGGCTAGAAAGCTG
CTGGCCGAGAAGGTGGTGTACGTGGGCTGTGGATTCCCGCCTGCTGCT
GACCATCCCCGACTTCATCTTCCGCAACGTGTCCGAGGCCGACGACCGGT
ACATCTGCGACCGGTTCTACCCCAACGACCTGTGGGTGGTGGTGTTCAG
TTCCAGCACATCATGGTGGGACTGATCCTGCCTGGCATCGTGATTCTGAG
CTGCTACTGCATCATCATCAGCAAGCTGAGCCACAGCAAGGGCCACCAGA
AGCGGAAGGCCCTGAAACACCGGTGATCCTGATTCTGGCTTTCTTCGCC
TGCTGGCTGCCCTACTACATCGGCATCAGCATCGACAGCTTCATCCTGCT

-continued

GGAAATCATCAAGCAGGGCTGCGAGTTCGAGAACACCGTGACAAAGTGGA
TCAGCATTACCGAGGCCCTGGCCTTTTCCACTGCTGCCTGAACCTTATC
CTGTACGCCTTCTGGGCGCAAGTTCAAGACCTCTGCCCAGCAGCCCT
GACCAGCGTGTCCAGAGGAAGCAGCCTGAAGATCCTGAGCAAGGGCAAGA
GAGGCGGCCACAGCTCCGTGTCTACAGAGAGCGAGAGCAGCAGCTTCCAC
AGCAGC

[0460] In one embodiment, the nucleotide sequence encoding a CXCR4 A175F variant is:

Exemplary nucleotide encoding a CXCR4 A175F variant

(SEQ ID NO: 19)

ATGGAAGGCATCAGCATCTACACGAGCACAACCTACACCGAGGAAATGGG
CAGCGGCGACTACGACAGCATGAAGGAACCTGCTTCCGGGAAGAGAACG
CCAACTTCAACAAGATCTTCTGCCCCAATCTACAGCATCATCTTCTG
ACCGGCATCGTGGGCAACGGACTCGTGATCCTCGTGATGGGCTACCAGAA
AAAGCTGCGGAGCATGACCGACAAGTACCGGTGCACCTGAGCGTGGCCG
ACCTGCTGTTCTGTGATCACCTGCCTTTCTGGGCGTGACGCGCTGGCC
AATTGGTACTTCGGCAACTTCTGTGCAAGGCGGTGCACGTGATCTACAC
AGTGAACCTGTACAGCAGCGTGTGATCCTGGCCTTCATCAGCCTGGACA
GATACCTGGCCATCGTGACGCCACCAACAGCCAGCGGCTAGAAAGCTG
CTGGCCGAGAAGGTGGTGTACGTGGGCGTGATTCGCCCTGCTGCT
GACCATCCCCGACTTCATCTTCTTCAACGTGTCCGAGGCCGACGACCGGT
ACATCTGCGACCGGTTCTACCCCAACGACCTGTGGGTGGTGGTGTTCAG
TTCCAGCACATCATGGTGGGACTGATCCTGCCTGGCATCGTGATTCTGAG
CTGCTACTGCATCATCATCAGCAAGCTGAGCCACAGCAAGGGCCACCAGA
AGCGGAAGGCCCTGAAACACCGGTGATCCTGATTCTGGCTTTCTTCGCC
TGCTGGCTGCCCTACTACATCGGCATCAGCATCGACAGCTTCATCCTGCT
GGAAATCATCAAGCAGGGCTGCGAGTTCGAGAACACCGTGACAAAGTGGA
TCAGCATTACCGAGGCCCTGGCCTTTTCCACTGCTGCCTGAACCTTATC
CTGTACGCCTTCTGGGCGCAAGTTCAAGACCTCTGCCCAGCAGCCCT
GACCAGCGTGTCCAGAGGAAGCAGCCTGAAGATCCTGAGCAAGGGCAAGA
GAGGCGGCCACAGCTCCGTGTCTACAGAGAGCGAGAGCAGCAGCTTCCAC
AGCAGC

[0461] In one embodiment, the nucleotide sequence encoding a CXCR4 Q200A variant is:

Exemplary nucleotide encoding a CXCR4 Q200A variant

(SEQ ID NO: 20)

ATGGAAGGCATCAGCATCTACACGAGCACAACCTACACCGAGGAAATGGG
CAGCGGCGACTACGACAGCATGAAGGAACCTGCTTCCGGGAAGAGAACG
CCAACTTCAACAAGATCTTCTGCCCCAATCTACAGCATCATCTTCTGCT

-continued

ACCGGCATCGTGGGCAACGGACTCGTGATCCTCGTGATGGGCTACCAGAA
 AAAGCTGCGGAGCATGACCGACAAGTACCGGCTGCACCTGAGCGTGGCCG
 ACCTGCTGTTCTGTATCACCTTGCCTTTCTGGGCCGTGGACGCCGTGGCC
 AATTGGTACTTCGGCAACTTCTGTGCAAGGCCGTGCACGTGATCTACAC
 AGTGAACCTGTACAGCAGCGTCTGATCCTGGCCTTCATCAGCCTGGACA
 GATACCTGGCCATCGTGACGCCACCAACAGCCAGCGGCTAGAAAGCTG
 CTGGCCGAGAAGGTGGTGTACGTGGGCGTGTGGATTCCCGCCCTGCTGCT
 GACCATCCCCGACTTCATCTTCGCCAACGTGTCGAGGCCGACGACCCGT
 ACATCTGCACCGGTTCTACCCCAACGACCTGTGGGTGGTGGTGTTCGCG
 TTCCAGCACATCATGGTGGGACTGATCCTGCCTGGCATCGTGATTCTGAG
 CTGCTACTGCATCATCATCAGCAAGCTGAGCCACAGCAAGGGCCACCAGA
 AGCGGAAGGCCCTGAAAACCACCGTGATCCTGATTCTGGCTTTCTTCGCC
 TGCTGGCTGCCCTACTACATCGGCATCAGCATCGACAGCTTCATCCTGCT
 GGAAATCATCAAGCAGGGCTGCGAGTTCGAGAACACCGTGCAAGTGGGA
 TCAGCATTACCGAGGCCCTGGCCTTTTCTCACTGCTGCTGAACCTATC
 CTGTACGCCTTCCTGGGCGCAAGTTCAAGACCTCTGCCCAGCAGCCCT
 GACCAGCGTGTCCAGAGGAAGCAGCCTGAAGATCCTGAGCAAGGGCAAGA
 GAGGCGGCCACAGCTCCGTGTCTACAGAGAGCGAGAGCAGCAGCTCCAC
 AGCAGC

[0462] In one embodiment, the nucleotide sequence encoding a CXCR4 D262N variant is:

Exemplary nucleotide encoding a CXCR4 D262N variant

(SEQ ID NO: 21)

ATGGAAGGCATCAGCATCTACACCAGCGACAACCTACACCGAGGAAATGGG
 CAGCGGCGACTACGACAGCATGAAGGAACCTGTTCGGGAAGAGAACG
 CCAACTTCAACAAGATCTTCTGCCCAATCTACAGCATCATCTTCTG
 ACCGCATCGTGGGCAACGGACTCGTGATCCTCGTGATGGGCTACCAGAA
 AAAGCTGCGGAGCATGACCGACAAGTACCGGCTGCACCTGAGCGTGGCCG
 ACCTGCTGTTCTGTATCACCTTGCCTTTCTGGGCCGTGGACGCCGTGGCC
 AATTGGTACTTCGGCAACTTCTGTGCAAGGCCGTGCACGTGATCTACAC
 AGTGAACCTGTACAGCAGCGTCTGATCCTGGCCTTCATCAGCCTGGACA
 GATACCTGGCCATCGTGACGCCACCAACAGCCAGCGGCTAGAAAGCTG
 CTGGCCGAGAAGGTGGTGTACGTGGGCGTGTGGATTCCCGCCCTGCTGCT
 GACCATCCCCGACTTCATCTTCGCCAACGTGTCGAGGCCGACGACCCGT
 ACATCTGCACCGGTTCTACCCCAACGACCTGTGGGTGGTGGTGTTCAG
 TTCCAGCACATCATGGTGGGACTGATCCTGCCTGGCATCGTGATTCTGAG
 CTGCTACTGCATCATCATCAGCAAGCTGAGCCACAGCAAGGGCCACCAGA
 AGCGGAAGGCCCTGAAAACCACCGTGATCCTGATTCTGGCTTTCTTCGCC
 TGCTGGCTGCCCTACTACATCGGCATCAGCATCGACAGCTTCATCCTGCT
 GGAAATCATCAAGCAGGGCTGCGAGTTCGAGAACACCGTGGCCAAAGTGA
 TCAGCATTACCGAGGCCCTGGCCTTTTCTCACTGCTGCCTGAACCTATC
 CTGTACGCCTTCCTGGGCGCAAGTTCAAGACCTCTGCCCAGCAGCCCT
 GACCAGCGTGTCCAGAGGAAGCAGCCTGAAGATCCTGAGCAAGGGCAAGA
 GAGGCGGCCACAGCTCCGTGTCTACAGAGAGCGAGAGCAGCAGCTCCAC
 AGCAGC

-continued

GGAAATCATCAAGCAGGGCTGCGAGTTCGAGAACACCGTGACAAAGTGA
 TCAGCATTACCGAGGCCCTGGCCTTTTCTCACTGCTGCCTGAACCTATC
 CTGTACGCCTTCCTGGGCGCAAGTTCAAGACCTCTGCCCAGCAGCCCT
 GACCAGCGTGTCCAGAGGAAGCAGCCTGAAGATCCTGAGCAAGGGCAAGA
 GAGGCGGCCACAGCTCCGTGTCTACAGAGAGCGAGAGCAGCAGCTCCAC
 AGCAGC

[0463] In one embodiment, the nucleotide sequence encoding a CXCR4 H281A variant is:

Exemplary nucleotide encoding a CXCR4 H281A variant

(SEQ ID NO: 22)

ATGGAAGGCATCAGCATCTACACCAGCGACAACCTACACCGAGGAAATGGG
 CAGCGGCGACTACGACAGCATGAAGGAACCTGCTTCGGGAAGAGAACG
 CCAACTTCAACAAGATCTTCTGCCCAATCTACAGCATCATCTTCTG
 ACCGCATCGTGGGCAACGGACTCGTGATCCTCGTGATGGGCTACCAGAA
 AAAGCTGCGGAGCATGACCGACAAGTACCGGCTGCACCTGAGCGTGGCCG
 ACCTGCTGTTCTGTATCACCTTGCCTTTCTGGGCCGTGGACGCCGTGGCC
 AATTGGTACTTCGGCAACTTCTGTGCAAGGCCGTGCACGTGATCTACAC
 AGTGAACCTGTACAGCAGCGTGTGATCCTGGCCTTCATCAGCCTGGACA
 GATACCTGGCCATCGTGACGCCACCAACAGCCAGCGGCTAGAAAGCTG
 CTGGCCGAGAAGGTGGTGTACGTGGGCGTGTGGATTCCCGCCCTGCTGCT
 GACCATCCCCGACTTCATCTTCGCCAACGTGTCGAGGCCGACGACCCGT
 ACATCTGCACCGGTTCTACCCCAACGACCTGTGGGTGGTGGTGTTCAG
 TTCCAGCACATCATGGTGGGACTGATCCTGCCTGGCATCGTGATTCTGAG
 CTGCTACTGCATCATCATCAGCAAGCTGAGCCACAGCAAGGGCCACCAGA
 AGCGGAAGGCCCTGAAAACCACCGTGATCCTGATTCTGGCTTTCTTCGCC
 TGCTGGCTGCCCTACTACATCGGCATCAGCATCGACAGCTTCATCCTGCT
 GGAAATCATCAAGCAGGGCTGCGAGTTCGAGAACACCGTGGCCAAAGTGA
 TCAGCATTACCGAGGCCCTGGCCTTTTCTCACTGCTGCCTGAACCTATC
 CTGTACGCCTTCCTGGGCGCAAGTTCAAGACCTCTGCCCAGCAGCCCT
 GACCAGCGTGTCCAGAGGAAGCAGCCTGAAGATCCTGAGCAAGGGCAAGA
 GAGGCGGCCACAGCTCCGTGTCTACAGAGAGCGAGAGCAGCAGCTCCAC
 AGCAGC

Integrin alpha-4 (ITGA4)

[0464] In one aspect, the present invention provides use of ITGA4 (or a fragment or variant thereof) for increasing engraftment by haematopoietic stem and/or progenitor cells (HSPCs).

[0465] In one aspect, the present invention provides a method for increasing engraftment by haematopoietic stem and/or progenitor cells (HSPCs), wherein the method comprises the step of genetically engineering the HSPCs to express ITGA4 (or a fragment or variant thereof).

[0466] In one aspect, the present invention provides a population of genetically engineered haematopoietic stem

and/or progenitor cells (HSPCs), wherein the HSPCs are genetically engineered to express ITGA4 (or a fragment or variant thereof).

[0467] In one aspect, the present invention provides a method for haematopoietic stem and/or progenitor cell (HSPC) transplantation comprising the steps:

[0468] (a) providing a population of HSPCs which are genetically engineered to express ITGA4 (or a fragment or variant thereof); and

[0469] (b) administering the HSPCs to a subject.

[0470] Integrin alpha-4 (ITGA4) is also known as CD49 antigen-like family member D, Integrin alpha-IV, and VLA-4 subunit alpha and makes up half of the $\alpha 4 \beta 1$ lymphocyte homing receptor.

[0471] In a preferred embodiment, the ITGA4 is human ITGA4. A human ITGA4 may have an amino acid sequence of UniProtKB P13612.

[0472] An exemplary ITGA4 polypeptide is provided by SEQ ID NO: 29. In one embodiment, the ITGA4 comprises or consists of an amino acid sequence that has at least 70%, at least 80%, at least 85%, at least 90%, at least 95%, at least 96%, at least 97%, at least 98%, at least 99% or 100% identity to SEQ ID NO: 29, preferably wherein the amino acid sequence substantially retains the engraftment enhancing activity of the protein represented by SEQ ID NO: 29.

[0473] In one embodiment, the amino acid sequence of ITGA4 is:

Exemplary ITGA4

(SEQ ID NO: 29)

MAWEARREPGPRRAAVRETVMLLCLGVPTGRPYNDTESALLYQGPHNT
LFGYSVVLHSHGANRWLLVGAPTANWLANASVINPGAIRCRIGKNPGQT
CEQLQLGSPNGEPCGKTCLEERDNQWLVTLRQPGENGSIIVTCGHRWKN
IFYIKNENKLPTGGCYGVPPDLRTELSKRIAPCYQDYVKKGFENFASCAQ

-continued

GISSFYTKDLIVMGAPGSSYWTGSLFVYNIITNKYKAFLDKQNQVKFGSY
LGYSVGAGHFRSQHTTEVVGAPQHEQIGKAYIFSIDEKELNLIHEMKGK
KLGSYFGASVCAVDLNADGFSDDLVLGAPMQSTIREGRVFVYINSGSGAV
MNAMEINLVGSDKYAARFGESIVNLGDIIDNGFEDVAIGAPQEDDLQGA
YIYNGRADGISSTFSQRIEGLQISKSLSMFGQSISGQIDADNNGYVDVAV
GAFRSDSAVLLRTRPVVIVDASLSHPESVNRKFDVCVENGWPSVICDLTL
CFSYKGKEVPGYIVLFYNMSLDVNRKAESPFRFYSSNGTSDVITGSIQV
SSREANCRTHQAFMRKDVRDILTPIQIEAAHYHLGPHVISKRSTEEFPPLQ
PILQKKEKDIMKKTINFARFCAHENCASDLQVSAKIGFLKPHENKTYLA
VGSMTKMLNLVSLFNAGDDAYETTLHVKLPGVLYFIKILELEEKQINCEV
TDNSGVVQLDCSIGIYVDHLSRIDISFLDLVSSLSRAEEDLSITVHATC
ENEEEMDNLKHRSVTVAIPLKYEVKLTVHGFVNPTSFVYGSNDENEPETC
MVEKMNLTFHVINTGNSMAPNVSEIMVPNSFSPQTDKLFNILDVQTTTG
ECHFENYQQRVCALEQQKSAMQTLKGIVRFLSKTDKRLLYCIKADPHCLNF
LCNFGKMGESGKEASVHIQLEGRPSILEMDETSALKFEIRATGFPEPNPRV
IELNKDENVAHVLLLEGLHHQRPKRYFTIIVISSLLGLIVLLLIISYVMW
KAGFFKRQYKISILQEENRRDSWSYINSKSNDD

[0474] In a preferred embodiment, the nucleotide sequence encoding the ITGA4 is codon optimised.

[0475] In one embodiment, the ITGA4 is encoded by a nucleotide sequence that has at least 70%, 80%, 90%, 95%, 96%, 97%, 98% 99% or 100% identity to SEQ ID NO: 30, preferably wherein the protein encoded by the nucleotide sequence substantially retains the engraftment enhancing activity of the protein represented by SEQ ID NO: 29.

[0476] In one embodiment, the nucleotide sequence encoding ITGA4 is:

Exemplary nucleotide sequence encoding ITGA4

(SEQ ID NO: 30)

ATGGCTTGGGAGGCTCGGAGAGAACCTGGACCTAGAAGAGCTGCCGTGCGGGAGACTGTGATGCTGCTGCTG
TGCCTGGGGGTGCCACAGGCAGACCTTACAACGTGGATACCGAGAGCGCCCTGCTGTATCAGGGCCCCAC
AACACCCTGTTTGGCTACTCTGTGGTGTGCACAGCCACGGCGCAACCGCTGGCTGCTGGTGGGCGCCCCC
ACCGCCAATTGGCTGGCCAATGCCTCCGTGATCAACCCAGGCGCCATCTACAGATGTCGGATCGGCAAGAAT
CCTGGCCAGACATGCGAGCAGCTGCAGCTGGGCTCCCCAACGGCGAGCCTTGTGGCAAGACATGCCTGGAG
GAGAGGACAATCAGTGGCTGGGCGTGACACTGAGCAGACAGCCGCGGAGAAGCGCTCCATCGTGACATGC
GGCCACAGATGGAAGAATCTTTTACATCAAGAACGAGAATAAGCTGCCAACAGGCGGCTGCTATGGCGTGT
CCCCAGACCTGAGAACAGAGCTGAGCAAGCGGATCGCCCATGCTACCAGGATTATGTGAAGAAGTTTGGC
GAGAATTTGCTCTTGTCCAGGCGGCATCTCCTCTTCTACACCAAGGATCTGATCGTGATGGGCGCCCTT
GGCTCTTCTTATTGGACAGGCTCTCTGTTGTTGATATAATATCACAAACCAAGTACAAGGCTTCTCTGGAC
AAGCAGAACCGGTGAAGTTTCGGCTCCTATCTGCGGTACAGCGTGGGCGCGGCCACTTTCGCTCTCAGCAC
ACCACAGAGGTGGTGGGCGGCGCCCCCAGCACGAGCAGATCGGCAAGGCTACATCTTCTCCATCGACGAG
AAGGAGCTGAATATCTGCACGAGATGAAGGCAAGAAGCTGGGCTCTACTTTGGCGCCTCCGTGTGCGCC
GTGGACCTGAATGCCGACGGCTTTTCCGACCTGCTGGTGGGCGCCCCAATGCAGTCCACAATCAGAGAGGAG

- continued

GGCAGAGTGTTCGTGTATATCAATTCCGGCAGCGCGCCGTGATGAATGCCATGGAGACCAATCTGGTGGGC
 TCCGACAAGTATGCCGCCAGATTCCGGCAGAGCATCGTGAATCTGGGCGACATCGACAACGATGGCTTCGAG
 GACGTGGCCATCGGCGCCCCACAGGAGGATGACCTGCAGGGCGCCATCTATATCTATAACGGCCGGCCGAC
 GGCATCTCTAGCACCTTCTCCAGAGAATCGAGGGCCTGCAGATCAGCAAGTCCCTGAGCATGTTCCGGCCAG
 AGCATCTCCGGCCAGATCGACGCCGATAATAACGGCTACGTGGATGTGGCCGTGGGCGCCTTTAGAAGCGAC
 TCCGCCGTGCTGCTGAGAACAAGGCCCGTGGTGATCGTGGATGCCCTCCCTGTCTCACCCGAGTCCGTGAAT
 CGGACAAAGTTTACTGCGTGGAGAATGGCTGGCCAAGCGTGTGCATCGATCTGACACTGTGCTTTTCCTAT
 AAGGGCAAGGAGGTGCCAGGCTATATCGTGTGTTTTACAACATGTCTCTGGATGTGAACAGAAAGGCCGAG
 TCCCCCACAAGATTCTACTTTTCTCTAACGGCACCTCTGATGTGATCACCGGCTCTATCCAGGTGTCCAGC
 AGGGAGGCCAATTGCAGAACCACAGGCCCTTATGCGGAAGGATGTGCGCGACATCCTGACCCCAATCCAG
 ATCGAGGCCGCTATCACCTGGGCCCCACGTGATCTCAAGCGGTCCACCGAGAGTTCCCTCCACTGCAG
 CCAATCTGCAGCAGAAGAAGGAGAAGGACATCATGAAGAAGACAATCACTTCGCCAGGTTTTGCGCCAC
 GAGAAGTGTTCGCCGCACTGCAGGTGTCTGCCAAGATCGGCTTCTGAAGCCCAAGAGAACAGACATAT
 CTGGCCGTGGGCTCCATGAAGACCCTGATGCTGAACGTGAGCCTGTTTAACGCCGGCGACGATGCCCTACGAG
 ACAACTGCACGTGAAGCTGCCAGTGGGCTGTACTTCATCAAGATCCTGGAGCTGGAGGAGAAGCAGATC
 AACTGTGAGGTGACCGATAACTCCGGCGTGGTGCAGCTGGATTGCAGCATCGGCTATATCTACGTGGACCAC
 CTGTCCCGCATCGACATCTCTTTCTGTCTGGACGTGTCCAGCCTGTCCCGGGCCGAGGAGGACCTGTCCATC
 ACAGTGCACGCCACCTGCGAGAATGAGGAGGAGATGGACAACCTGAAGCACTCCAGAGTGACAGTGGCCATC
 CCACTGAAGTACGAGGTGAAGCTGACAGTGCACGGCTTGTGAATCCAACCTCCTTCGTGTACGGCTCCAAT
 GACGAGAATGAGCCAGAGACATGTATGGTGGAGAAGATGAACCTGACATTTACGTGATCAATACAGGCAAT
 TCTATGGCCCCAATCGTGAAGCTGGAGATCATGGTGCCAAATTTCTTCAGCCCACAGACAGACAAGCTGTTT
 AACATCCTGGACGTGCAGACAACCACAGCGAGTGTCACTTTGAGAACTACCAGAGAGTGTGCGCCCTGGAG
 CAGCAGAAGTCCGCCATGCAGACACTGAAGGGCATCGTGAGATTTCTGAGCAAGACAGATAAGAGGCTGCTG
 TACTGCATCAAGGCCGATCCCCACTGCCTGAATTTCTGTGCAACTTCGGCAAGATGGAGTCTGGCAAGGAG
 GCCTCCGTGCACATCCAGCTGGAGGGCAGACCTCCATCCTGGAGATGGACGAGACCAGCGCCCTGAAGTTC
 GAGATCAGAGCCACAGGCTTCCCAGAGCCCAACCCCGGGTGATCGAGCTGAACAAGGATGAGAACGTGGCC
 CACGTGCTGCTGGAGGGCTGCACCAACAGCGGCCAAGAGATATTTACCATCGTGATCATCTCCAGCTCT
 CTGCTGCTGGGCTGATCGTGTCTGTCTGATCTCTATGTGATGTGAAGCCGGCTTCTTTAAGCGGCAG
 TACAAGTCCATCCTGCAGGAAGAAAATCGACGCGATTCTGGTCTTACATTAATTTAAATCAAACGACGAC

[0477] The ITGA4 variant may be one which enhances engraftment to the same or a greater level than ITGA4. This may be determined by any suitable assay. For example, using a transmigration assay or by transplanting genetically engineered HSPCs and determining the extent of engraftment following transplantation.

[0478] The ITGA4 variant may have maintained or increased response to natural ligands (e.g. MAdCAM and VCAM) compared to ITGA4. In some embodiments, the ITGA4 variant has the same or greater binding affinity for natural ligands (e.g. MAdCAM and VCAM) compared to ITGA4. This may be determined by any suitable assay. For example, by using a binding assay e.g. as described in Darc, M., et al., 2011. PloS one, 6(9), p.e24461.

[0479] A person skilled in the art would be able to generate variants and/or fragments retaining the engraftment enhancing activity of ITGA4 based on conservative substitutions and/or the known structural and functional features of ITGA4. These are described, for instance in Yu, Y., et al., 2012. Journal of Cell Biology, 196(1), pp. 131-146.

[0480] In some embodiments, the ITGA4 variant has increased resistance to a VLA-4 antagonist compared to ITGA4. In some embodiments, the ITGA4 variant has a reduced binding affinity for a VLA-4 antagonist (e.g. natalizumab). This may be determined by any suitable assay. For example, using a transmigration assay in the absence or presence of a VLA-4 antagonist or using a binding assay e.g. as described in Darc, M., et al., 2011. PloS one, 6(9), p.e24461.

Tyrosine-Protein Kinase KIT (KIT)

[0481] In one aspect, the present invention provides use of KIT (or a fragment or variant thereof) for increasing engraftment by haematopoietic stem and/or progenitor cells (HSPCs).

[0482] In one aspect, the present invention provides a method for increasing engraftment by haematopoietic stem and/or progenitor cells (HSPCs), wherein the method comprises the step of genetically engineering the HSPCs to express KIT (or a fragment or variant thereof).

[0483] In one aspect, the present invention provides a population of genetically engineered haematopoietic stem and/or progenitor cells (HSPCs), wherein the HSPCs are genetically engineered to express KIT (or a fragment or variant thereof).

[0484] In one aspect, the present invention provides a method for haematopoietic stem and/or progenitor cell (HSPC) transplantation comprising the steps:

[0485] (a) providing a population of HSPCs which are genetically engineered to express KIT (or a fragment or variant thereof); and

[0486] (b) administering the HSPCs to a subject.

[0487] Tyrosine-protein kinase KIT (KIT) is also known as mast/stem cell growth factor receptor Kit (EC: 2.7.10.1), SCFR, Piebald trait protein (PBT), Proto-oncogene c-Kit, Tyrosine-protein kinase Kit and CD117. KIT is a tyrosine-

protein kinase that acts as cell-surface receptor for the cytokine KITLG/SCF and plays an essential role in the regulation of cell survival and proliferation, hematopoiesis, stem cell maintenance, gametogenesis, mast cell development, migration and function, and in melanogenesis.

[0488] In a preferred embodiment, the KIT is human KIT. A human KIT may have an amino acid sequence of UniProtKB P10721.

[0489] An exemplary KIT polypeptide is provided by SEQ ID NOs: 31 and 47. In one embodiment, the KIT comprises or consists of an amino acid sequence that has at least 70%, at least 80%, at least 85%, at least 90%, at least 95%, at least 96%, at least 97%, at least 98%, at least 99% or 100% identity to SEQ ID NO: 31 or 47, preferably wherein the amino acid sequence substantially retains the engraftment enhancing activity of the protein represented by SEQ ID NO: 31 or 47, respectively.

[0490] In one embodiment, the KIT comprises or consists of an amino acid sequence that has at least 70%, at least 80%, at least 85%, at least 90%, at least 95%, at least 96%, at least 97%, at least 98%, at least 99% or 100% identity to SEQ ID NO: 31, preferably wherein the amino acid sequence substantially retains the engraftment enhancing activity of the protein represented by SEQ ID NO: 31.

[0491] In one embodiment, the amino acid sequence of KIT is:

Exemplary KIT

(SEQ ID NO: 31)

MRGARGAWDFLCVLLLLLRVQTGSSQPSVSPGEPSPPSIHGKSDLIVRVGDEIRLLCTDPGFVKWTFEILD
ETNENKQNEWITEKAEATNTGKYCTCTNKHGLSNSIYVFVRDPAKLFVDRSLYKEDNDTLVRCLPTDPEVT
NYSKGCQKGPLKDLRFIPDPKAGIMIKSVKRAYHRLCLHCSVDQEGKSVLSEKFILKVRPAFAKAVPVVSV
SKASYLLREGEEFTVTCTIKDVSSSVYSTWKRENSQTKLQEKYNSWHHGFNYERQATLTISSARVNDSGVF
MCYANNTFGSANVTTLLEVVDKGFINIFPMINTTVFVNDGENVDLIVEYEAFPKPEHQWIYMNRTFTDKWE
DYPKSENESENIRYVSELHLTRLKGTEGGTYTFLVNSNDVNAIAFNVYVNTKPEILTYDLRVNGLQCVAAAG
FPEPTIDWYFCPGTEQRCASVLPVDVQTLNSSGPPFGKLVVQSSIDSSAFKHNGTVECKAYNDVGKTSAYF
NFAFKGNKQEIHPHTLFTPLLIGFVIVAGMMCIIVMILTYKYLQKPMYEVQWVVEEINGNNYVYIDPTQL
PYDHKWEFPRNRLSFGKTLGAGAFGVVEATAYGLIKSDAAMTVAVKMLKPSAHLTEREALMSCLKVLSYLG
NHMNIVNLLGACTIGGPTLVITEYCCYGDLLNFLRRKRDSFICSKQEDHAEALYKNLLHSKESSCSDSTNE
YMDMKPGVS YVVP TKADKRRSVRIGSYIERDVT PAIMEDDELALDLEDLLSFSYQVAKGMAFLASKNCIHRD
LAARNILLTHGRITKICDPGLARDIKNDSNYVVGKNARLPVKWMAPEIFNCVYTFESDVWSYGIFLWELFS
LGSSPYPGMPVDSKFYKMIKEGFRMLSPEHAPAEMYD IMKTCWDADPLKRPTFKQIVQLIEKQISESTNHIY
SNLANCSPNRQKPVVDHVSVRINSVSGSTASSSQPLLVDHV

[0492] In one embodiment, the amino acid sequence of KIT is:

Exemplary KIT

(SEQ ID NO: 47)

MRGARGAWDFLCVLLLLLRVQTGSSQPSVSPGEPSPPSIHGKSDLIVRVGDEIRLLCTDPGFVKWTFEILD
ETNENKQNEWITEKAEATNTGKYCTCTNKHGLSNSIYVFVRDPAKLFVDRSLYKEDNDTLVRCLPTDPEVT
NYSKGCQKGPLKDLRFIPDPKAGIMIKSVKRAYHRLCLHCSVDQEGKSVLSEKFILKVRPAFAKAVPVVSV
SKASYLLREGEEFTVTCTIKDVSSSVYSTWKRENSQTKLQEKYNSWHHGFNYERQATLTISSARVNDSGVF

-continued

MCYANNTFGSANVTTTLEVVDKGFNIFPMINTTVFVNDGENVDLIVEYEAFKPEHQQWIYMNRTFTDKWE
 DYPKSENESENIRYVSELHLTRLKGTEGGTYTFLVNSNDVNAAIAFNVYVNTKPEILTYDRLVNGMLQCVAAG
 FPEPTIDWYFCPGTEQRCASVLPVDVQTLNSSGPPFGKLVVQSSIDSSAFKHNGTVECKAYNDVGKTSAYF
 NFAFKEQIHPHTLFTPLLIGFVIVAGMMCIIVMILTYKYLQKPMYEVQWKVVEEINGNNYVYIDPTQLPYDH
 KWEFPRNRLSPGKTLGAGAFGKVVEATAYGLIKSDAAMTVAVKMLKPSAHLTEREALMSELKVLVSYLGNHMN
 IVNLLGACTIGGPTLVIITEYCCYGDLLNPLRRKRDSFICSKQEDHAEALYKNLLHSSKSSCSDSTNEYMDM
 KPGVSYVVPTKADKRRSVRIGSYIERDVTAIMEDDELALDLEDLLSFSYQVAKGMAFLASKNCIHRDLAAR
 NILLTHGRITKICDFGLARDIKNSNYVVKGNARLPVKWMAPEISFNCVYTFESDVWSYGIFLWELFSLGSS
 PYPGMPVDSKFYKMIKEGFRMLSPEHAPAEMYDIMKTCWDADPLKRPTFKQIVQLIEKQISESTNHIYSNLA
 NCSPNRQKPVVDHSVRINSVGSTASSSQPLLVDHDDV

[0493] In a preferred embodiment, the nucleotide sequence encoding the KIT is codon optimised.

[0494] In one embodiment, the KIT is encoded by a nucleotide sequence that has at least 70%, 80%, 90%, 95%, 96%, 97%, 98% 99% or 100% identity to SEQ ID NO: 32,

preferably wherein the protein encoded by the nucleotide sequence substantially retains the 40 engraftment enhancing activity of the protein represented by SEQ ID NO: 31.

[0495] In one embodiment, the nucleotide sequence encoding KIT is:

Exemplary nucleotide sequence encoding KIT

(SEQ ID NO: 32)

ATGAGAGGCGCTCGCGCGCCTGGGATTTTCTCTGCGTTCCTGCTCTACTGCTTCGCGTCCAGACAGGCTCT
 TCTCAACCATCTGTGAGTCCAGGGGAACCGTCTCCACCATCCATCCATCCAGGAAATCAGACTTAATAGTC
 CGCGTGGGCGACGAGATTAGGCTGTTATGCACTGATCCGGGCTTTGTCAAATGGACTTTTGAGATCCTGGAT
 GAAACGAATGAGAATAAGCAGAATGAATGGATCACGGAAGGCAGAGCCACCAACACCGGCAATACACG
 TGACCAACAAACACGGCTTAAGCAATTCATTATGTGTTTGTAGAGATCCTGCCAAGCTTTTCCTTGTT
 GACCGCTCCTTGATGGGAAAGAAGACAACGACACGCTGGTCCGCTGTCTCTCACAGCCAGAAAGTGACC
 AATTATTCCTCAAGGGGTGCCAGGGGAAGCCTCTTCCAAGGACTTGAGGTTTATTCCTGACCCCAAGGCG
 GGCATCATGATCAAAAGTGTGAAACGCGCCTACCATCGGCTCTGTCTGCATTGTTCTGTGGACAGGAGGGC
 AAGTCAGTGCTGTGCGAAAAATTCATCCTGAAAGTGAGGCCAGCCTTCAAAGCTGTGCCTGTTGTGTCTGTG
 TCCAAAGCAAGCTATCTTCTTAGGGAAGGGAAGAATTACAGTGACGTGCACAATAAAGATGTGTCTAGT
 TCTGTGTACTCAACGTGGAAGAGAGAAACAGTCAGACTAACTACAGGAGAAATATAATAGCTGGCATCAC
 GGTGACTTCAATTATGAACGTCAGGCAACGTTGACTATCAGTTCAGCGAGAGTTAATGATTCTGGAGTGTTT
 ATGTGTTATGCCAATAATACTTTTGATCAGCAAATGTCAACAACCTTGGAAGTAGTAGATAAAGGATTC
 ATTAATATCTTCCCCATGATAAACACTACAGTATTTGTAAACGATGGAGAAAATGTAGATTGATTGTTGAA
 TATGAAGCATTCCCCAACCTGAACACCAGCAGTGGATCTATATGAACAGAACCTTCACTGATAAATGGGAA
 GATTATCCCAAGCTGAGAATGAAAGTAATATCAGATACGTAAGTGAACCTTCATCTAACGAGATTAAAGGC
 ACCGAAGGAGGCACTTACACATTCTAGTGTCCAATCTGACGTCAATGCTGCATAGCATTTAATGTTTAT
 GTGAATACAAAACCAGAAATCCTGACTTACGACAGGCTCGTGAATGGCATGCTCCAATGTGTGGCAGCAGGA
 TTCCAGAGCCCAATAGATTGGTATTTTGTCCAGGAAGTACGAGAGATGCTCTGCTTCTGTACTGCCA
 GTGGATGTGCAGACACTAACTCATCTGGGCCACCGTTTGGAAAGCTAGTGGTTCAGAGTTCTATAGATTCT
 AGTGCATTCAAGCACAATGGCACGGTTGAATGTAAGGCTTACAACGATGTGGGCAAGACTTCTGCCTATTTT
 AACTTTGCATTTAAAGGTAACAACAAGAGCAAATCCATCCCAACCCCTGTTCACTCCTTGTCTGATTGGT
 TTCGTAATCGTAGCTGGCATGATGTGCATTATTGTGATGATTCTGACCTACAAATATTTACAGAAACCCATG

-continued

TATGAAGTACAGTGAAGGTTGTTGAGGAGATAAATGGAAACAATTATGTTTACATAGACCCACACAACCTT
CCTTATGATCACAAATGGGAGTTTCCAGAAACAGGCTGAGTTTTGGGAAAACCTGGGTGCTGGAGCTTTC
GGGAAGGTTGTTGAGGCAACTGCTTATGGCTTAATTAAGTCAGATGCGGCCATGACTGTCGCTGTAAAGATG
CTCAAGCCGAGTGCCCATTTGACAGAACGGGAAGCCCTCATGTCTGAACCTCAAAGTCCTGAGTTACCTTGGT
AATCATATGAATATGTGAATCTACTTGGAGCCTGCACCATTGGAGGGCCACCTGGTCATTACAGAATAT
TGTTGCTATGGTGATCTTTTGAATTTTTTGAAGAAGAAACGTGATTCTTTATTTGTTCAAAGCAGGAAGAT
CATGCAGAAGCTGCACCTTTATAAGAATCTTCTGCATTCAAAGGAGTCTTCTGCAGCGATAGTACTAATGAG
TACATGGACATGAAACCTGGAGTTTCTTATGTTGTCCTCAACCAAGGCCGACAAAAGGAGATCTGTGAGAATA
GGCTCATACATAGAAGAGATGTGACTCCCGCCATCATGGAGGATGACGAGTTGGCCCTAGACTTAGAAGAC
TTGCTGAGCTTTTCTTACCAGTGGCAAAGGGCATGGCTTTCTCGCCTCCAAGAATTGTATTCACAGAGAC
TTGGCAGCCAGAAATATCTCTTACTCATGGTCGGATCACAAAGATTTGTGATTTTGGTCTAGCCAGAGAC
ATCAAGAATGATTCTAATTATGTGGTTAAAGGAAACGCTCGACTACCTGTGAAGTGGATGGCACCTGAAAGC
ATTTTCAACTGTGTATACACGTTTGAAAGTGACGTCCTGGTCCTATGGGATTTTCTTTGGGAGCTGTTCTCT
TTAGGAAGCAGCCCTATCTGGAATGCCGGTCGATTCTAAGTTCTACAAGATGATCAAGGAAGGCTTCCGG
ATGCTCAGCCCTGAACACGCACCTGCTGAAATGTATGACATAATGAAGACTGTCTGGGATGCAGATCCCCTA
AAAAGACCAACATTCAAGCAAATTGTTGAGCTAATTGAGAAGCAGATTTGAGAGAGCACCAATCATATTTAC
TCCAACCTTAGCAAACCTGCAGCCCCAACCGACAGAAGCCCGTGGTAGACCATTCTGTGCGGATCAATTCTGTC
GGCAGCACCGCTTCTCTCCAGCCTCTGCTTGTGCACGACGATGTC

[0496] The KIT variant may be one which enhances engraftment to the same or a greater level than KIT. This may be determined by any suitable assay. For example, using a transmigration assay or by transplanting genetically engineered HSPCs and determining the extent of engraftment following transplantation.

[0497] The KIT variant may have maintained or increased response to SCF compared to KIT. In some embodiments, the KIT variant has the same or greater binding affinity for SCF compared to KIT. This may be determined by any suitable assay. For example, by using SCF binding and dimerization assays e.g. as described in Lemmon, M. A., et al., 1997. *Journal of Biological Chemistry*, 272(10), pp. 6311-6317.

[0498] A person skilled in the art would be able to generate variants and/or fragments retaining the engraftment enhancing activity of KIT based on conservative substitutions and/or the known structural and functional features of KIT. These are described, for instance in Liu, H., et al., 2007. *The EMBO journal*, 26(3), pp. 891-901.

[0499] In some embodiments, the KIT variant has increased resistance to a KIT-directed antibody or immunotoxin compared to KIT. In some embodiments, the KIT variant has a reduced binding affinity for a KIT-directed antibody or immunotoxin compared to KIT. This may be determined by any suitable assay. For example, using a transmigration assay in the absence or presence of a KIT-directed antibody or immunotoxin or using cell proliferation and c-KIT autophosphorylation assays e.g. as described in Roberts, K. G., et al., 2007. *Molecular cancer therapeutics*, 6(3), pp. 1159-1166.

Cluster of Differentiation 47 (CD47)

[0500] In one aspect, the present invention provides use of CD47 (or a fragment or variant thereof) for increasing engraftment by haematopoietic stem and/or progenitor cells (HSPCs).

[0501] In one aspect, the present invention provides a method for increasing engraftment by haematopoietic stem and/or progenitor cells (HSPCs), wherein the method comprises the step of genetically engineering the HSPCs to express CD47 (or a fragment or variant thereof).

[0502] In one aspect, the present invention provides a population of genetically engineered haematopoietic stem and/or progenitor cells (HSPCs), wherein the HSPCs are genetically engineered to express CD47 (or a fragment or variant thereof).

[0503] In one aspect, the present invention provides a method for haematopoietic stem and/or progenitor cell (HSPC) transplantation comprising the steps:

[0504] (a) providing a population of HSPCs which are genetically engineered to express CD47 (or a fragment or variant thereof); and

[0505] (b) administering the HSPCs to a subject.

[0506] Cluster of differentiation 47 (CD47; also known as integrin-associated protein, IAP) is a transmembrane protein belonging to the immunoglobulin superfamily. CD47 binds thrombospondin-1 (TSP-1) and signal-regulatory protein alpha (SIRPa), and functions as a signal to macrophages. Mouse, rat, bovine and human CD47 have been cloned and show about 70% overall amino acid identity (see e.g. Brown, E. J. and Frazier, W. A., 2001. *Trends in cell biology*, 11(3), pp. 130-135).

[0507] In a preferred embodiment, the CD47 is human CD47. A human CD47 may have an amino acid sequence of UniProtKB Q08722.

[0508] Exemplary CD47 polypeptides are provided by SEQ ID NOs: 23-26. In one embodiment, the CD47 comprises or consists of an amino acid sequence that has at least 70%, at least 80%, at least 85%, at least 90%, at least 95%,

at least 96%, at least 97%, at least 98%, at least 99% or 100% identity to any of SEQ ID NOs: 23-26, preferably wherein the amino acid sequence substantially retains the engraftment enhancing activity of the protein represented by SEQ ID NOs: 23-26, respectively.

[0509] In one embodiment, the amino acid sequence of CD47 is:

Exemplary CD47

(SEQ ID NO: 23)
MWPLVAALLLGSACCGSAQLLFNKTKEVEFTFCNDTVVIPCFTVNMEAQNTTEVYVKKFKGRDIYTFDGL
NKSTVPTDESSAKIEVSQLLKGDASLKMDKSDAVSHTGNYTCEVTELTREGETIIEELKYRVVSWESPENIL
IVIFPIFAILLFWGQFGIKTLKYRSGMDEKTIALLVAGLVITVIVIVGAILFVPGEYSLKNATGLGLIVTS
TGILILLHYVVFSTAIGLTSFVIAILVIQVIAYILAVVGLSLCIAACIPMHGPLLISGLSILALAQLLGLVY
MKFVASNQKTIQPPRKAVEEPLNAFKESKGMNDE

[0510] In another embodiment, the amino acid sequence of CD47 is:

Exemplary CD47

(SEQ ID NO: 24)
MWPLVAALLLGSACCGSAQLLENKTKEVEFTFCNDTVVIPCFTVNMEAQNTTEVYVKKFKGRDIYTFDGL
NKSTVPTDESSAKIEVSQLLKGDASLKMDKSDAVSHTGNYTCEVTELTREGETIIEELKYRVVSWFSPENIL
IVIFPIFAILLFWGQFGIKTLKYRSGMDEKTIALLVAGLVITVIVIVGAILFVPGEYSLKNATGLGLIVTS
TGILILLHYVVFSTAIGLTSFVIAILVIQVIAYILAVVGLSLCIAACIPMHGPLLISGLSILALAQLLGLVY
MKFV

[0511] In another embodiment, the amino acid sequence of CD47 is:

Exemplary CD47

(SEQ ID NO: 25)
MWPLVAALLLGSACCGSAQLLFNKTKEVEFTFCNDTVVIPCFTVNMEAQNTTEVYVKKFKGRDIYTEDGAL
NKSTVPTDESSAKIEVSQLLKGDASLKMDKSDAVSHTGNYTCEVTELTREGETIIEELKYRVVSWFSPENIL
IVIFPIFAILLFWGQFGIKTLKYRSGMDEKTIALLVAGLVITVIVIVGAILFVPGEYSLKNATGLGLIVTS
TGILILLHYVVFSTAIGLTSFVIAILVIQVIAYILAVVGLSLCIAACIPMHGPLLISGLSILALAQLLGLVY
MKFVASNQKTIQPPRNN

[0512] In another embodiment, the amino acid sequence of CD47 is:

Exemplary CD47

(SEQ ID NO: 26)
MWPLVAALLLGSACCGSAQLLFNKTKEVEFTFCNDTVVIPCFTVNMEAQNTTEVYVKKFKGRDIYTEDGAL
NKSTVPTDESSAKIEVSQLLKGDASLKMDKSDAVSHTGNYTCEVTELTREGETIIEELKYRVVSWESPENIL
IVIFPIFAILLFWGQFGIKTLKYRSGMDEKTIALLVAGLVITVIVIVGAILFVPGEYSLKNATGLGLIVTS
TGILILLHYVVFSTAIGLTSFVIAILVIQVIAYILAVVGLSLCIAACIPMHGPLLISGLSILALAQLLGLVY
MKFVASNQKTIQPPRKAVEEPLN

[0513] In a preferred embodiment, the nucleotide sequence encoding the CD47 is codon optimised.

[0514] In one embodiment, the CD47 is encoded by a nucleotide sequence that has at least 70%, 80%, 90%, 95%, 96%, 97%, 98% 99% or 100% identity to SEQ ID NO: 27

or 28, preferably wherein the protein encoded by the nucleotide sequence substantially retains the engraftment enhancing activity of the protein represented by SEQ ID NO: 23.

[0515] In one embodiment, the nucleotide sequence encoding CD47 is:

Exemplary nucleotide sequence encoding CD47

(SEQ ID NO: 27)

```
ATGTGGCCTCTCGTGGCCGCTCTGCTGCTCGGGAGCGCTTGTTCGGCAGCGCCAGCTGCTGTTCACAAA  
ACCAAGTCCGTCGAGTTCACCTTCTGCAACGACACAGTGGTGATCCCTGCTTCGTACCAACATGGAGGCT  
CAGAATACCACCGAGGTCTACGTCAAGTGGAATTCAAGGGCAGAGACATCTACACCTTCGACGGAGCCCTC  
AACAAGAGCACAGTGCCTACCGACTTTTCCAGCGCCAAGATTGAGGTGAGCCAACCTCCTGAAGGGAGACGCC  
AGCCTGAAGATGGACAAGAGCGATGCCGTCAGCCACACAGGAACTACACCTGCGAGGTGACAGAGCTCACC  
AGAGAGGGCGAGACCATCATCGAGCTCAAATACAGAGTGGTGCTGCTGGTTCTCCCCAACGAGAACATCCTC  
ATCGTGATCTTCCCATCTTCGCCATCTGCTGTTCTGGGGCCAGTTCGGCATCAAAACCTGAAGTATAGA  
TCCGGCGGCATGGACGAGAAAACAATCGCCCTGCTGGTGGCCGCCCTCGTGATTACCGTGATCGTCATCGTG  
GGCGCCATCTCTTCGTGCCCGGAGAGTACAGCCTCAAGAACGCCACCGGCCTGGGCTGATTGTGACCTCC  
ACAGGCATTCTGATCTGCTGCACTACTACGTGTTGAGCACAGCCATTGGCCTCACAAGCTTCGTGATCGCC  
ATCCTGGTCATCCAGTGATCGCCTACATCTCGCCGTGGTCGGACTCAGCCTCTGTATTGCCGCTGTCATC  
CCCATGCACGACCCCTCCTGATCTCCGGCCTCAGCATTCTGGCTCTCGCTCAGCTGCTCGGCCTGGTGTAC  
ATGAAGTTCGTGCGCCAGCAACCAGAAGACCATCAACCCCCAGAAAGGCGTCGAAGAGCCTCTGAACGCC  
TTTAAGGAGAGCAAGGCATGATGAACGACGAG
```

[0516] In another embodiment, the nucleotide sequence encoding CD47 is:

Exemplary nucleotide sequence encoding CD47

(SEQ ID NO: 28)

```
ATGTGGCCCTGGTAGCGCGCTGTTGCTGGGCTCGGCGTGCTGCGGATCAGCTCAGCTACTATTTAATAAA  
ACAAAATCTGTAGAATTCACGTTTTGTAATGACACTGTCGTCATTCCATGCTTTGTTACTAATATGGAGGCA  
CAAAACACTACTGAAGTATACGTAAAGTGGAATTTAAAGGAAGAGATATTTACACCTTTGATGGAGCTCTA  
AACAAGTCCACTGTCCCACTGACTTTAGTAGTGCAAAAATTGAAGTCTCACAATTACTAAAAGGAGATGCC  
TCTTTGAAGATGGATAAGAGTGATGCTGTCTCACACAGGAACTACACTTGTAAGTAACAGAATTAACC  
AGAGAAGGTGAAACGATCATCGAGCTAAAATATCGTGTGTTTCATGGTTTCTCCAAATGAAAATATTCTT  
ATTGTTATTTTCCCAATTTTGTCTATACTCCTGTTCTGGGGACAGTTTGGTATTAAACACTTAAATATAGA  
TCCGGTGGTATGGATGAGAAAACAATTGCTTTACTTGTGCTGGACTAGTGATCACTGTCTATTGTCATTGTT  
GGAGCCATTCTTTTCGTCCAGGTGAATATTCATTAAAGAATGCTACTGGCCTTGGTTTAAATGTGACTTCT  
ACAGGGATATTAAATATTACTTCACTACTATGTGTTTAGTACAGCGATTGGATTAACTCCTTCGTCATTGCC  
ATATTGGTTATTAGGTGATAGCCTATATCCTCGCTGTGGTTGGACTGAGTCTCTGTATTGCGGCGTGATATA  
CCAATGCATGGCCCTCTTCTGATTTTCAAGTTTGAAGTATCTAGCTCTAGCACAACTTCTGGACTAGTTTAT  
ATGAAATTTGTGGCTTCCAATCAGAAGACTATACAACCTCCTAGGAAAGCTGTAGAGGAACCCCTTAATGCA  
TTCAAAGAATCAAAGGAATGATGAATGATGAA
```

[0517] The CD47 variant may be one which enhances engraftment to the same or a greater level than CD47. This may be determined by any suitable assay. For example, using a transmigration assay or by transplanting genetically engineered HSPCs and determining the extent of engraftment following transplantation.

[0518] The CD47 variant may have maintained or increased response to its natural ligands (e.g. TSP-1, SIRP α , and/or integrins) compared to CD47. In some embodiments, the CD47 variant has the same or greater binding affinity for its natural ligands compared to CD47. This may be determined by any suitable assay. For example, by using a binding assay.

[0519] A person skilled in the art would be able to generate variants and/or fragments retaining the engraftment enhancing activity of CD47 based on conservative substitutions and/or the known structural and functional features of CD47. These are described, for instance in Fenalti, G., et al., 2021. Nature communications, 12(1), pp. 1-14.

RNA Polynucleotide

[0520] In one aspect, the present invention provides an RNA polynucleotide comprising a protein-coding sequence. Preferably, the protein-coding sequence encodes an engraftment enhancer.

[0521] As used herein, an “RNA polynucleotide” may refer to a polynucleotide which consists substantially of ribonucleotides, which are nucleotides containing ribose as its pentose component. The RNA polynucleotide may be messenger RNA (mRNA).

Structural Elements

[0522] The RNA polynucleotide may comprise one or more structural elements for improving stability and translation efficiency.

[0523] Any suitable structural elements may be used. Modifying mRNA structural elements, particularly the 5' cap, 5'- and 3'-untranslated regions (UTRs), the coding region, and polyadenylation tail, may help improve its intracellular stability and translational efficiency.

[0524] The structural elements may be operably linked to the protein-coding sequence, when appropriate. The term “operably linked” may mean that the components described are in a relationship permitting them to function in their intended manner.

Kozak Sequence

[0525] The RNA polynucleotide of the present invention may comprise a Kozak sequence. Suitably, the protein-coding sequence is operably linked to a Kozak sequence. A Kozak sequence may be inserted before the start codon to improve the initiation of translation.

[0526] Suitable Kozak sequences will be well known to those of skill in the art (see e.g. Kozak, M., 1987. Nucleic acids research, 15(20), pp. 8125-8148).

[0527] In some embodiments, the Kozak sequence comprises or consists of a nucleotide sequence which is at least 80% identical to SEQ ID NO: 38 or a fragment thereof. In some embodiments, the Kozak sequence comprises or consists of the nucleotide sequence SEQ ID NO: 38 or a fragment thereof.

Exemplary Kozak sequence
(SEQ ID NO: 38)
CCACC

eIF4F Aptamer

[0528] The RNA polynucleotide of the present invention may comprise a translation non-blocking eIF4F aptamer. Suitably, the protein-coding sequence is operably linked a translation non-blocking eIF4F aptamer. A translation non-blocking eIF4F aptamer may be inserted in the 5'-UTR to improve the initiation of translation.

[0529] Eukaryotic initiation factor 4F (eIF4F) is a heterotrimeric protein complex that binds the 5' cap of mRNAs to promote translation initiation. The eIF4F complex is composed of three non-identical subunits: the DEAD-box RNA helicase eIF4A, the cap-binding protein eIF4E, and the large “scaffold” protein eIF4G.

[0530] A “translation non-blocking eIF4F aptamer” may refer to an aptamer sequence which binds to eIF4F complex but does not inhibit translation. In some embodiments, a translation non-blocking eIF4F aptamer promotes initiation of translation. Suitable translation non-blocking eIF4F aptamers are described in WO 2019/081383A1.

[0531] In preferred embodiments, the translation non-blocking eIF4F aptamer is a translation non-blocking eIF4G aptamer (i.e. the aptamer binds to subunit eIF4G). In some embodiments, the translation non-blocking eIF4F aptamer is a translation non-blocking eIF4A aptamer (i.e. the aptamer binds to subunit eIF4A). In some embodiments, the translation non-blocking eIF4F aptamer is a translation non-blocking eIF4E aptamer (i.e. the aptamer binds to subunit eIF4E).

[0532] Exemplary translation non-blocking eIF4F aptamers are shown in SEQ ID NOs: 33-36.

[0533] In some embodiments, the translation non-blocking eIF4F aptamer comprises or consists of a nucleotide sequence having at least 90%, at least 92%, at least 94%, at least 96%, at least 98%, or 100% identity to any of SEQ ID NOs: 33-36. In some embodiments, the translation non-blocking eIF4F aptamer comprises or consists of the nucleotide sequence of any of SEQ ID NOs: 33-36.

[0534] In some embodiments, the translation non-blocking eIF4F aptamer comprises or consists of a nucleotide sequence having at least 90%, at least 92%, at least 94%, at least 96%, at least 98%, or 100% identity to SEQ ID NO: 34. In some embodiments, the translation non-blocking eIF4F aptamer comprises or consists of the nucleotide sequence of SEQ ID NO: 34.

Exemplary translation non-blocking eIF4G aptamer
(SEQ ID NO: 33)
ACUCACUAUUUGUUUUCGCGCCAGUUGCAAAAGUGUCG

Exemplary translation non-blocking eIF4G aptamer
(SEQ ID NO: 34)
GACUCACUAUUUGUUUUCGCGCCAGUUGCAAAAGUGUCG

Exemplary translation non-blocking eIF4G aptamer
(SEQ ID NO: 35)
UCCGCGGCGCCAUCUCAUGUUUAGUUGUCCUAUGUCGAGC

Exemplary translation non-blocking eIF4G aptamer
(SEQ ID NO: 36)
UCCGUAGAAACGCGUUAAGGUGAAAGUUUGAGGCGUCCUCA

Woodchuck Hepatitis Virus Post-Transcriptional Regulatory Element (WPRE)

[0535] The RNA polynucleotide of the present invention may comprise a woodchuck hepatitis virus post-transcriptional regulatory element (WPRE). Suitably, the protein-coding sequence is operably linked to a WPRE. A WPRE may be inserted in the 3'UTR to improve the initiation of translation.

[0536] Suitable WPRE sequences will be well known to those of skill in the art (see e.g. Zufferey, R., et al., 1999. *Journal of virology*, 73(4), pp. 2886-2892; and Zanta-Bous-sif, M. A. et al., 2009. *Gene therapy*, 16(5), pp. 605-619). Suitably, the WPRE is a wild-type WPRE or is a mutant WPRE. For example, the WPRE may be mutated to abrogate translation of the woodchuck hepatitis virus X protein (WHX) e.g. by mutating the WHX ORF translation start codon.

[0537] In some embodiments, the WPRE comprises or consists of a nucleotide sequence which is at least 70% identical to SEQ ID NO: 37 or a fragment thereof. Suitably, the WPRE comprises or consists of a nucleotide sequence which is at least 75%, at least 80%, at least 85%, at least 90%, at least 95%, at least 96%, at least 97%, at least 98%, at least 99%, or 100% identical to SEQ ID NO: 37 or a fragment thereof.

[0538] In some embodiments, the WPRE comprises or consists of the nucleotide sequence SEQ ID NO: 37 or a fragment thereof.

Exemplary WPRE

(SEQ ID NO: 37)

```
AAUCAACCUCUGGAUUAACAAAUUUGUGAAAGAUUGACUGGUAUUUUAACUAUGUUGCUCUUUACG
CUAUGUGGAUACGCUGCUUUAAGCCUUUGUAUCAUGCUAUUGCUUCCCGUAUGGCUUUCAUUUUUCUC
UCCUUGUAUAAAUCCUGGUUGCUGUCUUUAUGAGGAGUUGUGGCCCGUUGUCAGGCAACGUGGCGUG
GUGUGCACUGUUGUUGCUGACGCAACCCCCACUGGUUGGGGCAUUGCCACCCACUGUCAGCUCCUUUCC
GGGACUUUCGCUUUCUUUUUUUUUUUUUUUUUUUUUUUUUUUUUUUUUUUUUUUUUUUUUUUUUUUUUU
ACAGGGGCUUGGCUUUGGGCACUGACAAUUCUGUGGUGUUGUGUGGGGAAUUAUCGUGCCUUUUCUUGG
CUGCUCGCGCUGUGUUGCCACCUUGGAUUCUGCGCGGACGUCUUCUGCUACGUCUUUUGGCGCCUCAAU
CCAGCGGACCUUCCUUUUUUUUUUUUUUUUUUUUUUUUUUUUUUUUUUUUUUUUUUUUUUUUUUUUUU
CAGACGAGUCGGAUCUCCUUUGGGCCGCCUCCCGCCUG
```

Polyadenylation Tail

[0539] The RNA polynucleotide of the present invention may comprise a polyadenylation (poly(A)) tail. Suitably, the protein-coding sequence is operably linked to a poly(A) tail.

[0540] A poly(A) tail typically consists of multiple adenosine monophosphates and is found at the 3' end of mRNA. A poly(A) tail may be important for the nuclear export, translation and stability of mRNA. Although a poly(A) tail typically consists of multiple adenosine monophosphates, other adenosine monophosphate derivatives may be present (see e.g. Strzelecka, D., et al., 2020. *RNA*, 26(12), pp. 1815-1837).

[0541] In some embodiments, the polyA tail is at least about 100, at least about 110, at least about 120, at least about 130, at least about 140, or at least about 150 nucleotides in length. In some embodiments, the polyA tail is about 100 to about 150, about 110 to about 150, or about 120 to

about 150 nucleotides in length. In some embodiments, the polyA tail is about 120 nucleotides in length.

[0542] In some embodiments, the polyA tail consists of (A)_x wherein x≥100, x≥110, x≥120, x≥130, x≥140, or x≥150. In some embodiments, the polyA tail consists of (A)_x wherein x=100±5, x=110±5, x=120±5, x=130±5, x=140±5, or x=150±5. In some embodiments, x=120±5.

5' Cap

[0543] The RNA polynucleotide of the present invention may comprise a 5' cap.

[0544] A 5' cap is a specially altered nucleotide on the 5' end of some primary transcripts such as precursor messenger RNA that may allow for stable and mature messenger RNA to undergo translation during protein synthesis.

[0545] Typically, a 5' cap may consist of a guanine nucleotide connected to mRNA via an unusual 5' to 5' triphosphate linkage. This guanosine may be methylated on the 7 position directly after capping and is referred to as a 7-methylguanylate cap, abbreviated m7G. Further modifications exist including the methylation of the 2' hydroxy-groups of the first 2 ribose sugars of the 5' end of the mRNA. RNA polynucleotides may be capped co-transcriptionally by using a cap analog or separately using a capping enzyme.

[0546] In some embodiments, the RNA polynucleotide of the present invention comprises a 5' cap analogue. Cap analogues can allow for: (i) high incorporation efficiencies when added to IVT, (ii) correct orientation when incorpo-

rated into RNA, (iii) strong binding to the cap-binding protein eIF4E, (iv) inhibitory potential when added as competitor in an in vitro translation assay and (v) high translation efficiency of resulting capped RNA. Standard cap analogues include m⁷GpppG and GpppG (see e.g. Muttach, F., et al., 2017. *Beilstein journal of organic chemistry*, 13(1), pp. 2819-2832). Suitable 5' cap analogues include G(5')ppp(5')G, m⁷G(5')ppp(5')G, 3'-O-Me-m⁷G(5')ppp(5')G, m₃^{2,2',7}G(5')ppp(5')G, m₂^{7,3'io}G(5')ppp(5')G, G(5')ppp(5')A, m⁷G(5')ppp(5')A, m⁷G(5')ppp(5')(2'OMeA)pG, and the like.

[0547] In some embodiments, the RNA polynucleotide of the present invention comprises a 5' cap comprising or consisting of m⁷G(5')ppp(5')(2'OMeA)pG. This 5' cap may be commercially available as the CleanCap® Reagent AG.

Modified Nucleobases

[0548] The RNA polynucleotide of the present invention may comprise one or more modified nucleobases.

[0549] RNA polynucleotides typically comprise the four canonical bases guanine, uracil, adenine, and cytosine, but these bases and attached sugars can be modified in numerous ways. There are more than 100 naturally occurring modified nucleosides (see e.g. Cantara, W. A., et al., 2010. *Nucleic acids research*, 39(suppl_1), pp. D195-D201). Modified bases can be introduced during in vitro transcription using modified nucleotides in place of canonical nucleotides.

[0550] In some embodiments, the RNA polynucleotide of the present invention comprises one or more modified nucleobase. Suitably, all of the guanines are replaced with modified guanine (i.e. the only guanine present in the RNA polynucleotide is modified), all of the uracils are replaced with modified uracil (i.e. the only uracil present in the RNA polynucleotide is modified), all of the adenines are replaced with modified adenine (i.e. the only adenine present in the RNA polynucleotide is modified), and/or all of the cytosines are replaced with modified cytosine (i.e. the only cytosine present in the RNA polynucleotide is modified).

[0551] In some embodiments, the RNA polynucleotide of the present invention comprises one or more modified nucleoside. Suitably, all of the guanosines are replaced with modified guanosine (i.e. the guanosine uracil present in the RNA polynucleotide is modified), all of the uridines are replaced with modified uridine (i.e. the only uridine present in the RNA polynucleotide is modified), all of the adenosines are replaced with modified adenosine (i.e. the only adenosine present in the RNA polynucleotide is modified), and/or all of the cytidines are replaced with modified cytidine (i.e. the only cytidine present in the RNA polynucleotide is modified).

[0552] In some embodiments, the RNA polynucleotide of the present invention comprises modified guanine. In some embodiments, all of the guanines are replaced with modified guanine. In some embodiments, the RNA polynucleotide of the present invention comprises modified guanosine. In some embodiments, all of the guanosines are replaced with modified guanosine. Suitable modified guanosines will be known to those of skill in the art.

[0553] In some embodiments, the RNA polynucleotide of the present invention comprises modified uracil. In some embodiments, all of the uracils are replaced with modified uracil. In some embodiments, the RNA polynucleotide of the present invention comprises modified uridine.

[0554] In some embodiments, all of the uridines are replaced with modified uridine. Suitable modified uridines will be known to those of skill in the art and include, 5-Methyluridine, 5-Methoxyuridine, Pseudouridine, N1-Methyl-pseudouridine, and 2-thiouridine.

[0555] In some embodiments, the RNA polynucleotide of the present invention comprises modified adenine. In some embodiments, all of the adenines are replaced with modified adenine. In some embodiments, the RNA polynucleotide of the present invention comprises modified adenosine. In some embodiments, all of the adenosines are replaced with modified adenosine. Suitable modified adenosines will be known to those of skill in the art and include N1-methyl-adenosine and N6-methyl-adenosine.

[0556] In some embodiments, the RNA polynucleotide of the present invention comprises modified cytosine. In some embodiments, all of the cytosines are replaced with modified cytosine. In some embodiments, the RNA polynucleotide of

the present invention comprises modified cytidine. In some embodiments, all of the cytidines are replaced with modified cytidine.

[0557] Suitable modified cytidines will be known to those of skill in the art and include 5'-methyl-cytidine.

[0558] In some embodiments, the RNA polynucleotide of the present invention comprises pseudouridine. In some embodiments, all of the uridine is replaced by pseudouridine (i.e. the only uridine present in the RNA polynucleotide is pseudouridine).

[0559] In some embodiments, the RNA polynucleotide of the present invention is nucleoside-modified mRNA. In some embodiments, the RNA polynucleotide of the present invention is pseudouridine-modified mRNA.

Protein-Coding Sequence

[0560] The protein-coding sequence is not particularly limited and may encode any protein of interest.

[0561] The protein-coding sequence may be codon-optimised. For example, the protein-coding sequence may be codon-optimised for expression in a mammalian (e.g. human) cell. Different cells differ in their usage of particular codons. This codon bias corresponds to a bias in the relative abundance of particular tRNAs in the cell type. By altering the codons in the sequence so that they are tailored to match with the relative abundance of corresponding tRNAs, it is possible to increase expression. By the same token, it is possible to decrease expression by deliberately choosing codons for which the corresponding tRNAs are known to be rare in the particular cell type. Thus, an additional degree of translational control is available. Codon usage tables are known in the art for mammalian cells (e.g. humans), as well as for a variety of other organisms.

[0562] In preferred embodiments, the protein-coding sequence encodes an engraftment enhancer.

[0563] The engraftment enhancer may be any disclosed herein. In some embodiments, the engraftment enhancer is selected from CXCR4 (or a fragment or variant thereof), CD47 (or a fragment or variant thereof), ITGA4 (or a fragment or variant thereof), and KIT (or a fragment or variant thereof). In some embodiments, the engraftment enhancer comprises or consists of an amino acid sequence that has at least 70%, at least 80%, at least 85%, at least 90%, at least 95%, at least 96%, at least 97%, at least 98%, at least 99% or 100% identity to any of SEQ ID NOs: 2-9, 23-26, 29 or 31.

[0564] The protein-coding sequence may be any protein coding sequence disclosed herein. In some embodiments, the protein-coding sequence comprises or consists of a nucleotide sequence that has at least 70%, at least 80%, at least 85%, at least 90%, at least 95%, at least 96%, at least 97%, at least 98%, at least 99% or 100% identity to any of SEQ ID NOs: 10-22, 27, 28, 30 or 32 (e.g. wherein "T" is replaced with "U").

C-X-C Chemokine Receptor Type 4 (CXCR4)

[0565] In some embodiments, the engraftment enhancer is CXCR4.

[0566] In some embodiments, the engraftment enhancer comprises or consists of an amino acid sequence that has at least 70%, at least 80%, at least 85%, at least 90%, at least 95%, at least 96%, at least 97%, at least 98%, at least 99% or 100% identity to any of SEQ ID NOs: 2-9.

[0567] In some embodiments, the engraftment enhancer comprises or consists of an amino acid sequence that has at least 70%, at least 80%, at least 85%, at least 90%, at least 95%, at least 96%, at least 97%, at least 98%, at least 99% or 100% identity to SEQ ID NO: 2.

[0568] In some embodiments, the engraftment enhancer comprises or consists of an amino acid sequence that has at least 70%, at least 80%, at least 85%, at least 90%, at least 95%, at least 96%, at least 97%, at least 98%, at least 99% or 100% identity to any of SEQ ID NOs: 3-9.

[0569] In some embodiments, the engraftment enhancer comprises or consists of an amino acid sequence that has at least 70%, at least 80%, at least 85%, at least 90%, at least 95%, at least 96%, at least 97%, at least 98%, at least 99% or 100% identity to any of SEQ ID NOs: 6-9.

[0570] In some embodiments, the protein-coding sequence comprises or consists of a nucleotide sequence that has at least 70%, at least 80%, at least 85%, at least 90%, at least 95%, at least 96%, at least 97%, at least 98%, at least 99% or 100% identity to any of SEQ ID NOs: 10-22 (wherein “T” is replaced with “U”).

[0571] In some embodiments, the protein-coding sequence comprises or consists of a nucleotide sequence that has at least 70%, at least 80%, at least 85%, at least 90%, at least 95%, at least 96%, at least 97%, at least 98%, at least 99% or 100% identity to SEQ ID NO: 12 (wherein “T” is replaced with “U”).

[0572] In some embodiments, the protein-coding sequence comprises or consists of a nucleotide sequence that has at least 70%, at least 80%, at least 85%, at least 90%, at least 95%, at least 96%, at least 97%, at least 98%, at least 99% or 100% identity to any of SEQ ID NOs: 14-22 (wherein “T” is replaced with “U”).

[0573] In some embodiments, the protein-coding sequence comprises or consists of a nucleotide sequence that has at least 70%, at least 80%, at least 85%, at least 90%, at least 95%, at least 96%, at least 97%, at least 98%, at least 99% or 100% identity to any of SEQ ID NOs: 19-22 (wherein “T” is replaced with “U”).

Integrin Alpha-4 (ITGA4)

[0574] In some embodiments, the engraftment enhancer is ITGA4.

[0575] In some embodiments, the engraftment enhancer comprises or consists of an amino acid sequence that has at least 70%, at least 80%, at least 85%, at least 90%, at least 95%, at least 96%, at least 97%, at least 98%, at least 99% or 100% identity to SEQ ID NO: 29.

[0576] In some embodiments, the protein-coding sequence comprises or consists of a nucleotide sequence that has at least 70%, at least 80%, at least 85%, at least 90%, at least 95%, at least 96%, at least 97%, at least 98%, at least 99% or 100% identity to SEQ ID NO: 30 (wherein “T” is replaced with “U”).

Tyrosine-Protein Kinase KIT (KIT)

[0577] In some embodiments, the engraftment enhancer is KIT.

[0578] In some embodiments, the engraftment enhancer comprises or consists of an amino acid sequence that has at least 70%, at least 80%, at least 85%, at least 90%, at least 95%, at least 96%, at least 97%, at least 98%, at least 99% or 100% identity to SEQ ID NO: 31 or 47.

[0579] In some embodiments, the engraftment enhancer comprises or consists of an amino acid sequence that has at least 70%, at least 80%, at least 85%, at least 90%, at least 95%, at least 96%, at least 97%, at least 98%, at least 99% or 100% identity to SEQ ID NO: 31.

[0580] In some embodiments, the protein-coding sequence comprises or consists of a nucleotide sequence that has at least 70%, at least 80%, at least 85%, at least 90%, at least 95%, at least 96%, at least 97%, at least 98%, at least 99% or 100% identity to SEQ ID NO: 32 (wherein “T” is replaced with “U”).

Cluster of Differentiation 47 (CD47)

[0581] In some embodiments, the engraftment enhancer is CD47.

[0582] In some embodiments, the engraftment enhancer comprises or consists of an amino acid sequence that has at least 70%, at least 80%, at least 85%, at least 90%, at least 95%, at least 96%, at least 97%, at least 98%, at least 99% or 100% identity to any of SEQ ID NOs: 23-26.

[0583] In some embodiments, the protein-coding sequence comprises or consists of a nucleotide sequence that has at least 70%, at least 80%, at least 85%, at least 90%, at least 95%, at least 96%, at least 97%, at least 98%, at least 99% or 100% identity to SEQ ID NO: 27 or 28 (wherein “T” is replaced with “U”).

Method of Production

[0584] In one aspect, the present invention provides a method for producing the RNA polynucleotide according to the present invention. In preferred embodiments, the method comprises the step of in vitro transcribing a DNA polynucleotide encoding the RNA polynucleotide according to the present invention.

[0585] In one aspect, the present invention provides a method for producing the RNA polynucleotide according to the present invention, the method comprising:

[0586] (i) providing an in vitro transcription reaction mixture comprising a DNA polynucleotide encoding the RNA polynucleotide, nucleoside triphosphates, and optionally a synthetic cap analog;

[0587] (ii) incubating the in vitro transcription reaction mixture to provide an RNA polynucleotide; and

[0588] (iii) purifying the RNA polynucleotide.

[0589] In one aspect, the present invention provides an in vitro transcription reaction mixture comprising a DNA polynucleotide encoding the RNA polynucleotide of the present invention.

[0590] The in vitro transcription reaction mixture may comprise a DNA polynucleotide encoding the RNA polynucleotide as a template, an RNA polymerase, and nucleoside triphosphates. The DNA polynucleotide may be in the form of a linearised plasmid. The RNA polymerase may be a T7 RNA polymerase. The nucleoside triphosphates may consist of adenosine triphosphate, guanosine triphosphate, cytidine triphosphate and uridine triphosphate, or modified versions thereof.

[0591] In some embodiments, the in vitro transcription reaction mixture comprises a modified nucleoside triphosphate. In some embodiments, the in vitro transcription reaction mixture comprises a modified uridine, preferably pseudouridine. In some embodiments, the nucleoside tri-

phosphates consist of adenosine triphosphate, guanosine triphosphate, cytidine triphosphate and pseudouridine triphosphate.

[0592] In some embodiments, the method comprises a step of capping the RNA polynucleotide. The RNA polynucleotide may be capped enzymatically at the end of the in vitro transcription reaction or as a synthetic cap analog during the in vitro transcription reaction. In some embodiments, the in vitro transcription reaction mixture comprises a synthetic cap analog. In some embodiments, the synthetic cap analog is m⁷G(5')ppp(5')(2'OMeA)pG.

[0593] The in vitro transcription reaction mixture may comprise any other suitable reagents such as an RNase inhibitor, an inorganic pyrophosphatase, a transcription buffer, and the like.

[0594] The in vitro transcription reaction mixture may be incubated under conditions suitable for transcribing the DNA polynucleotide to produce the RNA polynucleotide. Any suitable conditions may be used, for example about 37° C. for about 1-4 hours or about 37° C. for about 2-3 hours.

[0595] In some embodiments, the method comprises a step of purifying the RNA polynucleotide. Any suitable method for purifying the RNA polynucleotide may be used, including silica-based purification and/or high-performance liquid chromatography purification.

Exemplary RNA Polynucleotides

[0596] In one aspect, the present invention provides a RNA polynucleotide comprising from 5' to 3': a translation non-blocking eIF4F aptamer; optionally a Kozak sequence; a protein-coding sequence; and a WPRE.

[0597] In one aspect, the present invention provides a RNA polynucleotide comprising from 5' to 3': a translation non-blocking eIF4F aptamer; optionally a Kozak sequence; a protein-coding sequence; a WPRE; and a polyA tail comprising at least about 100 nucleotides.

[0598] In one aspect, the present invention provides a RNA polynucleotide comprising from 5' to 3': a m⁷G(5')ppp(5')(2'OMeA)pG cap; a translation non-blocking eIF4F aptamer; optionally a Kozak sequence; a protein-coding sequence; a WPRE; and a polyA tail comprising at least about 100 nucleotides.

[0599] In one aspect, the present invention provides a RNA polynucleotide comprising from 5' to 3': a translation non-blocking eIF4F aptamer; optionally a Kozak sequence; a protein-coding sequence encoding an engraftment enhancer; and a WPRE.

[0600] In one aspect, the present invention provides a RNA polynucleotide comprising from 5' to 3': a translation non-blocking eIF4F aptamer; optionally a Kozak sequence; a protein-coding sequence encoding an engraftment enhancer; a WPRE; and a polyA tail comprising at least about 100 nucleotides.

[0601] In one aspect, the present invention provides a RNA polynucleotide comprising from 5' to 3': a m⁷G(5')ppp(5')(2'OMeA)pG cap; a translation non-blocking eIF4F aptamer; optionally a Kozak sequence; a protein-coding sequence encoding an engraftment enhancer; a WPRE; and a polyA tail comprising at least about 100 nucleotides.

[0602] The RNA polynucleotide may comprise any other suitable elements, for example linker sequences. In some embodiments, the RNA polynucleotide comprises one or more linker sequences. Suitably a linker sequence is from 1 to 100, from 1 to 50, from 1 to 40, from 1 to 30, from 1 to 20, or from 1 to 10 nucleotides in length.

[0603] Exemplary RNA polynucleotides are provided below in SEQ ID NOs: 39-46. In some embodiments, the RNA polynucleotide comprises or consists of a nucleotide sequence having least 70%, at least 75%, at least 80%, at least 85%, at least 90%, at least 95%, at least 96%, at least 97%, at least 98%, at least 99% or 100% identity to any of SEQ ID NOs: 39-46. In some embodiments, the RNA polynucleotide comprises or consists of the nucleotide sequence of any of SEQ ID NOs: 39-46.

[0604] In one aspect, the present invention provides a RNA polynucleotide comprising or consisting a nucleotide sequence having least 70%, at least 75%, at least 80%, at least 85%, at least 90%, at least 95%, at least 96%, at least 97%, at least 98%, at least 99% or 100% identity to any of SEQ ID NOs: 39-46.

[0605] In one aspect, the present invention provides a RNA polynucleotide comprising or consisting of the nucleotide sequence of any of SEQ ID NOs: 39-46.

Exemplary RNA polynucleotide encoding CXCR4 WT

(SEQ ID NO: 39)

```
UAAUACGACUCACUAUAAGGACUCACUAUUUGUUUUCGCGCCAGUUGCAAAAAGUGUGCCACCAUGG
AAGGCAUCAGCAUCUACACAGCGACAACUACACCGAGGAAUUGGCGCGCGACUACGACAGCAUGA
AGGAACCCUGCUUCCGGGAAGAGAAGCGCAACUUAACAAGAUCUCCUGCCCAAAUCUACAGCAUCA
UCUUUCUGACCCGGCAUCGUGGGCAACGGACUCGUGAUCCUCGUGAUGGGCUACAGAAAAAGCUGCGGA
GCAUGACCGACAAGUACCGGCGUACCGUGAGCGUGGCGACCGUGUGUUCGUGAUCACCCUGCCUUUCU
GGGCGGUGGACGCCGUGGCCAAUUGGUACUUCGGCAACUUCUGUGCAAGGCGGUGACGUGAUCUACA
CAGUGAACCGUGUACAGCAGCGUGUGAUCUCCUGGCCUUCAUCAGCCUGGACAGAUACCCUGGCCAUCGUGC
ACGCCACCAACAGCCAGCGGCCUAGAAAGCUGUGGCCGAGAAGGUGGUGUACGUGGGCGUGUGGAUUC
CCGCCCGUGUGUGACCAUCCCGACUUCUUCUCCGCAACGUGUCCGAGGCCGACGACCGGUACAUUCU
GCGACCGGUUCUACCCCAACGACUUGUGGGUGGUGGUUCAGUUCAGCAUCAUUGGUGGACUGA
UCCUGCCUGGCAUCGUGAUUCUGAGCUGCUACUGCAUCAUCAAGCAAGCUGAGCCACAGCAAGGGCC
```

-continued

ACCAGAAGCGGAAGGCCUGAAAACCCGUGAUCCUGAUUCUGGCUUUUUCGCCUGCUGGCUGCCCU
ACUACAUCGGCAUCAGCAUCGACAGCUUCAUCCUGCUGGAAUACAUCAGCAGGGCUGCGAGUUCGAGA
ACACCGUGCACAAGUGGAUCAGCAUUAACGAGGCCUGGCCUUUUUCCACUGCUGCCUGAACCCUAUCC
UGUACGCCUUCUGGGCGCCAAGUUAAGACCUCUGCCAGCACGCCUGACCAGCGUGUCCAGAGGAA
GCAGCCUGAAGAUCCUGAGCAAGGGCAAGAGAGGCGGCCACAGCUCGUGUCUACAGAGAGCGAGAGCA
GCAGCUUCCACAGCAGCUGAAUACAACCUCUGGAUUACAAAUUUGUGAAAGAUUGACUGGAUUUCUUA
ACUAUGUUGCUCUUUACGCUAUGUGGAUACGCUUUAAUGCCUUUGUAUCAUGCUAUUGCUUCCC
GUAUGGCUUUCAUUUUCUCCUUGUAUAAAUCUGGUUGCUGUCUUAUGAGGAGUUGUGGCCCG
UUGUCAGGCAACGUGGCUGGUGUGCAGUGUUUGCUGACGCAACCCCCACUGGUUGGGCAUUGCCA
CCACCUGCAGCUCUUUCCGGGACUUUCGCUUUCCCCUCCUAUUGCCACGGCGGAACUCAUCGCCG
CCUGCCUUGCCCGCUGCUGGACAGGGGCUCGGCUGUUGGGCACUGACAAUCCGUGGUGUUGCGGGGA
AAUACAUCGUCUUUCCUUGGCUGCUCGCCUGGUUGCCACCUGGAUUUCGCGCGGACGUCUUUCUGCU
ACGUCCCUUGGCCCUCAAUCCAGCGGACCUUCCUUCGCGGCCUGCUGCCGGCUUGCGGGCCUUC
CGCGUUCUGCCUUCGCCUCAGACGAGUCGGAUCUCCUUUGGGCCGCCUCCCGCCUGUAAUAAA
AA
AA
Exemplary RNA polynucleotide encoding CXCR4 V160L (SEQ ID NO: 40)
UAAUACGACUCACUAUAAGGACUCACUAUUUGUUUUCGCGCCAGUUGCAAAAAGUGUCGCCACCAUGG
AAGGCAUCAGCAUCUACACCAGCGACAACUACACCGAGGAAUUGGGCAGCGGCAGCUACGACAGCAUGA
AGGAACCCUGCUUCCGGGAAGAGAAGCGCAACUUAACAAGAUUCCUGCCCAUAUCAAGCAUCA
UCUUUCUGACCGGCAUCGUGGCAACGGACUCGUAUCCUGGAUGGGCUACCAGAAAAAGCUGCGGA
GCAUGACCGACAAGUACCGGCUGCCUGAGCGUGGCCGACCUGCUGUUCGUAUACCCUGCCUUUCU
GGCCCGUGGACGCCUGGCCAAUUGGUACUUCGGCAACUCCUGUGCAAGGCCGUGCACGUAUCUACA
CAGUGAACCUGUACAGCAGCGUGCUGAUCCUGGCCUUAUCAGCCUGGACAGAUACUGGCCAUCGUGC
ACGCCACCAACAGCCAGCGGCCUAGAAAGCUGCUGGCCGAGAAGGUGGUACGUGGGCCUGUGGAUUC
CCGCCUGCUGCUGACCAUCCCGACUUCUUAUCUUCGCCAACGUGUCCGAGGCCGACGCCGUACAUUC
GCGACCGGUUUAACCCCAACGACCUGUGGGUGGUGGUUCCAGUUCAGCAUCAUGGUGGGACUGA
UCCUGCCUGGCAUCGUAUUCUGAGCUGCUACUGCAUCAUCAAGCUGAGCCACAGCAAGGGCC
ACCAGAAGCGGAAGGCCUGAAAACCCGUGAUCCUGAUUCUGGCUUUUUCGCCUGCUGGCUGCCCU
ACUACAUCGGCAUCAGCAUCGACAGCUUCAUCCUGCUGGAAUACAUAAGCAGGGCUGCGAGUUCGAGA
ACACCGUGCACAAGUGGAUCAGCAUUAACGAGGCCUGGCCUUUUUCCACUGCUGCCUGAACCCUAUCC
UGUACGCCUUCUGGGCGCCAAGUUAAGACCUCUGCCAGCACGCCUGACCAGCGUGUCCAGAGGAA
GCAGCCUGAAGAUCCUGAGCAAGGGCAAGAGAGGCGGCCACAGCUCGUGUCUACAGAGAGCGAGAGCA
GCAGCUUCCACAGCAGCUGAAUACAACCUCUGGAUUACAAAUUUGUGAAAGAUUGACUGGAUUUCUUA
ACUAUGUUGCUCUUUACGCUAUGUGGAUACGCUUUAAUGCCUUUGUAUCAUGCUAUUGCUUCCC
GUAUGGCUUUCAUUUUCUCCUUGUAUAAAUCUGGUUGCUGUCUUAUGAGGAGUUGUGGCCCG
UUGUCAGGCAACGUGGCUGGUGUGCAGUGUUUGCUGACGCAACCCCCACUGGUUGGGCAUUGCCA
CCACCUGCAGCUCUUUCCGGGACUUUCGCUUUCCCCUCCUAUUGCCACGGCGGAACUCAUCGCCG
CCUGCCUUGCCCGCUGCUGGACAGGGGCUCGGCUGUUGGGCACUGACAAUCCGUGGUGUUGCGGGGA

-continued

AAUCAUCGUCUUUCCUUGGCUGUCGCGCCUGUGUUGCCACUGGAUUCUGCGCGGGACGUCCUUCUGCU
ACGUCCCUUGCGCCCUCAAUCCAGCGGACCUUCCUCCCGCGGCCUGUCGCGGCUCUGCGGCCUUCU
CGCGUCUUCGCCUUCGCCUCAGACGAGUCGGAUCUCCUUGGGCCGCCUCCCGCCUGUUAUUA
AA
AA

Exemplary RNA polynucleotide encoding CXCR4 A175F

(SEQ ID NO: 41)

UAAUACGACUCACUAUAAGGACUCACUAUUUGUUUUCGCGCCAGUUGCAAAAAGUGUCGCCACCAUGG
AAGGCAUCAGCAUCUACACAGCGACAACUACACGAGGAAUGGGCAGCGGCACUACGACAGCAUGA
AGGAACCCUGCUUCCGGGAAGAGAAGCAACUUCACAAAGAUUCCUGGCCACAAUCUACAGCAUCA
UCUUUCUGACCGGCAUCGUGGGCAACGGACUCGUGAUCUUGUGGCUACAGAAAAAGCUGCGGA
GCAUGACCGACAAGUACCGGCUGCACCUGAGCGUGGCCGACCUGCUGUUCGUGAUCACCCUGCCUUUC
GGGCCGUGGACGCGCGUGGCCAAUUGGUACUUCGGCAACUCCUGUGCAAGGCCGUGCAGUGAUCUACA
CAGUGAACCUGUACAGCAGCGUGCUGAUCUUGGCCUUCUACAGCCUGGACAGAUACUUGGCCAUCGUGC
ACGCCACCAACAGCCAGCGGCCUAGAAAGCUGCUGGCCGAGAGGUGUGUACGUGGGCGUGUGGAUUC
CCGCCUCUGCUGACCAUCCCGCAUCUACUUCUUAACUGUCCGAGGCCGACGACCGGUACAUCU
GCGACCGGUUCUACCCCAACGACCUGUGGGUGGUGGUUCCAGUUCAGCACAUCAUGGUGGGACUGA
UCCUGCCUGGCAUCUGAUUCUGAGCUGCUACUGCAUCAUCAUCAGCAAGCUGAGCCACAGCAAGGGCC
ACCAGAAGCGGAAGGCCUGAAACACCGUGAUCUGAUUCUGGCUUUCUUGCCUGCUGGCCUCCU
ACUACAUCGGCAUCAGCAUCGACAGCUCAUCCUGCUGGAAUACAAGCAGGGCUGCGAGUUCGAGA
ACACCGUGCACAAGUGGAUCAGCAUACCGAGGCCUGGCCUUUUUCCACUGCUGCCUGAACCCUAUCC
UGUACGCCUUCUGGGCGCCAAAGUUAAGACUUCUGCCAGCACGCCUGACCAGCGUGUCCAGAGGAA
GCAGCCUGAAGAUCUGAGCAAGGGCAAGAGAGGCCGACAGCUCCGUGUCUACAGAGAGCGAGAGCA
GCAGCUUCCACAGCAGCUGAAUACAACCUUGGAUUAACAAAUUUGGAAAGAUUGACUGGUAUUCUUA
ACUAUGUUGUCUUUUACGCUAUGUGGAUACGCGUUAUUGCCUUAUGUAUCAUGCUAUGUCCUCC
GUAUGGCUUUAUUAUUCUCCUUGUAUAAAUCUUGGUUGCUGUCUUAUAGAGGAGUUGUGGCCCG
UUGUCAGGCAACUGGCUGUGGUGGACUGUGUUGCUGACGCAACCCACUGGUUGGGCAUUGCCA
CCACCUUGCAGCUCUUUCCGGGACUUUCGCUUCCCCUCCUUAUUGCCACGGCGGAACUACGCGG
CCUGCCUUGCCCGCUGCUGGACAGGGGCUCCGCGUUGGGCACUGACAAUCCGUGGUGUUGCGGGGA
AAUCAUCGUCUUUCCUUGGCUGUCGCGCUGUGUUGCCACUGGAUUCUGCGCGGGACGUCCUUCUGCU
ACGUCCCUUGCGCCCUCAAUCCAGCGGACCUUCCUCCCGCGGCCUGUCGCGGCUCUGCGGCCUUC
CGCGUCUUCGCCUUCGCCUCAGACGAGUCGGAUCUCCUUGGGCCGCCUCCCGCCUGUUAUUA
AA
AA

Exemplary RNA polynucleotide encoding CXCR4 Q200A

(SEQ ID NO: 42)

UAAUACGACUCACUAUAAGGACUCACUAUUUGUUUUCGCGCCAGUUGCAAAAAGUGUCGCCACCAUGG
AAGGCAUCAGCAUCUACACAGCGACAACUACACGAGGAAUGGGCAGCGCGACUACGACAGCAUGA
AGGAACCCUGCUUCCGGGAAGAGAAGCAACUUCACAAAGAUUCCUGGCCACAAUCUACAGCAUCA
UCUUUCUGACCGGCAUCGUGGGCAACGGACUCGUGAUCUUGUGGCUACAGAAAAAGCUGCGGA
GCAUGACCGACAAGUACCGGCUGCACCUGAGCGUGGCCGACCUGCUGUUCGUGAUCACCCUGCCUUUCU

-continued

GGGCCGUGGACGCCGUGGCCAAUUGGUACUUCGGCAACUUCUGUGCAAGGCCGUGCACGUGAUCUACA
CAGUGAACUGUACAGCAGCGUGUGAUCUGGCCUUCUACAGCCUGGACAGAUACCUGGCCAUCGUGC
ACGCCACCAACAGCCAGCGGCCUAGAAAGCUGCUGGCCGAGAAGGUGGUGUACGUGGGCGUGUGGAUUC
CCGCCCUGCUGUGACCAUCCCGACUUCUACUUCGCCAACGUGUCCGAGGCCGACGACCGGUACAUCU
GCGACCGGUUCUACCCCAACGACCUGUGGGUGGUGGUGUUCGCGUUCAGCACAUCAUGGUGGGACUGA
UCCUGCCUGGCAUCGUGAUUCUGAGCUGCUACUGCAUCAUCAAGCAAGCUGAGCCACAGCAAGGGCC
ACCAGAAGCGGAAGGCCUGAAAACACCGUGAUCUGAUUCUGGCUUUCUUCGCCUGCUGGCUGCCCU
ACUACAUCGGCAUCAGCAUCGACAGCUUCAUCUGCUGGAAUACAAGCAGGGCUGCGAGUUCGAGA
ACACCGUGCACAAGUGGAUCAGCAUUAACGAGGCCUGGCCUUUUUCCACUGCUGCCUGAACCCUAUCC
UGUACGCCUUCUGGGCGCCAAGUUCAGACCUCUGCCAGCACGCCUGACCAGCGUGUCCAGAGGAA
GCAGCCUGAAGAUCUGAGCAAGGGCAAGAGAGGCGGCCACAGCUCUGUACACAGAGAGCGAGAGCA
GCAGCUUCCACAGCAGCUGAAUACAACCUUGGAUUACAAAUUUGUGAAAGAUUGACUGGUAUUCUUA
ACUAUGUUGCUUUUACGCUAUGUGGAUACGCGCUUUAUUGCCUUGUAUCAUGCUAUGCUUCCC
GUAUGGCUUUCAUUUUCUCCUUGUAUAAUCCUGGUUGCUGUCUUAUGAGGAGUUGUGGCCCG
UUGUCAGGCAACGUGGCUGGUGUGCACUGUUGUGCUGACGCAACCCCCACUGGUUGGGGCAUUGCCA
CCACCUUGCAGCUCUUCGCGGACUUUCGCUUCCCCCUCCUAUUGCCACGGCGGAACUACGCGCG
CCUGCCUUGCCCGCUGCUGGACAGGGGCUCCGUGUUGGACACUGACAAUCCGUGGUGUUGCGGGGA
AAUCAUCGUCUUUCCUUGGCUGCUGCGCCUGUUGCCACCGGAUUCUGCGCGGACGUCUUCUGCU
ACGUCCUUCGCGCCUCAUCCAGCGGACCUUCCUUCGCGGCCUGCUGCCGGCUUGCGGCCUUCUUC
CGCGUCUUCGCUUCGCCCUCAGACGAGUCGGAUCUCCUUGGGCCGCCUCCCCCGCUGUAAUAAA
AA
AA

Exemplary RNA polynucleotide encoding CXCR4 D262N

(SEQ ID NO: 43)

UAAUACGACUCACUAUAAAGGACUCACUAUUUGUUUCGCGCCAGUUGCAAAAAGUGUCGCCACCAUGG
AAGGCAUCAGCAUCUACACCAGCGACAACUACACCGAGGAAAUGGGCAGCGGCAGCUACGACAGCAUGA
AGGAACCCUGCUUCGCGGAAGAGAACGCCAACUACAACAGAUUUCUGCCACAAUCUACAGCAUCA
UCUUUCUGACCGGCAUCUGGGCAACGGACUCGUGAUCCUGUGAUGGGCUACAGAAAAAGCUGCGGA
GCAUGACCGACAAGUACCGGCUACCCUGAGCGUGGCCGACCUGCUGUUCGUGAUCACCCUGCCUUUCU
GGCCGUGGACGCCGUGGCCAAUUGGUACUUCGGCAACUUCUGUGCAAGGCCGUGCACGUGAUCUACA
CAGUGAACUGUACAGCAGCGUGUGAUCUGGCCUUCUACAGCCUGGACAGAUACCUGGCCAUCGUGC
ACGCCACCAACAGCCAGCGGCCUAGAAAGCUGCUGGCCGAGAAGGUGGUGUACGUGGGCGUGUGGAUUC
CCGCCUGCUGCUGACCAUCCCGACUUCUACUUCGCCAACGUGUCCGAGGCCGACGACCGGUACAUCU
GCGACCGGUUCUACCCCAACGACCUGUGGGUGGUGGUGUCCAGUUCAGCACAUCAUGGUGGGACUGA
UCCUGCUGGCAUCGUGAUUCUGAGCUGCUACUGCAUCAUCAAGCAAGCUGAGCCACAGCAAGGGCC
ACCAGAAGCGGAAGGCCUGAAAACACCGUGAUCUGAUUCUGGCUUUCUUCGCCUGCUGGCUGCCCU
ACUACAUCGGCAUCAGCAUCAACAGCUUCAUCUGCUGGAAUACAAGCAGGGCUGCGAGUUCGAGA
ACACCGUGCACAAGUGGAUCAGCAUUAACGAGGCCUGGCCUUUUUCCACUGCUGCCUGAACCCUAUCC
UGUACGCCUUCUGGGCGCCAAGUUCAGACCUCUGCCAGCACGCCUGACCAGCGUGUCCAGAGGAA
GCAGCCUGAAGAUCUGAGCAAGGGCAAGAGAGGCGGCCACAGCUCUGUUCUACAGAGAGCGAGAGCA

Exemplary RNA polynucleotide encoding CXCR4 H281A

(SEO ID NO: 44)

UAAUACGACUACACUAAAGGACUCACUAAUUGUUUUCGCGCCAGUUGCAAAAAGUGUCGCCACCAUGG
(552 15 NO. 1)
AAGGCAUCAGCAUCUACACCAGCGACAACUACCCGAGGAAUUGGCAGCGGCAGUACGACAGCAUGA
AGGAACCCUGCUUCCGGGAAGAGAACGCCAACUUAACAGAUUUCUGGCCACAAUACAGCAUCA
UCUUUCUGACCGGCAUCGUGGGCAACGGACUCGUGAUCUCUGUAUGGGCUACAGAAAAAGCUGCGGA
GCAUGACCGACAAGUACCGGUGCACCUAGAGCGUGGCCGACCUGCUGUUCGUGAUCACCCUGCCUUUCU
GGGCGCUGGACGCCGUGGCCAAUUGGUACUUCGGCAACUUCUGUGCAAGGCCGUGCAGUGAUCUACA
CAGUGAACUGUACAGCAGCGUGCUGAUCCUGGCCUUAUCAAGCCUGGACAGAUACCUGGCCAUUGUC
ACGCCACCAACAGCCAGCGGCCUAGAAAGCUGUGGCCGAGAAGGUGUGUACGUGGGCGUGUGGAUUC
CCGCCUCUGCUGACCAUCCCGCAUCUAUCUUCGCCAACUGUCCGAGGCCGACGACCGGUACAUCU
GCGACCGGUUCUACCCCAACGACUCUGGGUGUGUGUGUUCAGAUUCAGCACAUCAUGGUGGGACUGA
UCCUGCCUGGCAUCGUGAUUCUGAGCUGCUACUGCAUCAUCAAGCAAGCUGAGCCACAGCAAGGGCC
ACCAGAAGCGGAAGGCCUCGAAAACACCCUGAUCCUGAUUCUGGCUUUCUUCGCCUCUGCGGCCUC
ACUACAUCGGCAUCAGCAUCGACAGCUUACAUCUGCUGGAAAUAUCAAGCAGGGCUGCGAGUUCGAGA
ACACCGUGGCCAAGUGGAUCAGCAUUAACCGAGGCCUGGCUUUUUCACUGCUGCUGAACCCUAUCC
UGUACGCCUUCUGGGCGCCAGUUAAGACCUUGCCAGCACGCCUCGACAGCGUGUCCAGAGGAA
GCAGCCUGAAGAUCCUGAGCAAGGGCAAGAGAGGCGGCCACAGCUCCGUGUCUACAGAGAGCGAGAGCA
GCAGCUUCCACAGCAGCUGAAAUAACCUUGGAUUAACAAAUUGUGAAAGAUUGACUGGUUUUCUUA
ACUAUGUUGCUCCUUUACGCUAUGUGGAUACGCGUCUUAAUGCCUUUGUAUCAUGCUAUUGCUUCCC
GUAUGGCUUUCAUUUUCUCCUCCUGUAUAAUCCUGGUGUGCUGUCUUUAUGAGGAGUUGUGGCCCG
UUGUCAGGCAACGUGGCUGGUGUGCACUGUGUUUGCUGACGCAACCCCCACUGGUUGGGGCAUUGCCA
CCACCUUGCAGCUCUUCUCCGGACUUUCGCUUUCUCCUCCUAUUGCCACGGCGGAACUACUCCCG
CCUGCCUUGCCCGCUGCUGGACAGGGGCUCCGCGUGUGGACACUGACAAUUCUGGUGUGUUGCGGGGA
AAUAUCGUCUCCUUUCUUGGCGUCUCGCGUGUGUCCACCUGGAUUCUGCGCGGGACGUCUUCUUGCU
ACGUCCCUUGGCCUCAAUCCAGCGGACCUCUUCUCCCGCGGCCUGCUGCCGGCUUGCGGCCUCUUC
CGCGUCUUCGCUUCGCCCCUAGACGAGUCGGAUUCUCCUUGGGCCGCCUCCCCCGCUGUAAUUA
AAAAA
AAAAA

-continued

Exemplary RNA polynucleotide encoding ITGA4

(SEQ ID NO: 45)

UAAUACGACUCACUAUAAGGACUCACUAUUUUGUUUUCGCGCCAGUUGCAAAAAGUGUCGCCACCAUGG
CUUGGGAGGUCUGGAGAGAACCUGGACCUAGAAGAGCUGCCGUGCGGGAGACUGUCAUGCUGCUGCUGU
GCCUGGGGUGUCCACAGGCAGACCUUACAACGUGGAUACCGAGAGCGCCUUGCUGUAUCAGGGCCCC
ACAACACCCUGUUUGGCUACUCUGUGGUGCUGCACAGCCACGGCGCCAACCGCUGGCUGCUGGUGGGCG
CCCCCACCGCCAAUUGGCUGGCCAUGCCUCCGUGAUAACCCAGGCGCCAUCUACAGAUGUCGGAUCG
GCAAGAAUCCUGGCCAGACAUGCGAGCAGCUGCAGCUGGGCUCUCCCCAACGGCGAGCCUUGUGGCAAGA
CAUGCCUGGAGGAGAGGGCAAUCAGUGGCUGGGCGUGACACUGAGCAGACAGCCCGCGAGAACGGCU
CCAUCGUGACAUGC GGCCACAAGAUGGAAGAACAUCUUUACAUC AAGAACGAGAAUAAGCUGCCAACAG
GCGGCUGCUAUGGCGUGCCCCAGACCUGAGAACAGAGCUGAGCAAGCGGAUCGCCCCAUGC UACCAGG
AUUAUGUGAAGAAGUUUGGCGAGAAUUUUGCCUCUUGCCAGGCCGGCAUCUCCUCCUUCACACCAAGG
AUCUGAUCGUGAUGGGCGCCCCUGGCUCUCCUAUUGGACAGGCUCUCUGUUCGUGUAUAUAUCACAA
CCAACAAGUACAAGGCCUUCUGGACAAGCAGAACAGGUGAAGUUCGGCUCUUAUCUGGGCUACAGCG
UGGGCGCCGCCAUUUCGGUCUCAGCACACCACAGAGGUGGUGGGCGCGCCCCCAGCACGAGCAGA
UCGGCAAGGCUCUAUCUUCUCCAUCGACGAGAAGGAGCUGAAUAUCCUGCACGAGAUGAAGGGCAAGA
AGCUGGGCUCUACUUUGGCGCCUCCGUGUGCGCCGUGGACCUGAUUGCCGACGGCUUUUCCGACCUGC
UGGUGGGCGCCCCAAUGCAGUCCACAACAGAGAGGAGGGCAGAGUGUUCGUGUAUAUAUAUCCGGCA
GCGGCGCCGUGAUGAAUGCCAUGGAGACCAAUUCUGGUGGCUCGACAAGUAUGCCGCCAGAUUCGGCG
AGAGCAUCGUGAAUCUGGGCGACAUCGACAACGAUGGCUUCGAGGACGUGGCCAUCGGCGCCCCACAGG
AGGAUGACUGCAGGGCGCCAUCUAUAUCUAUAACGGCCGGGCCGACGGCAUCUCUAGCACCUUCUCCC
AGAGAAUCGAGGGCCUGCAGAUACGAAGUCCUGAGCAUGUUCGGCCAGAGCAUCUCCGGCCAGAUUCG
ACGCCGAUAAUAACGGCUACGUGGAUGUGGCCGUGGGCGCCUUUAGAAGCGACUCCGCCGUGCUGCUGA
GAACAAGGCCCGUGUGAUCGUGGAUGCCUCCUGUCUACCCCGAGUCCGUGAAUCGGACAAGUUUG
ACUGCGUGGAGAAUGGCUGGCCAAGCGUGUGCAUCGAUCUGACACUGUGCUUUUCCUAUAAGGGCAAGG
AGGUGCCAGGCUAUAUCGUGCUGUUUACAACAUUGUCUGGAUGUGAAAGAAAGGCCGAGUCCCCC
CAAGAUUCUACUUUCCUUAACGGCACCUUGAUGUGAUCACCGGCUCUAUCAGGUGUCCAGCAGGG
AGGCCAAUUGCAGAACCCACAGGCCUUUAUGCGAAGGAUGUGCGCGACAUCUGACCCCAAUCCAGA
UCGAGGCCGCCUAUCACCUGGGCCCCACGUGAUCUCAAGCGGUCCACCGAGGAGUCCUCCACUGC
AGCCAAUCCUGCAGCAGAAGAAGGAGAAGGACAUCAUGAAGAAGACAAUCAACUUCGCCAGGUUUUGCG
CCCACGAGAACUGUUCCGCGACCGUGCAGGUGUCUGCCAAGAUCCGGCUUCCUGAAGCCCCACGAGACA
AGACAUAUCUGGCCGUGGGCUCCAUGAAGACCUGAUGCUGAACGUGAGCCUGUUUAACGCCGGCGACG
AUGCCUACGAGACAACACUGCACGUGAAGCUGCCAGUGGGCCUGUACUUAUCAAGAUCUGGAGCUGG
AGGAGAAGCAGAUCAACUGUGAGGUGACCGAUAAUCUCCGGCGUGGUGCAGCUGGAUUGCAGCAUCGGCU
AUAUCUACGUGGACCACCUGUCCCGCAUCGACAUCUUAUUCUGCUGGACGUGUCCAGCCUGUCCGGG
CCGAGGAGGACCUGUCCAUACAGUGCACGCCACCUGCGAGAAUGAGGAGGAGAUGGACAACCUGAAGC
ACUCCAGAGUGACAGUGGCCAUCCACUGAAGUACGAGGUGAAGCUGACAGUGCACGGCUUUGUGAAUC
CAACCUCCUUCGUGUACGGCUCCAAUGACGAGAAUGAGCCAGAGACAUGUAUGGUGGAGAAGUAACCC
UGACAUAUACGUGAUAUAACAGGCAAUUCUAUGGCCCUAACGUGAGCGUGGAGAUAUGGUGCCAA
AUUCUUUCAGCCCACAGACAGACAAGCUGUUUAACAUCUGGACGUGCAGACAACCACAGGCGAGUGUC

[illegible]

(SEQ ID NO: 46)

(Seq ID No: 42)

UAAUACGACUCACUAUAGGACUCUAUUUGUUUUCGCGCCAGUUGCAAAAGUGUCGCCACCAUGA
GAGGCGCUCGCGGCGCCUGGGAUUUUCUCUGCGUUCUGCUCUACUGCUUCGCGUCCAGACAGGCUUU
CUCAACCAUCUGUGAGUCCAGGGGAACCGUCCACCAUCCAUCUCCAGGAAAUCAGACUUAUAG
UCCGCGUGGGCGACGAGAUUAGGCUGUUAUGCAGCUAUCGCGGCUUUGUCAAUUGGACUUUUGAGAUCC
UGGAUGAAACGAAUAGAGAAUAAGCAGAAUGAAUGGAUACGGAAGGAGGAGAGCCACCAACACCGGCA
AAUACACGUGCACCACAAACACGGCUUAAAGCAAUCCAUUUAUGUGUUUGUAGAGAUCCUGCCAAAGC
UUUUCCUUGUUGACCGCUCUUGUAUGGGAAGAGAACGACACGCGUGGCCGUCUCUCACAG
ACCCAGAAGUGACCAAUUAUCCCUCAAGGGGUGCCAGGGGAAGCCUUCUCCCAAGGACUUGAGGUUUA
UUCUCGACCCCAGGCGGGCAUCAUGAUCAAAGUGUGAAACGCGCCUACCAUCGGCUCUGUCUCAUU
GUUCUGUGGACCAGGAGGGCAAGUCAGUGCGUCGGAUUAUUAUCUGAAAGUGAGGCCAGCCUUA
AAGCUGUGCCUGUUGUGUCUGUGUCCAAAGCAAGCUAUCUUCUAGGGAAGGGGAAGAAUUCACAGUGA
CGUGCACAUAUAAAGAUUGUGUCUAGUUCUGUGUACUCAACGUGGAAAAGAGAAAACAGUCAGACUAAAC
UACAGGAGAAAUAAUAGCUGGCAUCACGGUGACUUCAAUUAUGAACGUCAGGCAACGUUGACUAUCA
GUUCAGCGAGAGUUAAUGAUUCUGGAGUGUUC AUGUGUUAUGCCAAUAAUACUUUUGGAUCAGCAAUG
UCACAACAACCUUGGAAGUAGUAGAUAAAGGAUUCAUUAAUUAUUCUCCCAUGAUAAACUACAGUAU
UUGUAAACGAUGGAGAAAAUGUAGAUUUGAUUGUUGAAUUGAAGCAUUCUCCCAAACCUGAACACCAGC
AGUGGAUUCUAUUGAACAGAAACCUCAUGAUAAUUGGGAAGAUUAUCCCAAGUCUGAGAAUGAAAGUA
AUUUCAGAUACGUAAUGGAACUUCUUAACGAGAUUAAAGGCACCGAAGGAGGCACUACACAUCC
UAGUGUCCAAUUCUGACGUCAAUGCGCCAUGACAUUUAAGUUAUUGUGAAUACAAAACAGAAAUUC

-continued

UGACUUACGACAGGCUCGUGAAUGGCAUGCUCCAAUGUGUGGCAGCAGGAUUECCAGAGCCCACAAUAG
 AUUGGUUUUUUUGUCCAGGAACUGAGCAGAGAUGCUCUGCUUCUGUACUGCCAGUGGAUGUGCAGACAC
 UAAACUCUACUUGGGCCACCGUUUGGAAAGCUAGUGGUUCAGAGUUUUAUAGAUUCUAGUGCAUUCAAGC
 ACAUUGGCACGGUUGAAUGUAAGGCUUACAACGAUGUGGGCAAGACUUCUGCCUAAUUUAAUUUGCAU
 UUAAGGUAACAACAAGAGCAAAUCCAUCCCCACACCCUGUUCACUCCUUUGCUGAUUGGUUUUCGUAA
 UCGUAGCUGGCAUGAUGUGCAUUUAUUGUGAUGAUUCUGACCUACAAUUAUUUACAGAAACCCAUUGAUG
 AAGUACAGUGGAAGGUUGUUGAGGAGAUAAAUGGAAACAAUUAUGUUUACAUAAGACCCAACAACUUC
 CUUAUGAUCACAAUUGGGAGUUUCCAGAAACAGGCUGAGUUUUGGGAAAACCCUGGGUGCUGGAGCUU
 UCGGGAAGGUUGUUGAGGCAACUGCUUAUGGCUUAAUUAAGUCAGAUUGCGGCAUGACUGUCGUGUAA
 AGAUGCUCAGCCGAGUGCCCAUUUGACAGAACGGGAAGCCCUAUGUCUGAACUCAAGUCCUGAGUU
 ACCUUGGUAAUACAUAGAAUAUUGUGAUCUACUUGGAGCCUGCACC AUUGGAGGGCCACCCUGGUCA
 UUACAGAAUAUUGUUGCUAUGUGAUCUUUUUGAAUUUUUUGAGAAGAAAACUGAUUCAUUUAUUUGUU
 CAAAGCAGGAAGAUCAUGCAGAAAGCUGCACUUUAUAGAAUCUUCUGCAUUCAAAGGAGUCUUCUGCA
 GCGAUAGUACUAUAGAGUACAUGGACAUGAAACUGGAGUUUCUUAUGUUGUCCCAACCAAGGCCGACA
 AAAGGAGAUUCUGAGAAUAGGCUCAUACAUAAGAAAGAGUUGACUCCCGCAUCAUGGAGGAUGACG
 AGUUGGCCCUAGACUUAGAAGACUUGCUGAGCUUUUUAUACAGGUGGCAAGGGCAUGGCUUUCCUCG
 CCUCCAAGAAUUGUAUUCACAGAGACUUGGCAGCCAGAAUAUCCUUCUUAUCUUGGUCGGAUCACAA
 AGAUUUGUAUUUUGGUUAGCCAGAGACAUAAGAAUGAUUCUAAUUAUGUGGUUAAAGGAAACGCUC
 GACUACUGUGAAGUGGAUGGCACCGUAAAGCAUUUUAACUGUGUAUACACGUUUGAAAGUGACGUCU
 GGUCCUAUGGGAUUUUUUCUUUGGAGCUGUUCUCUUUAGGAAGCAGCCCUAUCUUGGAAUGCCGGUCG
 AUUCUAAGUUUCUAAGAUGAUAAGGAAGGCUUCGGAUGCUCAGCCUGAACACGCACCGCUGUGAAA
 UGUUAGACAUAAUGAAGACUUGCUGGGAUGCAGAUCCCUAAAAAGACCAACAUAUCAAAGCAAAUUGUUC
 AGCUAAUUGAGAAGCAGAUUUUAGAGACCAAUCAUAUUUACUCCAAUUAAGCAAAUCGACGCCCCA
 ACCGACAGAAAGCCGUGGUGAGACCAUUCUGUGCGGAUCAUUCUGUGCGCAGCACCGCUUCCUCCUCC
 AGCCUCUGCUUGUGCAGCAGAUUGUCUGAGCGGCCGCGUGCAUCGACAAUCAAACCUUGGAUUACAAAA
 UUUGUGAAAGAUGACUGGUAUUUUAACUAUGUUGCUUUUUACGCUAUGUGGAUACGUGCUUUUA
 UGCCUUUGUAUCAUGCUAUGCUUCCCGUAUGGCUUUAUUUUCUCCUCCUUGUAUAAAUCUGGUUGC
 UGUUCUUUAUGAGGAGUUGUGGCCGUGUCAGGCAACGUGGCGUGUGGCACUGUGUUUGCUGACG
 CAACCCCCACUGGUUGGGGCAUUGCCACCACCUUGCAGCUCCUUUCCGGGACUUUCGUUUUCCUCCUCC
 CUUUUGCCACGGCGGAACUCAUCGCCGCCUGCCUUGCCCGCUGCUGGACAGGGGCUCCGCGUUGGGCA
 CUGACAAUUCGUGGUGUUGUGCGGGAAUACUUGUCCUUUCCUUGGCUUGCUGCCUGUGUUGCCACCU
 GGAUUCUGCGCGGACGUCUUCUGCUACGUCCUUCGCGCCUCAAUCCAGCGGACCUUCCUUCGCCG
 GCCUGCUGCCGCGCUGCGGCCUUCUCCGCGUUCUGCCUUCGCCUUCAGACGAGUCGGAUUCUCCUUU
 GGGCCGCCUCCCGCCUGGAAUUCGAGCUCGUAAAAAAAAAAAAAAAAAAAAAAAAAAAAAAAAAAAAA
 AAAAAAAAAAAAAAAAAAAAAAAAAAAAAA

DNA Polynucleotide

[0606] In one aspect, the present invention provides a DNA polynucleotide encoding a RNA polynucleotide according to the present invention. Preferably, the RNA polynucleotide encodes an engraftment enhancer.

[0607] As used herein, a “DNA polynucleotide” may refer to a polynucleotide which consists substantially of deoxy-ribonucleotides, which are nucleotides containing deoxyribose as its pentose component.

[0608] Exemplary DNA polynucleotides are provided below in SEQ ID NOs: 48-55. In some embodiments, the DNA polynucleotide comprises or consists of a nucleotide

sequence having least 70%, at least 75%, at least 80%, at least 85%, at least 90%, at least 95%, at least 96%, at least 97%, at least 98%, at least 99% or 100% identity to any of SEQ ID NOs: 48-55. In some embodiments, the DNA polynucleotide comprises or consists of the nucleotide sequence of any of SEQ ID NOs: 48-55.

[0609] In one aspect, the present invention provides a DNA polynucleotide comprising or consisting a nucleotide

sequence having least 70%, at least 75%, at least 80%, at least 85%, at least 90%, at least 95%, at least 96%, at least 97%, at least 98%, at least 99% or 100% identity to any of SEQ ID NOs: 48-55.

[0610] In one aspect, the present invention provides a DNA polynucleotide comprising or consisting of the nucleotide sequence of any of SEQ ID NOs: 48-55.

Exemplary DNA polynucleotide encoding an RNA polynucleotide encoding CXCR4 WT (SEQ ID NO: 48)

TAATACGACTCACTATAAGGACTCACTATTTGTTTTTCGCGCCAGTTGCAAAAAGTGTGCCACCATGG

AAGGCATCAGCATCTACACGAGCAACTACACCGAGGAAATGGGCAGCGGACTACGACAGCATGA

AGGAACCCCTGCTTCGGGAAGAGAACGCCAACTTCAACAAGATCTTCTGCCACAATCTACAGCATCA

TCTTTCTGACCGGCATCGTGGGCAACGGACTCGTGATCCTCGTGATGGGCTACCAGAAAAGCTGCGGA

GCATGACCGACAAGTACCGGCTGCACCTGAGCGTGGCCGACCTGCTGTTCGTGATCACCCTGCCTTTCT

GGGCCGTGGACGCGCTGGCCAATTGGTACTTCGGCAACTTCCGTGCAAGGCCGTGCACGTGATCTACA

CAGTGAACTGTACAGCAGCGTGCTGATCCTGGCCTTCATCAGCCTGGACAGATACCTGGCCATCGTGC

ACGCCACCAACAGCCAGCGGCTAGAAAGCTGCTGGCCGAGAAGTGGTGACGTGGGCGTGTGGATTTC

CCGCCCTGCTGCTGACCATCCCCGACTTCATCTTCGCCAACGTGTCCGAGGCCGACGACCGGTACATCT

GCGACCGGTTCTACCCCAACGACCTGTGGGTGGTGGTGTCCAGTTCAGCACATCATGGTGGGACTGA

TCCTGCCTGGCATCGTGATTCTGAGCTGCTACTGCATCATCATCAGCAAGCTGAGCCACAGCAAGGGCC

ACCAGAAGCGGAAGGCCCTGAAAACCAACCGTGATCCTGATTCTGGCTTTCTTCGCCTGTGGCTGCCCT

ACTACATCGGCATCAGCATCGACAGCTTCATCCTGCTGGAATCATCAAGCAGGGCTGCGAGTTCGAGA

ACACCGTGCAAGTGGATCAGCATTACCGAGGCCCTGGCCTTTTCCACTGTGCTGAAACCCATATCC

TGTACGCCTTCCTGGGCGCAAGTTCAAGACCTCTGCCAGCACGCCCTGACCAGCGTTCAGAGGAA

GCAGCCTGAAGATCCTGAGCAAGGGCAAGAGAGGCGGCCACAGCTCCGTGTCTACAGAGAGCGAGAGCA

GCAGCTTCCACAGCAGCTGAAATCAACCTCTGGATTACAAAATTTGTGAAAGATTGACTGGTATTCTTA

ACTATGTTGCTCCTTTTACGCTATGTGGATACGCTGCTTTAATGCCTTTGTATCATGCTATTGCTTCCC

GTATGGCTTTTCTCCTCCTTGATAAATCCTGGTTGCTGTCTTTATGAGGAGTTGTGGCCCG

TTGTCAGGCAACGTGGCGTGGTGTGCACTGTGTTGCTGACGCAACCCCACTGGTTGGGGCATTGCCA

CCACCTGTGACGCTCCTTTCCGGGACTTTCGCTTTCCCCCTCCCTATTGCCAGCGGGAACCTATCGCCG

CCTGCCTTGCCGCTGCTGGACAGGGGCTCGGCTGTTGGGCACTGACAATCCGTGGTGTGTGCGGGA

AATCATCGTCCTTTCTTGGCTGCTCGCTGTGTTGCCACCTGGATTCTGCGCGGACGTCCTTCTGCT

ACGTCCCTTCGGCCCTCAATCCAGCGGACCTTCCTTCCGCGGCTGCTGCCGCTCTGCGGCTCTTTC

CGCGTCTTCGCTTCGCCCTCAGACGAGTCGGATCTCCTTTGGGCCGCTCCCGCCTGTTAATTAAA

AA

AA

Exemplary DNA polynucleotide encoding an RNA polynucleotide encoding CXCR4 V160L (SEQ ID NO: 49)

TAATACGACTCACTATAAGGACTCACTATTTGTTTTTCGCGCCAGTTGCAAAAAGTGTGCCACCATGG

AAGGCATCAGCATCTACACGAGCAACTACACCGAGGAAATGGGCAGCGGACTACGACAGCATGA

AGGAACCCCTGCTTCGGGAAGAGAACGCCAACTTCAACAAGATCTTCTGCCACAATCTACAGCATCA

TCTTTCTGACCGGCATCGTGGGCAACGGACTCGTGATCCTCGTGATGGGCTACCAGAAAAGCTGCGGA

-continued

GCATGACCGACAAGTACCGGCTGCACCTGAGCGTGGCCGACCTGCTGTTCTGTGATCACCTGCGCTTTCT
GGGCCGTGGACGCCGTGGCCAATTGGTACTTCGGCAACTTCCTGTGCAAGGCCGTGCACGTGATCTACA
CAGTGAACCTGTACAGCAGCGTGCTGATCCTGGCCTTCATCAGCCTGGACAGATACCTGGCCATCGTGC
ACGCCACCAACAGCCAGCGGCCTAGAAAGCTGCTGGCCGAGAAGGTGGTGTACGTGGGCGTGTGGATTCT
CCGCCCTGCTGCTGACCATCCCCGACTTCATCTTCGCCAACGTGTCCGAGGCCGACGACCGGTACATCT
GCGACCGGTTCTACCCCAACGACCTGTGGGTGGTGGTGTTCAGTTCAGCACATCATGGTGGGACTGA
TCCTGCGCTGGCATCGTGATTCTGAGCTGCTACTGCATCATCATCAGCAAGCTGAGCCACAGCAAGGGCC
ACCAGAAGCGGAAGGCCCTGAAAACCACCGTGATCCTGATTCTGGCTTTCTTCGCCCTGCTGGCTGCCCT
ACTACATCGGCATCAGCATCGACAGCTTCATCCTGCTGGAAATCATCAAGCAGGGCTGCGAGTTCGAGA
ACACCGTGCACAAGTGGATCAGCATTACCGAGGCCCTGGCCTTTTCCACTGCTGCCTGAACCTATCC
TGTACGCCCTTCTGGGCGCCAAGTTCAAGACCTCTGCCCAGCACGCCCTGACCAGCGTGTCCAGAGGAA
GCAGCCTGAAGATCCTGAGCAAGGGCAAGAGAGCGGCCACAGCTCCGTGTCTACAGAGAGCGAGAGCA
GCAGCTTCCACAGCAGCTGAAATCAACCTCTGGATTACAAAATTTGTGAAAGATTGACTGGTATTCTTA
ACTATGTTGCTCCTTTTACGCTATGTGGATACGCTGCTTTAATGCCTTTGTATCATGCTATTGCTTCCC
GTATGGCTTTTCATTTCTCCTCCTTGATATAATCCTGGTTGCTGTCTTTATGAGGAGTTGTGGCCCG
TTGTGAGGCAACGTGGCGTGGTGTGCACTGTGTTTGCTGACGCAACCCCCACTGGTTGGGGCATTGCCA
CCACCTGTGAGCTCCTTTCCGGGACTTTCGCTTTCCCCCTCCCTATTGCCACGGCGGAACATCGCCG
CCTGCTTTGCCCGCTGCTGGACAGGGGCTCGGCTGTTGGGCACTGACAAATCCGTGGTGTGTCGGGGA
AATCATCGTCCTTTCTTGGTGTGCTCGCCTGTGTTGCCACCTGGATTCTGCGCGGACGTCTTCTGCT
ACGTCCCTTCGGCCCTCAATCCAGCGGACCTTCCTTCCCGCGCCTGCTGCCGGCTCTGCGGCTCTTC
CGCTCTTCGCTTCGCCCTCAGACGAGTCGGATCTCCTTTGGGCCGCTCCCCGCTGTTAATTAAA
AA
AA
Exemplary DNA polynucleotide encoding an RNA polynucleotide encoding
CXCR4 A175F (SEQ ID NO: 50)
TAATACGACTCACTATAAGGACTCACTATTGTTTTTCGCGCCAGTTGCAAAAAGTGTGCCACCATGG
AAGGCATCAGCATCTACACCAGCGACAACCTACACCGAGGAATGGGCAGCGCGACTACGACAGCATGA
AGGAACCTGCTTCCGGGAAGAGAACGCCAATTCAACAAGATCTTCTGCCACAATCTACAGCATCA
TCTTTCTGACCGGCATCGTGGGCAACGGAAGTCTGATCCTCGTGTGGCTACAGAAAAGCTGCGGA
GCATGACCGACAAGTACCGGCTGCACCTGAGCGTGGCCGACCTGCTGTTCTGTGATCACCTGCGCTTTCT
GGGCCGTGGACGCCGTGGCCAATTGGTACTTCGGCAACTTCCTGTGCAAGGCCGTGCACGTGATCTACA
CAGTGAACCTGTACAGCAGCGTGCTGATCCTGGCCTTCATCAGCCTGGACAGATACCTGGCCATCGTGC
ACGCCACCAACAGCCAGCGGCCTAGAAAGCTGCTGGCCGAGAAGGTGGTGTACGTGGGCGTGTGGATTCT
CCGCCCTGCTGCTGACCATCCCCGACTTCATCTTCTTCAACGTGTCCGAGGCCGACGACCGGTACATCT
GCGACCGGTTCTACCCCAACGACCTGTGGGTGGTGGTGTTCAGTTCAGCACATCATGGTGGGACTGA
TCCTGCGCTGGCATCGTGATTCTGAGCTGCTACTGCATCATCATCAGCAAGCTGAGCCACAGCAAGGGCC
ACCAGAAGCGGAAGGCCCTGAAAACCACCGTGATCCTGATTCTGGCTTTCTTCGCCCTGCTGGCTGCCCT
ACTACATCGGCATCAGCATCGACAGCTTCATCCTGCTGGAAATCATCAAGCAGGGCTGCGAGTTCGAGA
ACACCGTGCACAAGTGGATCAGCATTACCGAGGCCCTGGCCTTTTCCACTGCTGCCTGAACCTATCC

-continued

TGTACGCCCTTCTGGGCGCCAAGTTCAAGACCTCTGCCAGCACGCCCTGACCAGCGTGTCCAGAGGAA
GCAGCCTGAAGATCCTGAGCAAGGGCAAGAGAGGCGGCCACAGCTCCGTGTCTACAGAGAGCGAGAGCA
GCAGCTTCCACAGCAGCTGAAATCAACCTCTGGATTACAAAATTTGTGAAAGATTGACTGGTATTCTTA
ACTATGTTGCTCCTTTTACGCTATGTGGATACGCTGCTTTAATGCCTTTGTATCATGCTATTGCTTCCC
GTATGGCTTTTCATTTTCTCCTCCTTGATATAATCCTGGTTGCTGTCTCTTTATGAGGAGTTGTGGCCCG
TTGTCAAGCAACGTGGCGTGGTGTGCACTGTGTTTGCTGACGCAACCCCCACTGGTTGGGGCATTGCCA
CCACCTGTCAGCTCCTTTCCGGGACTTTTCGCTTTCCCCCTCCCTATTGCCACGGCGGAACTCATCGCCG
CCTGCCTTGCCCGCTGTGAGACAGGGGCTCGGCTGTGGGCACTGACAATTCGCTGGTGTGTGCGGGA
AATCATCGTCCTTTCTTGGTGTGCTCGCCTGTGTTGCCACCTGGATTCTGCGCGGGACGTCCTTCTGCT
ACGTCCCTTCGGCCCTCAATCCAGCGGACCTTCCTTCCCGCGCCTGTGCGCGCTCTGCGGCCTCTTC
CGCTCTTCGCTTCGCCCTCAGACGAGTCGGATCTCCCTTTGGGCCGCTCCCGCCTGTTAATTAAA
AA
AA
Exemplary DNA polynucleotide encoding an RNA polynucleotide encoding
CXCR4 Q200A (SEQ ID NO: 51)
TAATACGACTCACTATAAGGACTCACTATTTGTTTTCGCGCCAGTTGCAAAAAGTGTGCCACCATGG
AAGGCATCAGCATCTACACCAGCGACAACCTACACCGAGGAAATGGGCAGCGCGACTACGACAGCATGA
AGGAACCTGCTTCCGGGAAGAGAACGCCAACTTCAACAAGATCTTCTGCCCACAATCTACAGCATCA
TCTTTCTGACCGGCATCGTGGCAACGGAAGTCTGATCCTCGTATGGGCTACAGAAAAGCTGCGGA
GCATGACCGACAAGTACCGGCTGCACCTGAGCGTGGCCGACCTGCTGTTGCTGATCACCTGCTTTCT
GGGCCGTGGACGCGCGTGGCAATTGGTACTTCGGCAACTTCTGTGCAAGGCCGTGCACGTGATCTACA
CAGTGAACCTGTACAGCAGCGTGTGATCCTGGCCTTCATCAGCCTGGACAGATACCTGGCCATCGTGC
ACGCCACCAACAGCCAGCGGCCTAGAAAGCTGCTGGCCGAGAAGTGGTGTACGTGGGCGTGTGGATTCT
CCGCCCTGCTGCTGACCATCCCGACTTCATCTTCGCCAACGTGTCCGAGGCCGACGACCGGTACATCT
GCGACCGGTTCTACCCCAACGACCTGTGGGTGGTGGTGTTCGCGTTCAGCACATCATGGTGGGACTGA
TCCTGCTGGCATCGTATTCTGAGCTGCTACTGCATCATCATCAGCAAGCTGAGCCACAGCAAGGGCC
ACCAGAAGCGGAAGGCCCTGAAACACCGTGATCCTGATTCTGGCTTTCTTCGCTGCTGGCTGCCCT
ACTACATCGGCATCAGCATCGACAGCTTCATCCTGCTGGAAATCATCAAGCAGGGCTGCGAGTTGAGA
ACACCGTGCACAAGTGGATCAGCATTACCGAGGCCCTGGCCTTTTTCACCTGCTGCCTGAACCCATATCC
TGTACGCCCTTCTGGGCGCCAAGTTCAAGACCTCTGCCAGCACGCCCTGACCAGCGTGTCCAGAGGAA
GCAGCCTGAAGATCCTGAGCAAGGGCAAGAGAGGCGGCCACAGCTCCGTGTCTACAGAGAGCGAGAGCA
GCAGCTTCCACAGCAGCTGAAATCAACCTCTGGATTACAAAATTTGTGAAAGATTGACTGGTATTCTTA
ACTATGTTGCTCCTTTTACGCTATGTGGATACGCTGCTTTAATGCCTTTGTATCATGCTATTGCTTCCC
GTATGGCTTTTCATTTTCTCCTCCTTGATATAATCCTGGTTGCTGTCTCTTTATGAGGAGTTGTGGCCCG
TTGTCAAGCAACGTGGCGTGGTGTGCACTGTGTTTGCTGACGCAACCCCCACTGGTTGGGGCATTGCCA
CCACCTGTCAGCTCCTTTCCGGGACTTTTCGCTTTCCCCCTCCCTATTGCCACGGCGGAACTCATCGCCG
CCTGCCTTGCCCGCTGTGAGACAGGGGCTCGGCTGTGGGCACTGACAATTCGCTGGTGTGTGCGGGA
AATCATCGTCCTTTCTTGGTGTGCTCGCCTGTGTTGCCACCTGGATTCTGCGCGGGACGTCCTTCTGCT
ACGTCCCTTCGGCCCTCAATCCAGCGGACCTTCCTTCCCGCGCCTGTGCGCGCTCTGCGGCCTCTTC
CGCTCTTCGCTTCGCCCTCAGACGAGTCGGATCTCCCTTTGGGCCGCTCCCGCCTGTTAATTAAA

-continued

AA
 AA
 Exemplary DNA polynucleotide encoding an RNA polynucleotide encoding
 CXCR4 D262N (SEQ ID NO: 52)
 TAATACGACTCACTATAAGGACTCACTATTTGTTTTTCGCGCCAGTTGCAAAAAGTGTGCGCCACCATGG
 AAGGCATCAGCATCTACACCAGCGACAACCTACACCGAGGAAATGGGCAGCGCGACTACGACAGCATGA
 AGGAACCTGCTTCCGGGAAGAGAACGCCAATTCAACAAGATCTTCCTGCCACAATCTACAGCATCA
 TCTTTCTGACCGGCATCGTGGGCAACGGAAGTCTGATCCTCGTGATGGGCTACCAGAAAAGCTGCGGA
 GCATGACCGACAAGTACCGGCTGCACCTGAGCGTGGCCGACCTGCTGTTCTGTATCACCTGCCTTTCT
 GGGCCGTGGACGCGCTGGCCAATTGGTACTTCGGCAACTTCCTGTGCAAGGCCGTGCACGTGATCTACA
 CAGTGAACCTGTACAGCAGCGTGTGATCCTGGCCTTCATCAGCCTGGACAGATACCTGGCCATCGTGC
 ACGCCACCAACAGCCAGCGGCCTAGAAAGCTGCTGGCCGAGAAGGTGGTGTACGTGGGCGTGTGGATTCT
 CCGCCCTGCTGCTGACCATCCCGACTTCATCTTCGCCAACGTGTCCGAGGCCGACGACCGGTACATCT
 GCGACCGGTTCTACCCCAACGACCTGTGGGTGGTGGTGTTCAGTTCAGCACATCATGGTGGGACTGA
 TCCTGCCTGGCATCGTGATTCTGAGCTGCTACTGCATCATCATCAGCAAGCTGAGCCACAGCAAGGGCC
 ACCAGAAGCGGAAGGCCCTGAAAACACCGTGATCCTGATTCTGGCTTTCTTCGCCTGCTGGCTGCCCT
 ACTACATCGGCATCAGCATCAACAGCTTCATCCTGCTGGAAATCATCAAGCAGGGCTGCGAGTTCGAGA
 ACACCGTGACAAAGTGATCAGCATTACCGAGGCCCTGGCCTTTTCCACTGCTGCCTGAACCTATCC
 TGTACGCCTTCTTGGGCGCCAAGTTCAAGACCTCTGCCCAGCACGCCCTGACCAGCGTGTCCAGAGGAA
 GCAGCCTGAAGATCCTGAGCAAGGGCAAGAGAGGCGGCCACAGCTCCGTGTCTACAGAGAGCGAGAGCA
 GCAGCTTCCACAGCAGCTGAAATCAACCTCTGGATTACAAAATTTGTGAAAGATTGACTGGTATTCTTA
 ACTATGTTGCTCCTTTTACGCTATGTGGATACGCTGCTTTAATGCCTTTGTATCATGCTATTGCTTCCC
 GTATGGCTTTTCATTTTCTCCTCCTTGTATAAATCCTGGTTGTGCTCTTTATGAGGAGTTGTGGCCCG
 TTGTGAGGCAACGTGGCGTGGTGTGCACTGTGTTTGCTGACGCAACCCCACTGGTTGGGGCATTGCCA
 CCACCTGTCAGCTCCTTTCGGGACTTTCGCTTTCCTCCCTCCTATTGCCACGGCGGAACATCGCCG
 CCTGCCTTGCCCGCTGCTGGACAGGGGCTCGGCTGTTGGGCACCTGACAAATTCGTGGTGTGTCGGGA
 AATCATCGTCCTTCTTGGTGTGCTCGCCTGTGTTGCCACCTGGATTCTGCGCGGGACGTCTTCTGCT
 ACGTCCCTTCGGCCCTCAATCCAGCGGACCTTCCTTCCCGCGCCTGCTGCCGGCTCTGCGGCTCTTC
 CGGCTCTTCGCCTTCGCCCTCAGACGAGTCGGATCTCCCTTTGGGCCGCTCCCGCCTGTTAATTAAA
 AA
 AA
 Exemplary DNA polynucleotide encoding an RNA polynucleotide encoding
 CXCR4 H281A (SEQ ID NO: 53)
 TAATACGACTCACTATAAGGACTCACTATTTGTTTTTCGCGCCAGTTGCAAAAAGTGTGCGCCACCATGG
 AAGGCATCAGCATCTACACCAGCGACAACCTACACCGAGGAAATGGGCAGCGCGACTACGACAGCATGA
 AGGAACCTGCTTCCGGGAAGAGAACGCCAATTCAACAAGATCTTCCTGCCACAATCTACAGCATCA
 TCTTTCTGACCGGCATCGTGGGCAACGGAAGTCTGATCCTCGTGATGGGCTACCAGAAAAGCTGCGGA
 GCATGACCGACAAGTACCGGCTGCACCTGAGCGTGGCCGACCTGCTGTTCTGTATCACCTGCCTTTCT
 GGGCCGTGGACGCGCTGGCCAATTGGTACTTCGGCAACTTCCTGTGCAAGGCCGTGCACGTGATCTACA
 CAGTGAACCTGTACAGCAGCGTGTGATCCTGGCCTTCATCAGCCTGGACAGATACCTGGCCATCGTGC

-continued

ACGCCACCAACAGCCAGCGGCCTAGAAAGCTGCTGGCCGAGAAGGTGGTGTACGTGGGCGTGTGGATTCC
CCGCCCTGTGCTGACCATCCCGACTTCATCTTCGCCAACGTGTCCGAGGCCGACGCCGTACATCT
GCGACCGGTTCTACCCCAACGACCTGTGGGTGGTGGTGTCCAGTTCAGCACATCATGGTGGGACTGA
TCCTGCCTGGCATCGTGATTCTGAGCTGCTACTGCATCATCATCAGCAAGCTGAGCCACAGCAAGGGCC
ACCAGAAGCGGAAGGCCCTGAAAACACCGTGATCCTGATTCTGGCTTTCTTCGCCTGCTGGCTGCCCT
ACTACATCGGCATCAGCATCGACAGCTTCATCCTGCTGGAAATCATCAAGCAGGGCTGCGAGTTCGAGA
ACACCGTGGCCAAGTGGATCAGCATTACCGAGGCCCTGGCCTTTTCCACTGCTGCCTGAACCCCTATCC
TGTACGCCTTCTTGGGCGCCAAGTTCAAGACCTCTGCCCAGCACGCCCTGACCAGCGTGTCCAGAGGAA
GCAGCCTGAAGATCCTGAGCAAGGGCAAGAGAGGCGGCCACAGCTCCGTGTCTACAGAGAGCGAGAGCA
GCAGCTTCCACAGCAGCTGAAATCAACCTCTGGATTACAAAATTTGTGAAAGATTGACTGGTATTCTTA
ACTATGTTGCTCCTTTTACGCTATGTGGATACGCTGCTTTAATGCCTTTGTATCATGCTATTGCTTCCC
GTATGGCTTTTCATTTCTCCTCCTTGTATAAATCCTGGTTGCTGTCTCTTTATGAGGAGTTGTGGCCCG
TTGTGAGGCAACGTGGCGTGGTGTGCACTGTGTTTGTGACGCAACCCCCACTGGTTGGGGCATTGCCA
CCACCTGTGAGCTCCTTTCCGGGACTTTCGCTTTCCCCCTCCCTATTGCCACGGCGGAACATCGCCG
CCTGCCTTGGCCGCTGTGAGCAGGGGCTCGGCTGTTGGGCACTGACAATTCGGTGGTGTGTCGGGGA
AATCATCGTCCTTTCTTGGTGTGCTCGCCTGTGTTGCCACCTGGATTCTGCGCGGACGTCTTCTGCT
ACGTCCCTTCGGCCCTCAATCCAGCGGACCTTCCTTCCCGCGCCTGTGCGCGCTCTGCGGCTCTTC
CGCTCTTCGCTTCGCCCTCAGACGAGTCGGATCTCCCTTTGGGCCGCTCCCCGCTGTTAATTAAA
AA
AA
Exemplary DNA polynucleotide encoding an RNA polynucleotide encoding
ITGA4 (SEQ ID NO: 54)
TAATACGACTCACTATAAGGACTCACTATTTGTTTTTCGCGCCAGTTGCAAAAGTGTGCGCCACCATGG
CTTGGGAGGCTCGGAGAGAACCTGGACCTAGAAGAGCTGCCGTGCGGAGACTGTCATGCTGCTGCTGT
GCCTGGGGGTGCCCCACAGGCAGACCTTACAACGTGGATACCGAGAGCGCCCTGCTGTATCAGGGCCCCC
ACAACACCTGTTTGGCTACTCTGTGGTGTGTCACAGCCACGGCGCCAACCGCTGGCTGCTGGTGGCG
CCCCCACCGCCAATTGGCTGGCCAATGCCTCCGTGATCAACCCAGGCGCCATCTACAGATGTCGGATCG
GCAAGAATCCTGGCCAGACATGCGAGCAGCTGCAGCTGGGCTCCCCAACGGCGAGCCTTGTGGCAAGA
CATGCCTGGAGGAGAGGACAATCAGTGGCTGGGCGTGACACTGAGCAGACAGCCCGGCGAGAACGGCT
CCATCGTGACATGCGGCCACAGATGGAAGAACATCTTTACATCAAGAACGAGAATAAGCTGCCAACAG
GCGGCTGCTATGGCGTGCCCCAGACCTGAGAACAGAGCTGAGCAAGCGGATCGCCCCATGCTACCAGG
ATTATGTGAAGAAGTTTGGCGAGAATTTGCTCTTGCCAGGCGGCATCTCCTCTTCTACACCAAGG
ATCTGATCGTGATGGGCGCCCTGGCTCTTCTATTGGACAGGCTCTCTGTTCTGTGATAATATCACAA
CCAACAAGTACAAGGCTTCTTGACAAGCAGAACAGGTGAAGTTCGGCTCCTATCTGGGCTACAGCG
TGGGCGCCGCCACTTTCGGTCTCAGCACACCACAGAGTGGTGGGCGGCGCCCCCAGCACGAGCAGA
TCGGCAAGGCTACATCTTCTCCATCGACGAGAAGGAGCTGAATATCCTGCACGAGATGAAGGGCAAGA
AGCTGGGCTCCTACTTTGGCGCTCCGTGTGCGCCGTGGACCTGAATGCCGACGGCTTTTCCGACCTGC
TGGTGGGCGCCCCAATGCAGTCCACAATCAGAGAGGAGGCGAGAGTGTTCGTGTATATCAATTCGGCA
GCGGCGCCGTGATGAATGCCATGGAGACCAATCTGGTGGGCTCCGACAAGTATGCCGCCAGATTCGGCG

-continued

AGAGCATCGTGAATCTGGGCGACATCGACAACGATGGCTTCGAGGACGTGGCCATCGGCGCCCCACAGG
AGGATGACCTGCAGGGGCCATCTATATCTATAACGGCCGGGCCGACGGCATCTCTAGCACCTTCTCCC
AGAGAATCGAGGGCTGCAGATCAGCAAGTCCCTGAGCATGTTTCGGCCAGAGCATCTCCGGCCAGATCG
ACGCCGATAATAACGGCTACGTGGATGTGGCCGTGGGCGCCTTTAGAAGCGACTCCGCCGTGCTGCTGA
GAACAAGGCCCGTGGTGATCGTGGATGCCTCCCTGTCTCACCCGAGTCCGTGAATCGGACAAAGTTTG
ACTGCGTGGAGAATGGCTGGCCAAGCGTGTGCATCGATCTGACACTGTGCTTTTCTATAAGGGCAAGG
AGGTGCCAGGCTATATCGTGTGTTTTTACAACATGTCTCTGGATGTGAACAGAAAGGCCGAGTCCCCC
CAAGATTCTACTTTTCTCTAACGGCACCTCTGATGTGATCACCGGCTCTATCCAGGTGTCCAGCAGGG
AGGCCAATTGCAGAACCACCAGGCCTTTATGCGGAAGGATGTGCGCGACATCCTGACCCCAATCCAGA
TCGAGGCCGCTATCACCTGGGCCCCACGTGATCTCAAGCGGTCCACCGAGGAGTTCCTCCACTGC
AGCCAATCTGCAGCAGAAGAAGGAGAAGGACATCATGAAGAAGACAATCAACTTCGCCAGGTTTTCGCG
CCCACGAGAACTGTTCCGCCGACCTGCAGGTGTCTGCCAAGATCGGCTTCCTGAAGCCCCACGAGAACA
AGACATATCTGGCCGTGGGCTCCATGAAGACCCTGATGCTGAACGTGAGCCTGTTTAACGCCGGCGACG
ATGCCTACGAGACAACACTGCACGTGAAGCTGCCAGTGGGCCGTACTTCATCAAGATCCTGGAGCTGG
AGGAGAAGCAGATCAACTGTGAGGTGACCGATAACTCCGGCGTGGTGCAGCTGGATTGCAGCATCGGCT
ATATCTACGTGGACCACCTGTCCCGCATCGACATCTCTTTTCTGCTGGACGTGTCCAGCCTGTCCCGGG
CCGAGGAGGACCTGTCCATCACAGTGCACGCCACCTGCGAGAATGAGGAGGAGATGGACAACCTGAAGC
ACTCCAGAGTGACAGTGGCCATCCCACTGAAGTACGAGGTGAAGCTGACAGTGCACGGCTTTGTGAATC
CAACCTCCTTCGTGTACGGCTCCAATGACGAGAATGAGCCAGAGACATGTATGGTGGAGAAGATGAACC
TGACATTTACGTGATCAATACAGGCAATTCTATGGCCCCTAACGTGAGCGTGGAGATCATGGTGCCAA
ATTCTTTCAGCCCACAGACAGACAAGCTGTTTAACATCCTGGACGTGCAGACAACCACAGCGAGTGTC
ACTTTGAGAACTACCAGAGAGTGTGCGCCCTGGAGCAGCAGAAGTCCGCCATGCAGACACTGAAGGGCA
TCGTGAGATTTCGTAGCAAGACAGATAAGAGGCTGTGTACTGCATCAAGGCCGATCCCCACTGCCTGA
ATTTCTGTGCAACTTCGCAAGATGGAGTCTGGCAAGGAGGCCTCCGTGCACATCCAGCTGGAGGGCA
GACCCTCCATCCTGGAGATGGACGAGACCAGCGCCCTGAAGTTCGAGATCAGAGCCACAGGCTTCCAG
AGCCCAACCCCGGGTGATCGAGCTGAACAAGGATGAGAACGTGGCCACGTGCTGCTGGAGGGCCTGC
ACCACCAGCGGCCAAGAGATATTTACCATCGTGATCATCTCCAGCTCTCTGCTGCTGGGCCTGATCG
TGCTGCTGTGATCTCCTATGTGATGTGGAAGGCCGGCTTCTTTAAGCGGCAGTACAAGTCCATCCTGC
AGGAAGAAAATCGACGCGATTCTGGTCTTACATTAATTCTAAATCAAACGACGACTAAAATCAACCTC
TGGATTACAAAATTTGTGAAAGATTGACTGGTATTCTTAACTATGTTGCTCCTTTTACGCTATGTGGAT
ACGCTGCTTTAATGCCTTTGTATCATGCTATTGCTTCCCGTATGGCTTTTCAATTTCTCCTCCTGTATA
AATCCTGGTTGCTGTCTCTTTATGAGGAGTTGTGGCCGTTGTGAGCAACGTGGCGTGGTGTGCACTG
TGTTTGCTGACGCAACCCCACTGGTTGGGGCATTGCCACCACCTGTGAGCTCCTTTCCGGGACTTTTCG
CTTTCCCCCTCCCTATTGCCACGGCGGAACTCATCGCCGCTGCCTTGCCCGCTGCTGGACAGGGGCTC
GGCTGTTGGGCACTGACAATCCGTGGTGTGTCGGGGAATCATCGTCCTTTCTTGGCTGCTCGCCT
GTGTTGCCACCTGGATTCTGCGCGGACGTCTTCTGCTACGTCCCTTCGGCCCTCAATCCAGCGGACC
TTCTTCCCGCGGCTGTGCGGGCTCTGCGGCCTTCCGCGCTTCGCTTCGCCCTCAGACGAGTC

-continued

GGATCTCCCTTTGGGCCGCTCCCGCCTGTTAATTAAAAAAAAAAAAAAAAAAAAAAAAAAAAA
AA
AAAAAAAAAAAAAAAAAAAAAAAAAAAAAAAAAAAA

Exemplary DNA polynucleotide encoding an RNA polynucleotide encoding
KIT (SEQ ID NO: 55)

TAATACGACTCACTATAAGGACTCACTATTTGTTTTCGCGCCAGTTGCAAAAGTGTGCGCCACCATGA
GAGGCGCTCGCGGCGCTGGGATTTTCTCTGCGTTCTGCTCCTACTGCTTCGCGTCCAGACAGGCTCTT
CTCAACCATCTGTGAGTCCAGGGGAACCGTCTCCACCATCCATCCAGGAAATCAGACTTAATAG
TCCGCGTGGGCGCAGGATTAGGCTGTTATGCACTGATCCGGGCTTTGTCAAATGGACTTTTGAGATCC
TGGATGAAACGAATGAGAATAAGCAGAATGAATGGATCACGAAAAGGCAGAAGCCACCAACACCGGCA
AATACACGTGCACCAACAACACGGCTTAAGCAATTCATTTATGTGTTTGTAGAGATCCTGCCAAGC
TTTTCTTGTGTGACCGCTCCTTGTATGGGAAAGAAGACAACGACACGCTGGTCCGCTGTCTCTCACAG
ACCCAGAAGTGACCAATTATTCCTCAAGGGGTGCCAGGGGAAGCCTCTTCCCAAGGACTTGAGTTTA
TTCTTGACCCCAAGCGGGCATCATGATCAAAGTGTGAAACGCGCTACCATCGGCTCTGTCTGCATT
GTTCTGTGGACGAGGAGGCAAGTCAGTGTGTCGGAATAATTCATCTGAAAGTGAGGCCAGCCTTCA
AAGCTGTGCCTGTTGTGCTGTGTCCAAAGCAAGCTATCTTCTAGGGAAGGGGAAGAATTCACAGTGA
CGTGACAATAAAGATGTGTCTAGTTCTGTGTACTCAACGTGAAAAGAGAAAACAGTCAGACTAAAC
TACAGGAGAAATATAATAGCTGGCATCACGGTGACTTCAATTATGAACGTCAGGCAACGTTGACTATCA
GTTTCAGCGAGAGTTAATGATTCTGGAGTGTTCATGTGTTATGCCAATAATACTTTTGGATCAGCAAATG
TCACAACAACCTTGGAAGTAGTAGATAAAGGATTCAATTAATATCTTCCCATGATAAACACTACAGTAT
TTGTAAACGATGGAGAAATGTAGATTTGATTGTTGAATATGAAGCATTCCCCAAACCTGAACACCAGC
AGTGGATCTATATGAACAGAACCTTCACTGATAAATGGGAAGATTATCCCAAGTCTGAGAATGAAAGTA
ATATCAGATACGTAAGTGAACCTTCACTTAACGAGATTAAAGGCACCGAAGGAGGCACTTACACATTCC
TAGTGTCCAATTCTGACGTCAATGTGCCATAGCATTTAATGTTTATGTGAATACAAAACAGAAATCC
TGACTTACGACAGGCTCGTAATGGCATGCTCCAATGTGTGGCAGCAGGATTCCCAGAGCCACAATAG
ATTGGTATTTTTGTCCAGGAAGTGAAGAGATGCTCTGCTTCTGTACTGCCAGTGGATGTGAGACAC
TAAACTCATCTGGGCCACCGTTTGGAAGCTAGTGGTTCAGAGTCTATAGATTCTAGTGCAATCAAGC
ACAATGGCACGGTTGAATGTAAGGCTTACAACGATGTGGGCAAGACTTCTGCCTATTTTAACCTTGCAT
TTAAAGGTAACAACAAGAGCAATCCATCCCAACCCCTGTTCACTCCTTTGCTGATTGGTTTCGTAA
TCGTAGCTGGCATGATGTGCATTATTGTGATGATTCTGACCTACAAATATTACAGAAACCCATGTATG
AAGTACAGTGGAAGGTTGTTGAGGAGATAAATGGAAACAATTATGTTTACATAGACCCAACACAACCTTC
CTTATGATCACAAATGGGAGTTTCCAGAAACAGGCTGAGTTTGGGAAAACCTGGGTGCTGGAGCTT
TCGGGAAGGTTGTTGAGGCACTGCTTATGGCTTAATTAAGTCAGATGCGGCCATGACTGTGCTGTAA
AGATGCTCAAGCCGAGTGCCCATTTGACAGAACGGGAAGCCCTCATGTCTGAACTCAAAGTCTGAGTT
ACCTTGTAATCACATGAATATTGTGAATCTACTTGGAGCCTGCACCATTGGAGGGCCACCCCTGGTCA
TTACAGAATATTGTTGCTATGTGATCTTTTGAATTTTTTGAGAAGAAAACGTGATTCAATTTATTGTT
CAAAGCAGGAAGATCATGCAGAAGTGCACCTTTATAAGAATCTTCTGCATTCAAAGGAGTCTTCTGCA
GCGATAGTACTAATGAGTACATGGACATGAAACCTGGAGTTCTTATGTTGTCCCAACCAAGGCCGACA
AAAGGAGATCTGTGAGAATAGGCTCATACATAGAAAGAGATGTGACTCCCGCCATCATGGAGGATGACG

-continued

AGTTGGCCCTAGACTTAGAAGACTTGCTGAGCTTTTCTTACCAGGTGGCAAAGGCATGGCTTTCCTCG
CCTCCAAGAAATTGTATTACAGAGACTTGGCAGCCAGAAATATCCTCCTTACTCATGGTCGGATCACAA
AGATTGTGATTTTGGTCTAGCCAGAGACATCAAGAATGATTCTAATTATGTGGTTAAAGGAAACGCTC
GACTACCTGTGAAGTGGATGGCACCTGAAAGCATTTTCAACTGTGTATACACGTTTGAAAGTGACGTCT
GGTCTATGGGATTTTCTTTGGGAGCTGTCTCTTTAGGAAGCAGCCCTATCCTGGAATGCCGGTCG
ATTCTAAGTTCTACAAGATGATCAAGGAAGGCTTCCGGATGCTCAGCCCTGAACACGCACCTGCTGAAA
TGTATGACATAATGAAGACTTGCTGGGATGCAGATCCCTAAAAAGACCAACATTCAAGCAAATTGTTT
AGCTAATTGAGAAGCAGATTTAGAGAGACCAATCATATTTACTCCAACCTAGCAAACGCAGCCCCA
ACCGACAGAAGCCCGTGGTAGACCATTCTGTGCGGATCAATTCTGTGCGCAGCACCGCTTCTCTCTCCC
AGCCTCTGCTTGTGACGACGATGTCTGAGCGGCCGCGTCGATCGACAATCAACCTCTGGATTACAAAA
TTTGTGAAAGATTGACTGGTATTCTTAAGTATGTTGCTCCTTTTACGCTATGTGGATACGCTGCTTTAA
TGCTTTGTATCATGCTATTGCTTCCCGTATGGCTTTCATTTTCTCCTCTGTATAAATCCTGGTTGC
TGTCTCTTTATGAGGAGTTGTGGCCCGTTGTCAGGCAACGTGGCGTGGTGTGCACTGTGTTTGTGACG
CAACCCCACTGGTTGGGGCATTGCCACCACCTGTCAGCTCCTTTCCGGGACTTTCGCTTTCCTCCCTCC
CTATTGCCACGGCGGAACATCATCGCCGCTGCCTTGCCCGCTGCTGGACAGGGGCTCGGCTGTTGGGCA
CTGACAATTCCGTGGTGTGTCGGGGAAATCATCGTCCTTTCCCTGGCTGCTCGCTGTGTTGCCACCT
GGATTCTGCGCGGACGCTCCTTCTGCTACGTCCTTTCGGCCCTCAATCCAGCGGACCTTCCTTCCCGCG
GCCTGCTGCGCGCTCTGCGGCCTCTTCCGCTCTTCGCTTTCGCTCAGACGAGTCGGATCTCCTTTT
GGGCCGCTCCCCGCTGGAATTCGAGCTCGTAAAAAAAAAAAAAAAAAAAAAAAAAAAAAAAAAAAA
AAAAAAAAAAAAAAAAAAAAAAAAAAAAA

Vector

[0611] In one aspect, the present invention provides a vector encoding a RNA polynucleotide according to the present invention.

[0612] In one aspect, the present invention provides a vector comprising the DNA polynucleotide according to the present invention.

[0613] A vector is a tool that allows or facilitates the transfer of an entity from one environment to another. In accordance with the present invention, and by way of example, some vectors used in recombinant nucleic acid techniques allow entities, such as a segment of nucleic acid (e.g. a heterologous DNA segment, such as a heterologous cDNA segment), to be transferred into a target cell. The vector may serve the purpose of maintaining the heterologous nucleic acid (DNA or RNA) within the cell, facilitating the replication of the vector comprising a segment of nucleic acid, or facilitating the expression of the protein encoded by a segment of nucleic acid.

[0614] Vectors may be non-viral or viral. Examples of vectors used in recombinant nucleic acid techniques include, but are not limited to, plasmids, chromosomes, artificial chromosomes and viruses. The vector may be single stranded or double stranded. It may be linear and optionally the vector comprises one or more homology arms. The vector may also be, for example, a naked nucleic acid (e.g. DNA). In its simplest form, the vector may itself be a nucleotide of interest.

[0615] The term “vector” includes an expression vector, i.e. a construct capable of in vivo or in vitro/ex vivo

expression. Expression may be controlled by a vector sequence, or, for example in the case of insertion at a target site, expression may be controlled by a target sequence. A vector may be integrated or tethered to the cell's DNA.

[0616] The vectors used in the invention may be, for example, plasmid or virus vectors and may include a promoter for the expression of a polynucleotide and optionally a regulator of the promoter.

[0617] In one embodiment, the vector is a plasmid.

[0618] In one embodiment, the vector is a viral vector. Viral delivery systems include but are not limited to adeno-viral vectors, adeno-associated viral (AAV) vectors, herpes viral vectors, retroviral vectors, lentiviral vectors and baculoviral vectors. In one embodiment, the vector is a retroviral, adenoviral or adeno-associated viral vector. In one embodiment, the vector is a retroviral vector. In one embodiment, the vector is a lentiviral vector.

[0619] In one embodiment, the vector is a Sendai viral vector. Sendai viral vectors may be particularly effective for transient expression of transgenes, such as engraftment enhancers. Furthermore, Sendai viral vectors are typically capable of very efficiently transferring transgenes to HSPCs (e.g. capable of transferring a transgene (e.g. GFP) to cord blood CD34+ cells at an MOI of 3). Sendai viral vectors are typically unable to infect neighbouring cells. In addition, Sendai viral vectors may be temperature sensitive, for example: at a temperature of about 34° C. they may be capable of replication; at a temperature of about 37° C. their replication may be low; and at a temperature of about 38° C.

they replication may be prevented. Sendai viral vectors typically do not impact cell viability.

Cell

[0620] In one aspect, the present invention provides a cell comprising the RNA polynucleotide, the DNA polynucleotide, or the vector of the present invention. Suitably, the cell is an isolated cell. Suitably, the cell is a mammalian cell, for example a human cell.

[0621] In one aspect, the present invention provides a method for providing a cell or a population of cells comprising the RNA polynucleotide of the present invention.

[0622] The cell is not particularly limited and any suitable cell may be used. For example, the cell may be any cell suitable for production of the RNA polynucleotide, DNA polynucleotide, or vector. In some embodiments, the cell is a hematopoietic stem cell (HSC) or a hematopoietic progenitor cell (HPC).

[0623] The RNA polynucleotide, DNA polynucleotide, or vector of the present invention may be introduced into cells using a variety of techniques known in the art, such as transformation, transfection and transduction. Several techniques are known in the art, for example transduction with recombinant viral vectors, such as retroviral, lentiviral, adenoviral, adeno-associated viral, baculoviral and herpes simplex viral vectors, Sleeping Beauty vectors; direct injection of nucleic acids and biolistic transformation.

[0624] Non-viral delivery systems include but are not limited to transfection methods. Here, transfection includes a process using a non-viral vector to deliver a gene to a target cell. Typical transfection methods include electroporation, DNA biolistics, lipid-mediated transfection, compacted DNA-mediated transfection, liposomes, immunoliposomes, lipofectin, cationic agent-mediated transfection, cationic facial amphiphiles (CFAs), and combinations thereof.

Population of Cells

[0625] In one aspect, the present invention provides a population or cells comprising the cell of the present invention.

[0626] Suitably, the population of cells are mammalian cells, for example human cells. The population of cells may be autologous or allogeneic. Suitably, the population of cells are obtained or obtainable from (mobilized) peripheral blood or cord blood.

[0627] Suitably, at least 1%, at least 2%, at least 5%, at least 10%, or at least 20% of the cells in the population of cells are cells of the present invention. Suitably, at least 50%, at least 60%, at least 70%, at least 80%, at least 90%, at least 95%, at least 99%, or 100% of the population of cells are HSPCs. Suitably, the population of cells comprises at least 10×10^5 , at least 50×10^5 , or at least 100×10^5 cells of the present invention.

Haematopoietic Stem and Progenitor Cells (HSPCs)

[0628] In one aspect, the present invention provides an HSPC comprising the RNA polynucleotide of the present invention. Suitably, the HSPC may be an isolated HSPC.

[0629] In one aspect, the present invention provides a population of HSPCs comprising the RNA polynucleotide of the present invention. Suitably, the population may be an isolated population.

[0630] In one aspect, the present invention provides a method for providing an HSPC or a population of HSPCs comprising the RNA polynucleotide of the present invention. The RNA polynucleotide may be delivered to an HSPC or a population of HSPCs by transfection.

[0631] In some embodiments, the RNA polynucleotide is delivered to the HSPC or the population of HSPCs by electroporation. Electroporation increases cell membrane permeability to nucleic acids using an electrical field and can be used to deliver mRNA to HSPCs (see e.g. Smits, E., et al., 2004. *Leukemia*, 18(11), pp. 1898-1902).

[0632] In some embodiments, the RNA polynucleotide is delivered to the HSPC or the population of HSPCs by an mRNA delivery system. A variety of materials have been developed for mRNA delivery, including lipids, lipid-like materials, polymers and protein derivatives (see e.g. Hou, X., et al., 2021. *Lipid nanoparticles for mRNA delivery*. *Nature Reviews Materials*, 6(12), pp. 1078-1094).

[0633] In some embodiments, the RNA polynucleotide is delivered to the HSPC or the population of HSPCs by lipid-mediated transfection. Lipid-mediated transfection, also known as “lipofection”, “lipid transfection” or “liposome-based transfection,” uses a lipid complex to deliver polynucleotides to cells. Lipids are amphiphilic molecules that contain three domains: a polar head group, a hydrophobic tail region and a linker between the two domains. Cationic lipids, ionizable lipids and other types of lipid have been explored for mRNA delivery. Lipid nanoparticle-mRNA formulations manufactured by rapid mixing exhibit a stable nanostructure in which mRNA molecules can be encapsulated in the interior core through electrostatic interactions with the lipids (see e.g. Hou, X., et al., 2021. *Lipid nanoparticles for mRNA delivery*. *Nature Reviews Materials*, 6(12), pp. 1078-1094).

Pharmaceutical Composition

[0634] In one aspect, the present invention provides a pharmaceutical composition comprising the HSPC or population of HSPCs according to the present invention.

[0635] The HSPCs of the invention may be formulated for administration to subjects with a pharmaceutically acceptable carrier, diluent or excipient. Suitable carriers and diluents include isotonic saline solutions, for example phosphate-buffered saline, and potentially contain human serum albumin.

[0636] Handling of cell therapy products is preferably performed in compliance with FACT-JACIE International Standards for cellular therapy.

Kit

[0637] In another aspect, the present invention provides a kit comprising one or more RNA polynucleotides, DNA polynucleotides, vectors, cells, cell populations, and/or pharmaceutical compositions of the invention.

[0638] The RNA polynucleotides, DNA polynucleotides, vectors, cells, cell populations, and/or pharmaceutical compositions may be provided in suitable containers. The kit may also include instructions for use.

Kit of Vectors Encoding Engraftment Enhancers

[0639] In some embodiments, a kit of the invention comprises: (i) a vector encoding CXCR4 (or a fragment or variant thereof); (ii) a vector encoding CD47 (or a fragment

[0651] In some embodiments, the kit comprises: (i) a DNA polynucleotide encoding a RNA polynucleotide encoding CXCR4 (or a fragment or variant thereof); and (ii) a DNA polynucleotide encoding a RNA polynucleotide encoding CD47 (or a fragment or variant thereof). In some embodiments, the kit comprises: (i) a DNA polynucleotide encoding a RNA polynucleotide encoding CXCR4 (or a fragment or variant thereof); and (ii) a DNA polynucleotide encoding a RNA polynucleotide encoding ITGA4 (or a fragment or variant thereof). In some embodiments, the kit comprises: (i) a DNA polynucleotide encoding a RNA polynucleotide encoding CXCR4 (or a fragment or variant thereof); and (ii) a DNA polynucleotide encoding a RNA polynucleotide encoding KIT (or a fragment or variant thereof). In some embodiments, the kit comprises: (i) a DNA polynucleotide encoding a RNA polynucleotide encoding ITGA4 (or a fragment or variant thereof); and (ii) a DNA polynucleotide encoding a RNA polynucleotide encoding CD47 (or a fragment or variant thereof). In some embodiments, the kit comprises: (i) a DNA polynucleotide encoding a RNA polynucleotide encoding KIT (or a fragment or variant thereof); and (ii) a DNA polynucleotide encoding a RNA polynucleotide encoding CD47 (or a fragment or variant thereof). In some embodiments, the kit comprises: (i) a DNA polynucleotide encoding a RNA polynucleotide encoding ITGA4 (or a fragment or variant thereof); and (ii) a DNA polynucleotide encoding a RNA polynucleotide encoding KIT (or a fragment or variant thereof).

[0652] In some embodiments, the kit comprises: (i) a DNA polynucleotide encoding a RNA polynucleotide encoding CXCR4 (or a fragment or variant thereof); (ii) a DNA polynucleotide encoding a RNA polynucleotide encoding ITGA4 (or a fragment or variant thereof); and (iii) a DNA polynucleotide encoding a RNA polynucleotide encoding KIT (or a fragment or variant thereof). In some embodiments, the kit comprises: (i) a DNA polynucleotide encoding a RNA polynucleotide encoding CXCR4 (or a fragment or variant thereof); (ii) a DNA polynucleotide encoding a RNA polynucleotide encoding ITGA4 (or a fragment or variant thereof); and (iii) a DNA polynucleotide encoding a RNA polynucleotide encoding CD47 (or a fragment or variant thereof). In some embodiments, the kit comprises: (i) a DNA polynucleotide encoding a RNA polynucleotide encoding CXCR4 (or a fragment or variant thereof); (ii) a DNA polynucleotide encoding a RNA polynucleotide encoding ITGA4 (or a fragment or variant thereof); and (iii) a DNA polynucleotide encoding a RNA polynucleotide encoding CD47 (or a fragment or variant thereof).

[0653] In some embodiments, the kit comprises: (i) a DNA polynucleotide encoding a RNA polynucleotide encoding CXCR4 (or a fragment or variant thereof); (ii) a DNA polynucleotide encoding a RNA polynucleotide encoding CD47 (or a fragment or variant thereof); (iii) a DNA polynucleotide encoding a RNA polynucleotide encoding ITGA4 (or a fragment or variant thereof); and (iv) a DNA polynucleotide encoding a RNA polynucleotide encoding KIT (or a fragment or variant thereof).

Method of Treatment

[0654] In one aspect, the invention provides a population of haematopoietic stem and/or progenitor cells (HSPCs) for use in a method of therapy, for example gene therapy. The method may comprise an HSPC transplantation, as described herein.

[0655] In one aspect, the invention provides a population of haematopoietic stem and/or progenitor cells (HSPCs) for use in a method of treatment. The method may comprise an HSPC transplantation, as described herein.

[0656] In one aspect, the present invention provides one or more HSPC mobiliser for use in a method of therapy, for example gene therapy. The method may comprise an HSPC transplantation, as described herein.

[0657] In one aspect, the present invention provides an RNA polynucleotide according to the present invention, a DNA polynucleotide according to the present invention, a vector according to the present invention, a cell according to the present invention, a pharmaceutical composition according to the present invention, or a kit according to the present invention, for use in a method of therapy, for example gene therapy.

[0658] In one aspect, the present invention provides an HSPC according to the present invention, for use in a method of therapy, for example gene therapy.

[0659] In one aspect, the present invention provides a population of HSPCs according to the present invention, for use in a method of therapy, for example gene therapy.

[0660] In one aspect, the present invention provides a method of treating a subject in need thereof, comprising the steps:

[0661] (a) providing an HSPC according to the present invention or a population of HSPCs according to the present invention; and

[0662] (b) administering the HSPC or population of HSPCs to the subject.

[0663] It is to be appreciated that all references herein to treatment include curative, palliative and prophylactic treatment. The treatment of mammals, particularly humans, is preferred. Both human and veterinary treatments are within the scope of the invention.

[0664] HSPC gene therapy (HSPC-GT) has emerged as an effective treatment modality for a range of diseases (Ferrari, G., et al., 2021. *Nature Reviews Genetics*, 22(4), pp. 216-234). The invention (e.g. the HSPC gene therapy) may be, for example, useful in the treatment of a disease selected from the group consisting of mucopolysaccharidosis type I (MPS-1), chronic granulomatous disorder (CGD), Fanconi anaemia (FA), sickle cell disease, Pyruvate kinase deficiency (PKD), Leukocyte adhesion deficiency (LAD), metachromatic leukodystrophy (MLD), globoid cell leukodystrophy (GLD), GM₂ gangliosidosis, thalassemia, cancer, a genetic disease and a blood disease. The invention may also be, for example, useful in the treatment of mucopolysaccharidoses disorders and other lysosomal storage disorders.

[0665] In addition, or in the alternative, the invention may be useful in the treatment of the disorders listed in WO 1998/005635. For ease of reference, part of that list is now provided: cancer, inflammation or inflammatory disease, dermatological disorders, fever, cardiovascular effects, haemorrhage, coagulation and acute phase response, cachexia, anorexia, acute infection, HIV infection, shock states, graft-versus-host reactions, autoimmune disease, reperfusion injury, meningitis, migraine and aspirin-dependent anti-thrombosis; tumour growth, invasion and spread, angiogenesis, metastases, malignant, ascites and malignant pleural effusion; cerebral ischaemia, ischaemic heart disease, osteoarthritis, rheumatoid arthritis, osteoporosis, asthma, multiple sclerosis, neurodegeneration, Alzheimer's disease, atherosclerosis, stroke, vasculitis, Crohn's disease and ulcer-

ative colitis; periodontitis, gingivitis; psoriasis, atopic dermatitis, chronic ulcers, epidermolysis bullosa; corneal ulceration, retinopathy and surgical wound healing; rhinitis, allergic conjunctivitis, eczema, anaphylaxis; restenosis, congestive heart failure, endometriosis, atherosclerosis or endosclerosis.

[0666] In addition, or in the alternative, the invention may be useful in the treatment of the disorders listed in WO 1998/007859. For ease of reference, part of that list is now provided: cytokine and cell proliferation/differentiation activity; immunosuppressant or immunostimulant activity (e.g. for treating immune deficiency, including infection with human immune deficiency virus; regulation of lymphocyte growth; treating cancer and many autoimmune diseases, and to prevent transplant rejection or induce tumour immunity); regulation of haematopoiesis, e.g. treatment of myeloid or lymphoid diseases; promoting growth of bone, cartilage, tendon, ligament and nerve tissue, e.g. for healing wounds, treatment of burns, ulcers and periodontal disease and neurodegeneration; inhibition or activation of follicle-stimulating hormone (modulation of fertility); chemotactic/chemokinetic activity (e.g. for mobilising specific cell types to sites of injury or infection); haemostatic and thrombolytic activity (e.g. for treating haemophilia and stroke); anti-inflammatory activity (for treating e.g. septic shock or Crohn's disease); as antimicrobials; modulators of e.g. metabolism or behaviour; as analgesics; treating specific deficiency disorders; in treatment of e.g. psoriasis, in human or veterinary medicine.

[0667] In addition, or in the alternative, the invention may be useful in the treatment of the disorders listed in WO 1998/009985. For ease of reference, part of that list is now provided: macrophage inhibitory and/or T cell inhibitory activity and thus, anti-inflammatory activity; anti-immune activity, i.e. inhibitory effects against a cellular and/or humoral immune response, including a response not associated with inflammation; inhibit the ability of macrophages and T cells to adhere to extracellular matrix components and fibronectin, as well as up-regulated fas receptor expression in T cells; inhibit unwanted immune reaction and inflammation including arthritis, including rheumatoid arthritis, inflammation associated with hypersensitivity, allergic reactions, asthma, systemic lupus erythematosus, collagen diseases and other autoimmune diseases, inflammation associated with atherosclerosis, arteriosclerosis, atherosclerotic heart disease, reperfusion injury, cardiac arrest, myocardial infarction, vascular inflammatory disorders, respiratory distress syndrome or other cardiopulmonary diseases, inflammation associated with peptic ulcer, ulcerative colitis and other diseases of the gastrointestinal tract, hepatic fibrosis, liver cirrhosis or other hepatic diseases, thyroiditis or other glandular diseases, glomerulonephritis or other renal and urologic diseases, otitis or other oto-rhino-laryngological diseases, dermatitis or other dermal diseases, periodontal diseases or other dental diseases, orchitis or epididymo-orchitis, infertility, orchidial trauma or other immune-related testicular diseases, placental dysfunction, placental insufficiency, habitual abortion, eclampsia, pre-eclampsia and other immune and/or inflammatory-related gynaecological diseases, posterior uveitis, intermediate uveitis, anterior uveitis, conjunctivitis, chorioretinitis, uveoretinitis, optic neuritis, intraocular inflammation, e.g. retinitis or cystoid macular oedema, sympathetic ophthalmia, scleritis, retinitis pigmentosa, immune and inflammatory components of

degenerative fundus disease, inflammatory components of ocular trauma, ocular inflammation caused by infection, proliferative vitreo-retinopathies, acute ischaemic optic neuropathy, excessive scarring, e.g. following glaucoma filtration operation, immune and/or inflammation reaction against ocular implants and other immune and inflammatory-related ophthalmic diseases, inflammation associated with autoimmune diseases or conditions or disorders where, both in the central nervous system (CNS) or in any other organ, immune and/or inflammation suppression would be beneficial, Parkinson's disease, complication and/or side effects from treatment of Parkinson's disease, AIDS-related dementia complex HIV-related encephalopathy, Devic's disease, Sydenham chorea, Alzheimer's disease and other degenerative diseases, conditions or disorders of the CNS, inflammatory components of stokes, post-polio syndrome, immune and inflammatory components of psychiatric disorders, myelitis, encephalitis, subacute sclerosing pan-encephalitis, encephalomyelitis, acute neuropathy, subacute neuropathy, chronic neuropathy, Guillain-Barre syndrome, Sydenham chora, myasthenia gravis, pseudo-tumour cerebri, Down's Syndrome, Huntington's disease, amyotrophic lateral sclerosis, inflammatory components of CNS compression or CNS trauma or infections of the CNS, inflammatory components of muscular atrophies and dystrophies, and immune and inflammatory related diseases, conditions or disorders of the central and peripheral nervous systems, post-traumatic inflammation, septic shock, infectious diseases, inflammatory complications or side effects of surgery, bone marrow transplantation or other transplantation complications and/or side effects, inflammatory and/or immune complications and side effects of gene therapy, e.g. due to infection with a viral carrier, or inflammation associated with AIDS, to suppress or inhibit a humoral and/or cellular immune response, to treat or ameliorate monocyte or leukocyte proliferative diseases, e.g. leukaemia, by reducing the amount of monocytes or lymphocytes, for the prevention and/or treatment of graft rejection in cases of transplantation of natural or artificial cells, tissue and organs such as cornea, bone marrow, organs, lenses, pacemakers, natural or artificial skin tissue.

[0668] Haematopoietic progenitor cells provide short term engraftment. Accordingly, gene therapy by administering haematopoietic progenitor cells (HPCs) may provide a non-permanent effect in the subject. For example, the effect may be limited to about one to six months following administration of the HPCs. An advantage of this approach would be better safety and tolerability, due to the self-limited nature of the therapeutic intervention. Such HPC gene therapy may be suited to treatment of acquired disorders, for example cancer, where time-limited expression of a (potentially toxic) anti-cancer nucleotide of interest may be sufficient to eradicate the disease.

[0669] In one aspect, the present invention provides a population of HSPCs, for use in a method of treating or preventing cancer, an immune disorder, a lysosomal storage disorder, a bacterial or viral infection, a genetic disease, or a haemoglobinopathy. The method may comprise an HSPC transplantation, as described herein.

[0670] In one aspect, the present invention provides a method of treating or preventing cancer, an immune disorder, a lysosomal storage disorder, a bacterial or viral infection, a genetic disease, or a haemoglobinopathy in a subject

in need thereof. The method may comprise an HSPC transplantation, as described herein.

[0671] In one aspect, the present invention provides one or more HSPC mobiliser for use in a method of treating or preventing cancer, an immune disorder, a lysosomal storage disorder, a bacterial or viral infection, a genetic disease, or a haemoglobinopathy. The method may comprise an HSPC transplantation, as described herein.

[0672] In one aspect, the present invention provides an RNA polynucleotide according to the present invention, a DNA polynucleotide according to the present invention, a vector according to the present invention, a cell according to the present invention, a pharmaceutical composition according to the present invention, or a kit according to the present invention, for use in the treatment or prevention of cancer, an immune disorder, a lysosomal storage disorder, a bacterial or viral infection, a genetic disease, or a haemoglobinopathy.

[0673] In one aspect, the present invention provides an HSPC according to the present invention, for use in the treatment or prevention of cancer, an immune disorder, a lysosomal storage disorder, a bacterial or viral infection, a genetic disease, or a haemoglobinopathy.

[0674] In one aspect, the present invention provides a population of HSPCs according to the present invention, for use in the treatment or prevention of cancer, an immune disorder, a lysosomal storage disorder, a bacterial or viral infection, a genetic disease, or a haemoglobinopathy.

[0675] In one aspect, the present invention provides a method of treating or preventing cancer, an immune disorder, a lysosomal storage disorder, a bacterial or viral infection, a genetic disease, or a haemoglobinopathy in a subject in need thereof, comprising the steps:

[0676] (a) providing an HSPC according to the present invention or a population of HSPCs according to the present invention; and

[0677] (b) administering the HSPC or population of HSPCs to the subject.

[0678] In one aspect, the present invention provides a population of HSPCs, for use in a method of treating or preventing cancer, a primary immunodeficiency, a lysosomal storage disorder, or a haemoglobinopathy. The method may comprise an HSPC transplantation, as described herein.

[0679] In one aspect, the present invention provides a method of treating or preventing cancer, a primary immunodeficiency, a lysosomal storage disorder, or a haemoglobinopathy in a subject in need thereof. The method may comprise an HSPC transplantation, as described herein.

[0680] In one aspect, the present invention provides one or more HSPC mobiliser for use in a method of treating or preventing cancer, a primary immunodeficiency, a lysosomal storage disorder, or a haemoglobinopathy. The method may comprise an HSPC transplantation, as described herein.

[0681] In one aspect, the present invention provides an RNA polynucleotide according to the present invention, a DNA polynucleotide according to the present invention, a vector according to the present invention, a cell according to the present invention, a pharmaceutical composition according to the present invention, or a kit according to the present invention, for use in the treatment or prevention of cancer, a primary immunodeficiency, a lysosomal storage disorder, or a haemoglobinopathy.

[0682] In one aspect, the present invention provides an HSPC according to the present invention, for use in the treatment or prevention of cancer, a primary immunodeficiency, a lysosomal storage disorder, or a haemoglobinopathy.

[0683] In one aspect, the present invention provides a population of HSPCs according to the present invention, for use in the treatment or prevention of cancer, a primary immunodeficiency, a lysosomal storage disorder, or a haemoglobinopathy.

[0684] In one aspect, the present invention provides a method of treating or preventing cancer, a primary immunodeficiency, a lysosomal storage disorder, or a haemoglobinopathy in a subject in need thereof, comprising the steps:

[0685] (a) providing an HSPC according to the present invention or a population of HSPCs according to the present invention; and

[0686] (b) administering the HSPC or population of HSPCs to the subject.

Cancer

[0687] In one aspect, the present invention provides a population of HSPCs, for use in a method of treating or preventing cancer. The method may comprise an HSPC transplantation, as described herein.

[0688] In one aspect, the present invention provides a method of treating or preventing cancer in a subject in need thereof. The method may comprise an HSPC transplantation, as described herein.

[0689] In one aspect, the present invention provides one or more HSPC mobiliser for use in a method of treating or preventing cancer. The method may comprise an HSPC transplantation, as described herein.

[0690] In one aspect, the present invention provides an RNA polynucleotide according to the present invention, a DNA polynucleotide according to the present invention, a vector according to the present invention, a cell according to the present invention, a pharmaceutical composition according to the present invention, or a kit according to the present invention, for use in the treatment or prevention of cancer.

[0691] In one aspect, the present invention provides an HSPC according to the present invention, for use in the treatment or prevention of cancer.

[0692] In one aspect, the present invention provides a population of HSPCs according to the present invention, for use in the treatment or prevention of cancer.

[0693] In one aspect, the present invention provides a method of treating or preventing cancer in a subject in need thereof, comprising the steps:

[0694] (a) providing an HSPC according to the present invention or a population of HSPCs according to the present invention; and

[0695] (b) administering the HSPC or population of HSPCs to the subject.

[0696] Hematopoietic stem cell transplants (HSCTs) are considered the best treatment option for many hematological malignancies (see e.g. Gratwohl, A., et al., 2003. *Leukemia*, 17(5), pp. 941-959) and is also a treatment option for patients with solid tumors (see e.g. Gratwohl, A., et al., 2004. *Annals of oncology*, 15(4), pp. 653-660).

[0697] In some embodiments the cancer is a hematological malignancy. Hematological malignancies may include acute myeloid leukemia (AML), acute lymphocytic leukemia

(ALL), chronic myeloid leukemia (CML), myelodysplastic syndromes (MDS), lymphoproliferative disorders (LPS) and multiple myeloma (MM).

[0698] In some embodiments the cancer is a solid tumor. Solid tumours may include neuroblastoma, glioma, soft tissue sarcoma, germ cell cancer, breast cancer, Ewing's sarcoma, lung cancer, ovarian cancer and other solid tumors.

Primary Immunodeficiency

[0699] In one aspect, the present invention provides a population of HSPCs, for use in a method of treating or preventing a primary immunodeficiency. The method may comprise an HSPC transplantation, as described herein.

[0700] In one aspect, the present invention provides a method of treating or preventing a primary immunodeficiency in a subject in need thereof. The method may comprise an HSPC transplantation, as described herein.

[0701] In one aspect, the present invention provides one or more HSPC mobiliser for use in a method of treating or preventing a primary immunodeficiency. The method may comprise an HSPC transplantation, as described herein.

[0702] In one aspect, the present invention provides an RNA polynucleotide according to the present invention, a DNA polynucleotide according to the present invention, a vector according to the present invention, a cell according to the present invention, a pharmaceutical composition according to the present invention, or a kit according to the present invention, for use in the treatment or prevention of a primary immunodeficiency.

[0703] In one aspect, the present invention provides an HSPC according to the present invention, for use in the treatment or prevention of a primary immunodeficiency.

[0704] In one aspect, the present invention provides a population of HSPCs according to the present invention, for use in the treatment or prevention of a primary immunodeficiency.

[0705] In one aspect, the present invention provides a method of treating or preventing a primary immunodeficiency in a subject in need thereof, comprising the steps:

[0706] (a) providing an HSPC according to the present invention or a population of HSPCs according to the present invention; and

[0707] (b) administering the HSPC or population of HSPCs to the subject.

[0708] Primary immunodeficiencies (PIDs) are a group of heritable disorders that result in an underdeveloped and/or functionally compromised immune system. There are over 430 recognized PIDs as of 2019 (Tangye, S. G., et al., 2020. *Journal of clinical immunology*, 40(1), pp. 24-64). Patients with severe PIDs experience increase morbidity and mortality and display diverse clinical phenotypes. SCT using HSPCs from an HLA-matched donor can confer a lifelong 'cure', with a success rate of more than 90% (see e.g. Ferrari, G., et al., 2021. *Nature Reviews Genetics*, 22(4), pp. 216-234).

[0709] In some embodiments, the primary immunodeficiency is human primary combined immunodeficiency Hyper IgM Syndrome 1 (HIGM-1).

Lysosomal Storage Disorders

[0710] In one aspect, the present invention provides a population of HSPCs, for use in a method of treating or

preventing a lysosomal storage disorder. The method may comprise an HSPC transplantation, as described herein.

[0711] In one aspect, the present invention provides a method of treating or preventing a lysosomal storage disorder in a subject in need thereof. The method may comprise an HSPC transplantation, as described herein.

[0712] In one aspect, the present invention provides one or more HSPC mobiliser for use in a method of treating or preventing a lysosomal storage disorder. The method may comprise an HSPC transplantation, as described herein.

[0713] In one aspect, the present invention provides an RNA polynucleotide according to the present invention, a DNA polynucleotide according to the present invention, a vector according to the present invention, a cell according to the present invention, a pharmaceutical composition according to the present invention, or a kit according to the present invention, for use in the treatment or prevention of a lysosomal storage disorder.

[0714] In one aspect, the present invention provides an HSPC according to the present invention, for use in the treatment or prevention of a lysosomal storage disorder.

[0715] In one aspect, the present invention provides a population of HSPCs according to the present invention, for use in the treatment or prevention of a lysosomal storage disorder.

[0716] In one aspect, the present invention provides a method of treating or preventing a lysosomal storage disorder in a subject in need thereof, comprising the steps:

[0717] (a) providing an HSPC according to the present invention or a population of HSPCs according to the present invention; and

[0718] (b) administering the HSPC or population of HSPCs to the subject.

[0719] Lysosomal storage diseases (LSDs) are a group of over 70 inherited metabolic disorders that result from defects in lysosomal function (Platt, F. M., et al., 2018. *Nature Reviews Disease Primers*, 4(1), pp. 1-25). HSCT is currently the standard of care for infants with Hurler syndrome, and has also been used for other LSDs for which no other treatment was available, the most prominent being metachromatic leukodystrophy and Krabbe disease. In some embodiments, the lysosomal storage disorder is Hurler syndrome.

Non-Malignant Hematological Disorders

[0720] In one aspect, the present invention provides a population of HSPCs, for use in a method of treating or preventing a non-malignant hematological disorder. The method may comprise an HSPC transplantation, as described herein.

[0721] In one aspect, the present invention provides a method of treating or preventing a non-malignant hematological disorder in a subject in need thereof. The method may comprise an HSPC transplantation, as described herein.

[0722] In one aspect, the present invention provides one or more HSPC mobiliser for use in a method of treating or preventing a non-malignant hematological disorder. The method may comprise an HSPC transplantation, as described herein.

[0723] In one aspect, the present invention provides an RNA polynucleotide according to the present invention, a DNA polynucleotide according to the present invention, a vector according to the present invention, a cell according to the present invention, a pharmaceutical composition accord-

ing to the present invention, or a kit according to the present invention, for use in the treatment or prevention of a non-malignant hematological disorder.

[0724] In one aspect, the present invention provides an HSPC according to the present invention, for use in the treatment or prevention of a non-malignant hematological disorder.

[0725] In one aspect, the present invention provides a population of HSPCs according to the present invention, for use in the treatment or prevention of a non-malignant hematological disorder.

[0726] In one aspect, the present invention provides a method of treating or preventing a non-malignant hematological disorder in a subject in need thereof, comprising the steps:

[0727] (a) providing an HSPC according to the present invention or a population of HSPCs according to the present invention; and

[0728] (b) administering the HSPC or population of HSPCs to the subject.

[0729] Hematopoietic stem cell transplantation (HSCT) is a potentially curative modality for a variety of non-malignant hematological disorders involving bone marrow (BM) failure and thalassemia. It has been successfully used as a replacement therapy for patients with severe aplastic anemia (SAA), B-thalassemia major (BTM), Fanconi anemia (FA), immunodeficiency diseases (ID) and inherited metabolic disorders (IMD) (see e.g. Mahmoud, H. K., et al., 2015. Journal of Advanced Research, 6(3), pp. 449-458).

[0730] In some embodiments, the non-malignant hematological disorder is a haemoglobinopathy. Hemoglobinopathy may refer to a group of inherited blood disorders and diseases that primarily affect red blood cells. There are two main groups: abnormal structural hemoglobin variants caused by mutations in the hemoglobin genes, and the thalassemias, which are caused by an underproduction of otherwise normal hemoglobin molecules. The main structural hemoglobin variants are HbS, HbE and HbC. The main types of thalassemia are alpha-thalassemia and beta thalassemia. In some embodiments, the haemoglobinopathy is a thalassemia or sickle cell disease. In some embodiments, the haemoglobinopathy is beta thalassemia or sickle cell disease.

Variants, Derivatives, Analogues, Homologues and Fragments

[0731] In addition to the specific polypeptides and polynucleotides mentioned herein, the invention also encompasses the use of variants, derivatives, analogues, homologues and fragments thereof.

[0732] In the context of the invention, a variant of any given sequence is a sequence in which the specific sequence of residues (whether amino acid or nucleic acid residues) has been modified in such a manner that the polypeptide or polynucleotide in question substantially retains at least one of its functions. A variant sequence can be obtained by addition, deletion, substitution, modification, replacement and/or variation of at least one residue present in the naturally-occurring protein.

[0733] The term “derivative” as used herein, in relation to proteins or polypeptides of the invention includes any substitution of, variation of, modification of, replacement of, deletion of and/or addition of one (or more) amino acid

residues from or to the sequence providing that the resultant protein or polypeptide substantially retains at least one of its functions.

[0734] The term “analogue” as used herein, in relation to polypeptides or polynucleotides includes any mimetic, that is, a chemical compound that possesses at least one of the endogenous functions of the polypeptides or polynucleotides which it mimics.

[0735] Typically, amino acid substitutions may be made, for example from 1, 2 or 3 to 10 or 20 substitutions provided that the modified sequence substantially retains the required activity or ability. Amino acid substitutions may include the use of non-naturally occurring analogues. Proteins used in the invention may also have deletions, insertions or substitutions of amino acid residues which produce a silent change and result in a functionally equivalent protein. Deliberate amino acid substitutions may be made on the basis of similarity in polarity, charge, solubility, hydrophobicity, hydrophilicity and/or the amphipathic nature of the residues as long as the endogenous function is retained. For example, negatively charged amino acids include aspartic acid and glutamic acid; positively charged amino acids include lysine and arginine; and amino acids with uncharged polar head groups having similar hydrophilicity values include asparagine, glutamine, serine, threonine and tyrosine.

[0736] Conservative substitutions may be made, for example according to the table below. Amino acids in the same block in the second column and preferably in the same line in the third column may be substituted for each other:

ALIPHATIC	Non-polar	G A P I L V
	Polar - uncharged	C S T M N Q
	Polar - charged	D E K R H
	AROMATIC	F W Y

[0737] The term “homologue” as used herein means an entity having a certain homology with the wild type amino acid sequence and the wild type nucleotide sequence. The term “homology” can be equated with “identity”.

[0738] A homologous sequence may include an amino acid sequence which may be at least 50%, at least 55%, at least 60%, at least 65%, at least 70%, at least 75%, at least 80%, at least 85%, at least 90%, at least 91%, at least 92%, at least 93%, at least 94%, at least 95%, at least 96%, at least 97%, at least 98%, or at least 99% identical, preferably at least 95%, at least 96%, at least 97%, at least 98%, or at least 99% identical to the subject sequence. Typically, the homologues will comprise the same active sites etc. as the subject amino acid sequence. Although homology can also be considered in terms of similarity (i.e. amino acid residues having similar chemical properties/functions), in the context of the invention it is preferred to express homology in terms of sequence identity.

[0739] A homologous sequence may include a nucleotide sequence which may be at least 50%, at least 55%, at least 60%, at least 65%, at least 70%, at least 75%, at least 80%, at least 85%, at least 90%, at least 91%, at least 92%, at least 93%, at least 94%, at least 95%, at least 96%, at least 97%, at least 98%, or at least 99% identical, preferably at least 95%, at least 96%, at least 97%, at least 98%, or at least 99% identical to the subject sequence. Although homology can

also be considered in terms of similarity, in the context of the invention it is preferred to express homology in terms of sequence identity.

[0740] Preferably, reference to a sequence which has a percent identity to any one of the SEQ ID NOs detailed herein refers to a sequence which has the stated percent identity over the entire length of the SEQ ID NO referred to.

[0741] Homology comparisons can be conducted by eye or, more usually, with the aid of readily available sequence comparison programs. These commercially available computer programs can calculate percentage homology or identity between two or more sequences.

[0742] Percentage homology may be calculated over contiguous sequences, i.e. one sequence is aligned with the other sequence and each amino acid in one sequence is directly compared with the corresponding amino acid in the other sequence, one residue at a time. This is called an “ungapped” alignment. Typically, such ungapped alignments are performed only over a relatively short number of residues.

[0743] Although this is a very simple and consistent method, it fails to take into consideration that, for example, in an otherwise identical pair of sequences, one insertion or deletion in the nucleotide sequence may cause the following codons to be put out of alignment, thus potentially resulting in a large reduction in percent homology when a global alignment is performed. Consequently, most sequence comparison methods are designed to produce optimal alignments that take into consideration possible insertions and deletions without penalising unduly the overall homology score. This is achieved by inserting “gaps” in the sequence alignment to try to maximise local homology.

[0744] However, these more complex methods assign “gap penalties” to each gap that occurs in the alignment so that, for the same number of identical amino acids, a sequence alignment with as few gaps as possible, reflecting higher relatedness between the two compared sequences, will achieve a higher score than one with many gaps. “Affine gap costs” are typically used that charge a relatively high cost for the existence of a gap and a smaller penalty for each subsequent residue in the gap. This is the most commonly used gap scoring system. High gap penalties will of course produce optimised alignments with fewer gaps. Most alignment programs allow the gap penalties to be modified. However, it is preferred to use the default values when using such software for sequence comparisons. For example when using the GCG Wisconsin Bestfit package the default gap penalty for amino acid sequences is -12 for a gap and -4 for each extension.

[0745] Calculation of maximum percentage homology therefore firstly requires the production of an optimal alignment, taking into consideration gap penalties. A suitable computer program for carrying out such an alignment is the GCG Wisconsin Bestfit package (University of Wisconsin, U.S.A.; Devereux et al. (1984) *Nucleic Acids Res.* 12: 387). Examples of other software that can perform sequence comparisons include, but are not limited to, the BLAST package (see Ausubel et al. (1999) *ibid*—Ch. 18), FASTA (Atschul et al. (1990) *J. Mol. Biol.* 403-410) and the GENEWORKS suite of comparison tools. Both BLAST and FASTA are available for offline and online searching (see Ausubel et al. (1999) *ibid*, pages 7-58 to 7-60). However, for some applications, it is preferred to use the GCG Bestfit program. Another tool, called BLAST 2 Sequences is also

available for comparing protein and nucleotide sequences (see FEMS Microbiol. Lett. (1999) 174: 247-50; FEMS Microbiol. Lett. (1999) 177: 187-8).

[0746] Although the final percent homology can be measured in terms of identity, the alignment process itself is typically not based on an all-or-nothing pair comparison. Instead, a scaled similarity score matrix is generally used that assigns scores to each pairwise comparison based on chemical similarity or evolutionary distance. An example of such a matrix commonly used is the BLOSUM62 matrix—the default matrix for the BLAST suite of programs. GCG Wisconsin programs generally use either the public default values or a custom symbol comparison table if supplied (see the user manual for further details). For some applications, it is preferred to use the public default values for the GCG package, or in the case of other software, the default matrix, such as BLOSUM62.

[0747] Once the software has produced an optimal alignment, it is possible to calculate percent homology, preferably percent sequence identity. The software typically does this as part of the sequence comparison and generates a numerical result.

[0748] “Fragments” are also variants and the term typically refers to a selected region of the polypeptide or polynucleotide that is of interest either functionally or, for example, in an assay. “Fragment” thus refers to an amino acid or nucleic acid sequence that is a portion of a full-length polypeptide or polynucleotide.

[0749] Variants may be prepared using standard recombinant DNA techniques such as site-directed mutagenesis. Where insertions are to be made, synthetic DNA encoding the insertion together with 5' and 3' flanking regions corresponding to the naturally-occurring sequence either side of the insertion site may be made. The flanking regions will contain convenient restriction sites corresponding to sites in the naturally-occurring sequence so that the sequence may be cut with the appropriate enzyme(s) and the synthetic DNA ligated into the cut. The DNA is then expressed in accordance with the invention to make the encoded protein. These methods are only illustrative of the numerous standard techniques known in the art for manipulation of DNA sequences and other known techniques may also be used.

[0750] The skilled person will understand that they can combine all features of the invention disclosed herein without departing from the scope of the invention as disclosed.

[0751] The practice of the present invention will employ, unless otherwise indicated, conventional techniques of chemistry, biochemistry, molecular biology, microbiology and immunology, which are within the capabilities of a person of ordinary skill in the art. Such techniques are explained in the literature. See, for example, Sambrook, J., Fritsch, E. F. and Maniatis, T. (1989) *Molecular Cloning: A Laboratory Manual*, 2nd Edition, Cold Spring Harbor Laboratory Press; Ausubel, F. M. et al. (1995 and periodic supplements) *Current Protocols in Molecular Biology*, Ch. 9, 13 and 16, John Wiley & Sons; Roe, B., Crabtree, J. and Kahn, A. (1996) *DNA Isolation and Sequencing: Essential Techniques*, John Wiley & Sons; Polak, J. M. and McGee, J. O'D. (1990) *In Situ Hybridization: Principles and Practice*, Oxford University Press; Gait, M. J. (1984) *Oligonucleotide Synthesis: A Practical Approach*, IRL Press; and Lilley, D. M. and Dahlberg, J. E. (1992) *Methods in Enzymology*:

DNA Structures Part A: Synthesis and Physical Analysis of DNA, Academic Press. Each of these general texts is herein incorporated by reference.

EXAMPLES

[0752] Preferred features and embodiments of the invention will now be described by way of non-limiting examples.

Example 1—Chemotherapy-Free Engraftment of Gene Edited Human Hematopoietic Stem Cells Leveraged on Mobilization and mRNA-Based Engineering

Long-Term Donor Chimerism is Established by Mobilization-Based HSCT

[0753] Mobilization regimens, while inducing substantial egress of resident HSPCs from the BM, might also per se avail space for newly transplanted cells. Thus, transplanting HSPCs at the peak of mobilization might enable competition with mobilized recipient cells to repopulate the BM niches, establishing some levels of donor chimerism (FIG. 6A).

[0754] We tested two mobilization regimens in mice, one modeling a clinically approved protocol using G-CSF and AMD3100 (G7A), and the other one also comprising BIO5192 (G7AB). C57BL/6J CD45.2 mice were treated with G-CSF using a subcutaneous pump for a week combined with either AMD3100, or the combination of AMD3100 and BIO5192, delivered intraperitoneally at day 6 and 7 (FIG. 1A; FIG. 6B).

[0755] We assessed mobilization three hours post-AMD3100 injection and showed a 6-fold increase in White Blood Cells (WBC) counts, an 8-fold increase in progenitors (Lin[−] SCA1⁺ KIT⁺; LSK) and a 200-fold increase in the HSC-enriched fraction (LSK CD150⁺ CD48[−]; SLAM HSC) in the circulation (FIG. 1B; FIG. 6C), compared to non-mobilized control mice (Sham). The addition of BIO5192 led to a higher mobilization of WBC, LSK and SLAM HSC, leading to an additional 2-fold increase of SLAM HSC over G7A levels.

[0756] To test if these levels of mobilization, and the subsequent BM niche availability, were sufficient to allow engraftment of donor cells, 2×10⁶ CD45.1 lineage negative (Lin[−]) cells, purified from the BM, were transplanted into CD45.2 congenic recipients after the last injection of AMD3100 or AMD3100/BIO5192 (FIG. 1A, C; FIG. 6D).

[0757] Donor chimerism reached a median of 20% following the G-CSF/AMD3100 mobilization protocol, and the addition of BIO5192 further increased it to 30%. Chimerism was stable for up to 24 weeks (FIG. 1D), while only a minimal donor chimerism was observed in non-mobilized control mice (<1%).

[0758] The myeloid and lymphoid proportion was similar between mobilized and non-mobilized control mice (FIG. 1E, left panel). Donor cells showed a myeloid skewed output in the first weeks after engraftment, likely consistent with early repopulation by short-term progenitors (FIG. 1E, right panel). However, by the end of the experiment, donor cells and recipient cells were similar in terms of lineage composition (FIG. 1E). The chimerism was maintained among differentiated cell subsets, i.e. T cells (CD4 and CD8), B cells (CD19) and myeloid cells (CD11b) in the PB (FIG. 1F), BM (FIG. 1G), including within LSK and SLAM HSC

(FIG. 1H), and spleen (FIG. 1I), and the lineage distribution was similar for cells of recipient and donor origin in both organs (FIG. 1J-K).

[0759] Overall, these data support engraftment of donor long-term multilineage HSPCs. These findings established proof-of-principle of a low-burden HSCT, which entails an exchange of resident with donor HSPCs during mobilization without genotoxic conditioning, hereafter referred to as mobilization-enabled HSCT (M-HSCT).

M-HSCT Allows Establishing Sufficient Donor Chimerism to Rescue the HIGM-1 Phenotype

[0760] To investigate the therapeutic potential of M-HSCT, we took advantage of Cd40lg^{−/−} mice, which faithfully recapitulate the phenotype of the human primary combined immunodeficiency Hyper IgM Syndrome 1 (HIGM-1; Renshaw, B. R., et al. (1994). J Exp Medicine 180, 1889-1900). Because G-CSF treatment may have a detrimental effect on the BM niche, we investigated the efficiency of mobilization protocols differing for its presence or absence, the G-CSF dose and the duration and combination with other drugs (FIG. 2A).

[0761] Removing G-CSF or reducing its dose or treatment time, significantly decreased the mobilization of LSK and SLAM HSC. PB analysis revealed a peak of mobilization of WBC, LSK and SLAM HSC around 3 hours post-AMD3100 or AMD3100/BIO5192 injection (FIG. 2B-D). The addition of AMD3100 to the standard G-CSF treatment increased the mobilized LSK by 3-fold, and BIO5192 further increased it by 5-fold (FIG. 2C). The levels of mobilization observed in Cd40lg^{−/−} mice were comparable to those obtained in the WT mice (FIG. 7A).

[0762] While administration of only AMD3100/BIO5192 had limited impact on blood neutrophils and monocytes counts, they were highly increased after G-CSF treatment (FIG. 7B-D). Moreover, G-CSF treatment increased MMP9, a protease released by myeloid cells, and decreased CXCL12, a chemokine involved in HSPC homing and retention, in the BM stroma, confirming remodeling of extracellular matrix (FIG. 2E-F; FIG. 7E). Intriguingly, when we compared the level of CXCR4 expression on circulating SLAM HSC with or without G-CSF mobilization, we found that it was lower in the former condition, suggesting induced cleavage of the molecule (FIG. 7F). By comparing the number of SLAM HSC in lower limbs BM of untreated and mobilized mice, at the peak of mobilization, we found a 55% decrease in the latter condition (FIG. 2G; left panel). However, only 75% of these cells could be accounted for in the PB (FIG. 2G; right panel), suggesting that some of the egressed cells became trapped in other organs, such as the spleen.

[0763] Since current editing protocols are considerably less efficient and more detrimental for mouse cells than for the human counterpart, we transplanted 2×10⁶ WT CD45.1 Lin[−] cells, purified from the BM, as surrogate of autologous gene corrected cells and transplanted them into Cd40lg^{−/−} recipients at the peak of mobilization following the G-CSF, AMD3100 and BIO5192 regimen (FIG. 7G). A stable chimerism of about 30% WT cells was reached across all lineages and differentiated cells in PB (FIG. 2H; FIG. 7H), spleen (FIG. 7I) and BM (FIG. 7J-K) of transplanted mice. By the end of the experiment, cellular subsets were comparable in recipient versus donor cells, and between the

non-mobilized (Sham) and mobilized group (G7AB) in the PB (FIG. 2I), BM (FIG. 2J) and spleen (FIG. 2K).

[0764] Intriguingly, the chimerism experimentally obtained was higher than our estimate of approximate 20% based on data from FIG. 2G and the following postulates: (i) mobilization occurred to the same extent throughout all the mouse BM, (ii) the lower limbs account for 20% of it and (iii) the mobilized and infused cells compete equally. This finding suggests an advantage of the cells harvested from the donor BM and not exposed to the mobilization procedure, possibly conferred by the higher expression of CXCR4 (FIG. 7F) in the context of a limiting amount of CXCL12, highlighting a favorable window of opportunity for engraftment of donor HSPCs right upon mobilization.

[0765] To investigate the dynamic of niche repopulation in the context of mobilization, we transplanted 2×10^6 WT CD45.1 Lin⁻ cells, purified from the BM, following different mobilization protocols. We observed that despite transplanting the same number of cells, the chimerism falls with lower mobilization efficiency. Despite infusing 7 times more donor cells than mobilized ones, the chimerism remained low, indicating that residual non mobilized cells are limiting the exchange, most likely by occupying the niche (FIG. 7L). On the other hand, when varying the numbers of transplanted cells below the saturating dose in mice mobilized with the same protocol, we found a dose dependent engraftment (FIG. 7M).

[0766] We then vaccinated the mice with a thymus-dependent antigen (TNP-KLH) and measured whether immunoglobulin (IgG) class switching was restored by the transplantation. Whereas non-mobilized Cd40Ig^{-/-} mice produced nearly undetectable amounts of antigen-specific IgGs, M-HSCT treated mice showed a significant rescue in switched-antibody responses to the primary and recall vaccinations (FIG. 2L). Partial rescue of immune function in transplanted mice was also shown by the presence of splenic germinal B cells, whereas non-mobilized mice failed to engage B cells for germinal center formation (FIG. 2M).

[0767] Overall, these findings show the potential of M-HSCT for rescue of the humoral immune response in HIGM-1 mice without the requirement of a conditioning regimen.

M-HSCT Allows Efficient Donor to Recipient Exchange of HSPCs within the Human Niche of Hematochimeric Mice

[0768] We next embarked in modeling the feasibility of M-HSCT in humans by using hematochimeric NOD.Cg-Kit^{W41J} Prkdc^{scid} Il2rg^{tm1 Wjl}/WaskJ (NSGW41) mice, which harbor a mutant Kit receptor decreasing the competition with human HSPCs. We first set up an in vivo model of human HSPC mobilization. NSGW41 mice were transplanted with 3×10^5 G-CSF mobilized PB (mPB) derived CD34⁺ cells and, once hematopoietic engraftment was established (FIG. 3A), mice were treated with the combination mobilization protocol optimized above (G7AB).

[0769] Mobilization led to a substantial increase in WBC counts, murine (LSK) and human (CD34⁺ CD38⁻) progenitors (FIG. 3B). Of note, mobilized human CD34⁺ CD38⁻ cells peaked 3 hours after the last administration of mobilizers, suggesting this time as the best candidate for transplanting human donor cells. In line with PB results, we showed up to 65% decrease in human CD34⁺ CD38⁻ cells in the BM of mobilized mice. This decrease was concurrent with an increase of human CD34⁺ CD38⁻ cells in PB, accounting for 60% of the egressed cells (FIG. 3C).

[0770] We then tested CD34⁺ CD38⁻ cells exchange post-mobilization, by transplanting the outgrowth of 1×10^5 CD34⁺ cells, counted on day 1 post-thawing (FIG. 3D). Prior to infusion, mPB cells from the same donor were transduced with GFP-expressing LV (FIG. 3D-E), to distinguish them from the previously engrafted and now resident cells. This culture step, which models a LV-based gene replacement protocol for therapeutic purposes, led to an increased expression of CXCR4, KIT and ITGA4 (all involved in HSPC homing and retention), counteracting the effect of thawing and prior in vivo G-CSF exposure (FIG. 3F; FIG. 8A-G). Intriguingly, mobilized cells showed increasing CXCR4 MFI upon culture when immunostaining with an N-terminus directed antibody, consistent with the reported N-terminal cleavage of the molecule upon exposure to G-CSF and rescued expression of the full-size molecule in culture.

[0771] The size of the human graft continued to increase over time in non-mobilized mice but comprising only a low % of GFP⁺ cells (<1%) even at late time points, showing that in the absence of mobilization there is no engraftment of the newly infused cells (FIG. 3G). On the contrary, when mice received the mobilization treatment, the human graft initially decreased but was then followed by a rescue accompanied by an increasing fraction of GFP⁺ cells, suggesting that these cells were able to effectively compete with the mobilized ones. At the end of the experiment, GFP⁺ cells were a median of 30% of the human graft and found within all human lineages present in the blood of mobilized mice (CD19⁺ B cells, CD13⁺ myeloid cells and CD3⁺ T cells), while being nearly absent in non-mobilized ones (FIG. 3G-1).

[0772] Lineage composition was similar between mobilized and non-mobilized mice (FIG. 3J, left panel). Interestingly, GFP⁺ cells showed a myeloid skewed output in the first weeks after transplantation, as observed for newly engrafting progenitors in the C57BL/6J mouse model above (FIG. 3J, right panel). However, GFP⁺ cells were found in all detectable lineages in the following weeks and approached the lineage distribution of the total human graft at the end of the experiment (FIG. 3J). In the BM, spleen and thymus, the human graft levels were similar in mobilized and non-mobilized mice, while the GFP⁺ cells reached up to 30% in the mobilized mice (FIG. 3K-L). Non-mobilized mice had GFP⁺ engraftment below 1%. The lineage distribution between the total human graft and the GFP⁺ cells was similar in all the organs (FIG. 3M-R), with comparable levels of chimerism across all cell subsets, including the most primitive progenitors (HSPCs: CD34⁺ CD38⁻ CD90⁺; FIG. 3S-T), indicating stable and functional engraftment.

[0773] These data show that partial chimerism of ex vivo modified HSPCs may potentially be established for human hematopoiesis following M-HSCT and without prior conditioning.

Transient Overexpression of CXCR4 Increases Chimerism in the Humanized Context, Following M-HSCT

[0774] We sought to further improve the engraftment of HSPCs by exploiting transient overexpression of CXCR4.

[0775] We optimized a transient in vitro transcription (IVT) platform testing different 5'/3'UTR sequences, polyadenylation tail lengths and capping (FIG. 9A-D). Our starting construct, pVAX, contained an ARCA capping, followed by a Kozak sequence, a WPRE sequence and a 60

bp polyA tail. The optimized pVAXi construct comprised an AG CleanCap, an Eif4 aptamer at the 5'UTR, a WPRE sequence at the 3' UTR, followed by a 150 bp polyA tail. Modified uridine (pseudouridine) was incorporated during the mRNA synthesis, followed by HPLC purification, necessary to alleviate interferon response in electroporated cells (FIG. 9E-H).

[0776] CXCR4 mRNA electroporation led to an increase in cells expressing CXCR4 and its MFI in the bulk CD34⁺ population (FIG. 4A-B) and in primitive HSPCs (CD34⁺ CD38⁻ CD90⁺; FIG. 4C-D) for up to 3 days. Transmigration assays were used to determine the impact of CXCR4 overexpression on cell migration. HSPCs overexpressing CXCR4, including the more primitive subset, migrated more toward CXCL12, compared to control cells electroporated with GFP mRNA (FIG. 4E-F; FIG. 9I-L). We tested two isoforms of CXCR4, differing from 9 amino acid at the N-terminus (Duquenne, C., et al. (2014). *J Immunol* 193, 4188-4194; Gupta, S. K., and Pillarisetti, K. (1999). *J Immunol Baltim Md* 1950 163, 2368-2372). Isoform 1 led to higher response to CXCL12 and was used for the subsequent experiments (FIG. 4G-I).

[0777] Impact of CXCR4 overexpression on engraftment was first evaluated in immunodeficient NOD-SCID-IL2Rg^{-/-} (NSG) mice. Cells transiently overexpressing CXCR4 yielded a larger human graft in the PB, reaching a median of 45% human chimerism compared to 35% of cells overexpressing control GFP (FIG. 4J). The lineage distribution was similar in both groups in PB, BM, spleen and thymus (FIG. 4K-L; FIG. 10A-B). Interestingly, BM analysis showed an increased representation of the most primitive fraction of human HSPCs in mice transplanted with CXCR4 overexpressing cells (FIG. 4M).

[0778] We next tested the potential advantage contributed by CXCR4 overexpression in niche re-colonization upon M-HSCT. NSGW41 mice stably engrafted with 3×10⁵ CD34⁺ cells were treated for mobilization, then infused with the outgrowth of 2×10⁵ cells, counted at day 1 post thawing, transduced with GFP-LV and transiently overexpressing CXCR4 mRNA from the same donor as the original transplant. In parallel, control mice were transplanted, after mobilization, with HSPCs transduced with GFP-LV and transiently overexpressing GFP mRNA (FIG. 4N).

[0779] CXCR4 overexpressing cells efficiently outcompeted the mobilized HSPCs and established a stable chimerism in the human cell graft, while control cells overexpressing GFP engrafted to a lower extent (FIG. 4O-Q). Furthermore, we confirmed that mobilization was indispensable to obtain chimerism with the newly infused cells, whether advantaged or not by CXCR4 overexpression, as observed by the lack of engrafted GFP⁺ cells in non-mobilized mice.

[0780] By the end of the experiment, lineage composition was similar in mobilized and non-mobilized mice in PB (FIG. 4R), and the chimerism in each subset remained stable (FIG. 4S). These results were confirmed in the spleen, BM and thymus, where higher levels of GFP were detectable in mice transplanted with cells initially overexpressing CXCR4, without impacting the proportion of progenitors and differentiating cells within the different hematopoietic organs (FIG. 10C-H).

[0781] Secondary transplants of matched numbers of human CD34⁺ cells purified from the BM of primary transplanted mice revealed the presence of human GFP+

grafts in mice transplanted with cells harvested from mobilized groups only, proving successful engraftment of LT-HSC following M-HSCT (FIG. 4T). Moreover, the percentage of GFP⁺ cells in the secondary recipients was higher in the group transplanted with human cells from primary recipients of CD34⁺ cell transiently overexpressing CXCR4, versus cell transiently overexpressing control GFP mRNA, emphasizing the advantage of using an engraftment enhancer (FIG. 4U).

M-HSCT Confers a Clear Advantage to Gene Edited Cells when Paired with an Engraftment Enhancer

[0782] EX vivo gene correction in autologous HSCT may decrease engraftment efficiency, especially when achieved by gene editing. We first monitored the expression of CXCR4 in cells edited for the site-specific integration of a GFP-expressing cassette into the Adeno-Associated Virus Integration Site 1 (AAVS1) safe harbor locus using a recently optimized protocol. CD34⁺ cells were electroporated with Cas9 RNP assembled with sgRNA targeting AAVS1 and editing enhancers (GSE56/Ad5-E4orf6/7), and immediately transduced with a repair template carrying AAV6-GFP vector (FIG. 11A). CXCR4 expression was decreased in gene-edited cells as compared to electroporated-only cells (FIG. 5A).

[0783] To counteract this adverse impact on CXCR4, we co-electroporated cells with CXCR4 mRNA combined with all the gene editing machinery. The control counterparts received GFP mRNA with the same gene editing machinery. While gene edited cells with or without GFP overexpression had decreased migration potential, gene edited HSPCs overexpressing CXCR4 showed higher migration potential in an in vitro migration assay, even when compared to electroporated-only control cells (FIG. 5B).

[0784] We next tested whether CXCR4 overexpression could provide an engraftment advantage to edited cells. While the chimerism level of edited cells (stably expressing GFP) only reached a median of 5% for the standard treatment, addition of CXCR4 mRNA allowed a 3-fold enhanced engraftment reaching a median of 15% (FIG. 5C-D). Intriguingly, because HDR efficiency was around 40% as measured in the more primitive subset in vitro (FIG. 11B), the total chimerism reached in vivo by cells edited together with CXCR4 mRNA would correspond to the levels reached by LV-transduced cells and electroporated with CXCR4 mRNA in the previous experiment (40% GFP for cells transduced by LV to 90%). This result supports our previously reported finding that editing with optimized enhancers contains the impact of the procedure on HSPC repopulation properties. Lineage proportion within PB, BM and spleen were similar for edited and non-edited cells, with or without initial overexpression of CXCR4 (FIG. 11C-H).

[0785] Overall, these findings show the portability of our strategy across different genetic engineering strategies and the feasibility of establishing a human hematopoietic graft comprising a fraction of edited cells sufficient for providing therapeutic benefits in diseases such as HIGM-1, without resorting to any preconditioning.

[0786] Whereas the results of M-HSCT as described here are already promising, multiple strategies could be used to improve its efficacy further. We tested different variants of CXCR4 (Ierano, C., et al. (2009). *Cell Cycle* 8, 1228-1237; McDermott, D. H., et al. (2011). *J Cell Mol Med* 15, 2071-2081; Rosenkilde, M. M., et al. (2004). *J Biol Chem* 279, 3033-3041; and Rosenkilde, M. M., et al. (2007). *J Biol*

Chem 282, 27354-27365), which all led to an increased surface over-expression of CXCR4 and were able to endow HSPCs with a further migration advantage (FIG. 5E; FIG. 11I-J). Interestingly, two of these variants were resistant to AMD3100 and even more to AMD3465, while keeping an efficient response to CXCL12, as shown by migration of overexpressing cells in the presence of CXCR4 antagonists (FIG. 5F-G). These variants could be used in the context of M-HSCT to further enhance the competitive advantage of infused cells over the mobilized cells and, conceivably, the extent of chimerism established.

[0787] Moreover, other molecules could be exploited beside CXCR4 for endowing the infused cells with a transient competitive advantage. We showed that overexpression of KIT, ITGA4 and CD47 mRNA could all provide an in vivo engraftment advantage (FIG. 5H), similar or even higher than that shown for CXCR4, to infused human cells in the context of M-HSCT, supporting its versatility and broad potential when coupled to mRNA-based genetic engineering of the administered cells.

Mobilization-based HSCT (H-HSCT)

[0788] Here we provide evidence that HSPC mobilization might be successfully exploited in HSCT taking advantage of a window of opportunity opened at the peak of mobilization when donor cells might effectively outcompete those in the circulation for repopulation of the depleted BM niches. Competitive advantage of donor cells results from the rescue during ex vivo culture of a detrimental impact of mobilizers on HSPCs and might be further enhanced by transient over-expression of engraftment effectors. We present proof-of-principle of the therapeutic efficacy of M-HSCT in a mouse model of HIGM-1, although using healthy BM cells as surrogate of autologous genetically corrected ones, and further developed it using human hematohimic mouse models showing its applicability to human HSPCs and its versatility when coupled to different genetic engineering strategies, such as gene replacement and gene editing. Overall, our findings encourage the eventual disposal of conventional genotoxic conditioning when designing autologous HSPC-GT and should pave the way to its broader and safer use in a relevant number of inherited diseases.

[0789] Whereas it is well established that mobilized HSPCs can home and successfully engraft in conditioned recipients, the processes underlying reconstitution to full niche occupancy are less well understood. Whether and to what extent residual HSPCs in the BM and those still in the circulation (in our case) compete with the infused ones in these processes is unknown. Infused HSPCs can be trapped in different non-hematopoietic locations and become phagocytosed, decreasing even more the effective therapeutic dose administered and engraftment. Our findings shed some lights on the dynamics and source of such competition. The short window of time used for M-HSCT suggests that early niche occupancy by the cells in the circulation prevents repopulation from the residual ones in the BM. This hypothesis is also supported by recent reports that describe the possibility of editing HSPCs in vivo, which requires prior cell mobilization and thus suggest that egressed cells from the niche may contribute to long-term haematopoiesis.

[0790] Our strategy is built-in the process of ex vivo HSPC engineering. The ex vivo culture allows recovery of surface molecules crucial for homing/engraftment and

whose expression has been lowered by the mobilization protocol. On the other hand, when genetic engineering has a detrimental impact on the engraftment or repopulation potential of the treated HSPCs, as reported for gene editing, HSPC fitness can be enhanced by transient overexpression of molecular targets involved in the homing process concomitantly to the genetic modification. Conceivably, this approach would also be compatible with a short process time, in which mobilized cells immediately undergo genetic engineering and exchange. Of note, in the clinical setting where HSPC harvest and M-HSCT were to be performed almost concurrently, mobilized cells in the recipient would have been depleted from the circulation at the time of infusion of the engineered ones thus further reducing competition for engraftment.

[0791] Using modified nucleotides and optimizing design of the mRNA increased the time and extent of expression in transfected cells without eliciting innate recognition and detrimental responses. Moreover, the adoption of an “mRNA-only” platform safeguards against the risk of even sporadic integration of the effector transgene into the cellular genome, thus allowing safe capture of powerful gain-of-function effectors to our purpose. These include homing receptors such as CXCR4, adhesion molecules such as ITGA4, and inhibitors of professional phagocytosis such as CD47 but might conceivably be extended to other genes involved in pathways such as self-renewal. Moreover, mRNA-based delivery of engraftment enhancers can be easily incorporated into the ex vivo gene editing process, without increasing its overall time or burden, except for the total amount of transfected mRNA, which must be comprised within the limits of cell tolerability.

[0792] Although the M-HSCT protocols described here comprise some reagents not yet approved for clinical use, several new mobilizers are emerging for clinical testing, such as GRO-Beta (CXCL2) that antagonizes CXCR2 (Fukuda, S., et al. (2007). *Blood* 110, 860-869). As these new reagents become clinically applicable, they may allow even more HSPC mobilization and, thus, more effective exchange, possibly allowing removal of G-CSF treatment. In this case, BM niches may be better preserved allowing faster hematopoietic reconstitution by the gene-corrected cells. It is likely that our strategy might be relatively blind to the nature and mechanisms of action of the mobilizers used, provided that efficient HSPC depletion is achieved, and the newly infused cells are suitably engineered to outcompete the residual ones. Although we have not specifically investigated here the toxicity profile of our strategy, we expect it to be in line with that associated to the clinical use of mobilizers, which have shown an excellent safety record with only minimal adverse effects reported (Mueller, M. M., et al. (2013). *Vox Sang* 104, 46-54.). Moreover, given the low toxicity associated with the mobilization protocol, serial administration of corrected cells from a stored cell product for multiple administration following mobilization cycles, can be envisioned to further increase engraftment.

[0793] Of note, the use of G-CSF and AMD3100 as preparative regimen for patients with severe combined immunodeficiency undergoing HSCT has been tested and reported as inefficient (Dvorak, C. C., et al. (2014). *Pediatr Transplant* 18, 602-608). However, the percentage of mobilized CD34⁺ cells in the PB were suboptimal highlighting a limited BM vacancy which might explain the low/absent chimerism. Moreover, donor CD34⁺ cells were mobilized

but not cultured *ex vivo*, thus potentially bearing a lower homing and engraftment potential as shown here. Interestingly, increased donor engraftment and event-free survival following addition of G-CSF/AMD3100 to the conditioning regimen of Wiskott-Aldrich Syndrome patients undergoing allogeneic HCT has been reported (Balashov, D., et al. (2018). *Biol Blood Marrow Tr* 24, 1432-1440). Similarly, mixed chimerism after G-CSF/AMD3100 administration in addition to a nonmyeloablative conditioning regimen in patients with acute myelogenous leukemia has been reported (Konopleva, M., et al. (2015). *Bone Marrow Transpl* 50, 939-946), further supporting the contention that mobilization may enhance engraftment of infused cells.

[0794] The strategies developed here could be useful in the context of HSCT-GT, given that autologous cells do not need to overcome immune barriers in the recipient and that a mixed chimerism ranging around 30% might be sufficient for therapeutic benefit in many diseases that are candidates for HSPC-GT (Zimmerman, C., and Shenoy, S. (2020). *Front Immunol* 11, 1791). These include most primary immunodeficiencies, but might also extend to hemoglobinopathies and some lysosomal storage disorders. Indeed, we provide here proof-of-principle of the phenotypic rescue of HIGM-1 by M-HSCT in the mouse model, albeit using wild-type cells as surrogate of edited cells. Allogeneic HSCT is the only curative treatment currently available for this disease, however matched donors are not always available, and the procedure is associated with high risk of graft rejection, GvHD, infections, liver failure, death; indeed, despite its curative potential, HSCT has little impact on ameliorating survival of HIGM-1 patients. Thus, therapeutic alternatives to treat patients safely and more effectively for whom HSCT is too risky are strongly needed. M-HSCT with autologous cells corrected by gene editing might represent a promising option, where the use of engraftment enhancers might also compensate for the limited efficiency of HDR in primitive HSPCs.

[0795] The combination of mobilization and increased engraftment efficiency investigated in our studies might provide a way to entirely bypass the requirement for chemo/radiotherapy in HSPC-GT, conferring long-term therapeutic benefits with considerably less risk and long-term toxicity to patients. Conditioning regimes based on selective immunodepletion might also fit our strategy, as matching engraftment enhancers could be used, such as a mutant KIT not recognized by the anti-KIT antibodies/immunotoxin used for depletion, according to the model demonstrated here for the AMD3100-resistant CXCR4 variant. The combination of our engraftment enhancement strategy with immunotoxin-based strategy or low-dose chemotherapy may further broaden its efficiency and applicability.

Methods

Mice

[0796] C57Bl/6 Ly45.1, C57Bl/6 Ly45.2 mice were purchased from Charles River Laboratory. Cd40lg^{-/-} (B6.129S2-Cd401gtm1lmx/J), humanized NSG or NSGW41 mice were purchased from The Jackson Laboratory and maintained in specific-pathogen-free (SPF) conditions. The procedures involving animals were designed and performed with the approval of the Animal Care and Use Committee of the San Raffaele Hospital (IACUC #818 for Cd40lg^{-/-}, #876

for NSGW41 and NSG) and communicated to the Italian Ministry of Health and local authorities according to Italian law.

Murine HSPC Transplantation Studies

[0797] Donor mice between 6 and 10 weeks of age were euthanized by CO₂, and BM cells were retrieved from femurs, tibias, and humeri. HSPCs were purified by Lin-selection using the mouse Lineage Cell Depletion Kit (Miltenyi Biotec) according to the manufacturer's instructions. Cells were then cultured (for 2 hours or overnight) in serum-free StemSpan medium (StemCell Technologies) containing penicillin, streptomycin, glutamine, and a combination of mouse cytokines (20 ng/ml IL-3, 100 ng/ml SCF, 100 ng/ml Flt-3L, 50 ng/ml TPO all from PeproTech), at a concentration of 2-5×10⁶ cells.ml⁻¹. Purified Lin⁻ cells were transplanted at a total dose of 2×10⁶ cells/mouse into 8 to 12-week-old mobilized mice, three hours after the last injection of AMD3100 and/or Bio5192. Serial collections of blood from the retro-orbital vein were performed to monitor the hematological parameters and donor cell engraftment. At the end of the experiment, BM, thymus and spleen, and lymph nodes were harvested and analyzed.

ELISA

[0798] For ELISA performed on BM matrix, femurs and tibias were repeatedly flushed with 1 mL of cold PBS. Cells were pelleted by centrifugation at 300 g for 10 minutes at 4° C., supernatant was then collected and stored at -80° C. ELISA has been performed following manufacturer instruction after a 1:100 dilution with 1× Assay Diluent for MMP9 (Thermo Scientific) or on undiluted BM matrix for CXCL12 (Sigma-Aldrich).

In Vivo Immunization and IgG Quantification

[0799] Mice were immunized by intraperitoneal injection (i.p.) with 100 µg of TNP-KLH (Lgc Biosearch Technologies) in Inject Alum Adjuvant (1:2) (ThermoFisher Scientific), as described before (Vavassori, V., et al. (2021). *Embo Mol Med* 13, e13545). Serum was collected at day 0, 7, and 14 after immunization. Mice were boosted as described above on day 21, and serum was collected on day 7 after re-challenge. For IgG quantification, the concentration of antigen-specific IgGs in mouse sera was determined by an enzyme-linked immunosorbent assay (ELISA). Plates were coated with 100 µL/well of 5 µg/ml TNP-KLH in carbonate buffer. Following incubation, plates were washed three times in PBS containing 0.05% Tween20 (Sigma-Aldrich) (Wash Buffer). The plates were then blocked for 1 h using 100 µL/well of PBS containing 1% Bovine Serum Albumine (BSA), followed by a washing step, as described above. Serum samples were serially diluted in wash buffer and 100 µL/well of each diluted sample was added into the plate and incubated for 2 h at room temperature. For determination of the plate background optical density (OD) values, some wells were incubated with wash buffer alone. Following incubation, plates were washed and 100 µL/well of HRP-conjugated goat anti-mouse (Southern Biotech 1:10,000) was added and incubated for 1 h at room temperature. After washing, the plates were incubated for 5 min with 3,3',5,5'-tetramethyl benzidine (TMB, Sigma-Aldrich) substrate at room temperature. The reaction was stopped by the addition of 50 µL of 1 M H₂SO₄. The OD values at 450 nm

were determined for each well using a Multiskan GO microplate reader (Thermo Fisher Scientific) and normalized to IgG1 standard curves. Results were expressed as mean of duplicate determinations.

Cell Line and Primary Cells

[0800] HEK293T cells were cultured in Iscove's modified Dulbecco's medium (Corning) supplemented with 10% heat-inactivated fetal bovine serum (Euroclone), 100 IU·ml⁻¹ penicillin, 100 µg·ml⁻¹ streptomycin and 2% glutamine.

[0801] G-CSF mPB CD34⁺ HSPCs and G-CSF/Mozobil mPB CD34⁺ HSPCs were purchased from Mobilized Leukopak (AllCells) according to TIGET-HPCT protocol approved by the San Raffaele Institute Bioethical Committee and purified with the CliniMACS CD34 Reagent System (Miltenyi Biotec) according to the manufacturer's instructions. HSPCs were seeded at the concentration of 1×10⁶ cells per ml in serum-free StemSpan medium (StemCell Technologies) supplemented with 100 IU·ml⁻¹ penicillin, 100 µg·ml⁻¹ streptomycin, 2% glutamine, 300 ng·ml⁻¹ hSCF, 300 ng·ml⁻¹ hFlt3-L, 100 ng·ml⁻¹ hTPO, 1 µM SR1, 35 nM UM171 and 10 µM PGE2 (except when a subsequent transduction is planned). All cells were cultured in a 5% CO2 humidified atmosphere at 37° C. In vivo, the human HSPC population was defined as CD34⁺ CD38⁻ CD90⁺, and in vitro as CD34⁺ CD133⁺ CD90⁺.

LV Vector Production and Titration

[0802] VSV.G-pseudotyped third-generation self-inactivating SINLV were produced by calcium phosphate transient transfection into 293T cells. 293T cells were transfected with a solution containing a mix of the LV genome transfer plasmid, bearing the expression cassette for GFP, the packaging plasmids pMDLg/pRRE, pMD2.VSV.G, pKRev (pILVV01) and pAdVantage (Promega). Medium was changed 14-16 hours after transfection and supernatant was collected 30 hours after medium change. LV-containing supernatants were passed through a 0.22 µm filter (Millipore) and transferred into sterile polyallomer tubes (Beckman) and centrifuged at 20,000 g for 120 min at 20° C. (Beckman Optima XL-100KU ultracentrifuge). LV pellet was dissolved in the appropriate volume of phosphate buffered saline (PBS) to allow 500× concentration. Concentrated vector stock was aliquoted and stored at -80° C. LV titer was determined by flow cytometry 4-5 days after LV transduction analysis or quantitative PCR, 10-14 days after LV transduction, as described (Milani, M., et al. (2017). *Embo Mol Med* 9, 1558-1573).

mRNA IVT

[0803] GFP, ITGA4, CXCR4, CD47 and KIT DNA coding RNA were synthesized (GeneArt, Thermo Fisher) using *Homo Sapiens* codon-optimized algorithm. A complementary CXCR4 sequence was produced with reduced uridine content (dU). Coding sequences were subcloned in 'pVax' plasmids under the control of the following 5' aptamer sequence: CapAG—eIF4G aptamer (GACTCACTATTGTTTTTCGCGCCAGTTGCAAAAAGTGTCG)—Kozak sequence (CCACC)—start codon (ATG). Downstream the codon-optimized sequence follows a woodchuck hepatitis virus posttranscriptional regulatory element and a 120-bp polyA sequence.

[0804] For mRNA IVT, pVAX plasmids were linearized with SpeI (New England Biolabs) restriction enzyme and purified by phenol-chloroform extraction. mRNA was in vitro transcribed using the commercial 5xMEGAscript T7 kit (Thermo Fisher) and capped with 5 mM of CleanCapAG (Trilink). Different modified nucleotides were used: 5-Methoxyuridine-5'-Triphosphate (mU), Pseudouridine-5'-Triphosphate (pU), 5-Methylcytidine-5'-Triphosphate (mC; Trilink) at a concentration of 7.5 mM. mRNA was purified using RNeasy Plus Mini Kit (Qiagen) followed by high-performance liquid chromatography purification (ADS BIOTEC WAVE System) and Amicon Ultra-15 (30 K) tube (Millipore) concentration. mRNA productions were aliquoted and stored at -80° C. All RNA samples were analyzed by denaturing agarose gel electrophoresis to assess the quality and integrity.

Transduction

[0805] 10⁶ CD34⁺ cells/ml were stimulated with 10 µM PGE2 20 hours post-thawing. After 2 hours of pre-stimulation, cells were infected for 14 hours with LV-GFP at multiplicity of infection (MOI) 100. When necessary, cells were electroporated 14 hours post-transduction.

Electroporation

[0806] Cells were electroporated with 5 µg of encoding mRNA, two days post-thawing.

[0807] Transfections were performed using the 4D-Nucleofector™ System (Lonza) and following manufacturer's instructions primary cells (P3 Primary Cell 4D-Nucleofector X Kit, program EO-100; Lonza). From 6 h to day 10 after electroporation, target protein expression within HSPC subpopulations was evaluated by flow cytometry.

Gene Editing of Human HSPCs and Analyses

[0808] For AAV6-based gene editing, 1×10⁶ CD34⁺ cells (mobilized with G-CSF) after 3 days of culture in the medium described above were washed with ten volumes of DPBS and electroporated using P3 Primary Cell 4D-Nucleofector X Kit and program EO-100 (Lonza). Cells were electroporated with RNPs at a final concentration of 2.5 µM together with 0.1 nmol of Alt-R Cas9 Electroporation Enhancer (Integrated DNA Technologies), according to the manufacturer's instructions. AAV6 transduction was performed at a dose of 1×10⁴ vg per cell 15 min after electroporation. Additional mRNAs were added in the gene editing mixture as follows: (i) 3.5 µg GSE56/Ad5-E4orf6/7 (Fusion protein with P2A self-cleaving peptide) mRNA, (ii) 3.5 µg GSE56/Ad5-E4orf6/7 mRNA and 3.5 µg GFP mRNA or CXCR4 mRNA. Three and fifteen days after the editing procedure, cells were harvested to measure the percentage of cells expressing the GFP marker by flow cytometry and to extract gDNA for molecular analyses, as described (Ferrari, S., et al. (2021). *Nat Protoc* 16, 2991-3025).

In Vitro Migration Assay

[0809] Migration was performed using transwells permeable supports (Costar, 5 µm polycarbonate membrane). Briefly, 2×10⁵ mPB CD34⁺ previously electroporated with target mRNA, were seeded in the upper chamber, in StemSpan medium with cytokines. The lower chamber was filled with 600 µl of StemSpan medium with cytokines, supple-

mented with recombinant CXCL12 (PeproTech, 125 ng/ml). After 3 hours, migrating cells were recovered from the lower chamber and quantitatively evaluated on the BD Accuri™ 06 flow cytometer. For the migration inhibition experiment, Mozobil/AMD3100 and AMD3465 were added at 200 μM.

Flow Cytometry

[0810] Immunophenotypic analyses were performed on fluorescence activated cell sorting FACS Canto II (BD Pharmingen) according to manufacturers' instructions, equipped with DIVA Software and analyzed with the FSC express software (v. 6, 7, De Novo Software). 5×10⁴-2×10⁵ cells (from culture or mouse samples) were harvested, washed with PBS or MACS buffer (PBS pH 7.2, 0.5% BSA, 2 mM EDTA), treated with fragment crystallizable (Fc) Receptor-Block (Miltenyi Biotec), when antibody stained, and then re-suspended in the buffer used for washing. Staining was performed in MACS buffer, incubating cells for 15 minutes at 4° C. in dark with a mix of antibodies listed below, in a final volume of 100 μL. Sphero Rainbow Calibration Particles (Spherotech) beads were used to calibrate the instrument detectors, for consistent MFI measurement, for analysis performed at different times. Single stained and Fluorescence Minus One (FMO)-stained cells were used as controls.

[0811] LIVE/DEAD Fixable Dead Cell Stain Kit (Thermo Fisher) or 7-aminoactinomycin (Sigma-Aldrich) was included in the sample preparation for flow cytometry according to the manufacturer's instructions to exclude dead cells from the analysis. Apoptosis analysis was performed on CD34⁺ cells one day after electroporation using Annexin V (Biolegend) and Apoptosis Detection kit with 7-Aminoactinomycin D (7AAD, BD Pharmingen) according to the manufacturers' instructions. Percentages of live (7AAD⁻, AnnexinV⁻), early apoptotic (7AAD⁻, AnnexinV⁺) and late apoptotic (7AAD⁺, AnnexinV⁺) cells are reported.

[0812] For intracellular staining, surface antigens were stained prior to fixation and permeabilization steps, performed using the BD Cytofix/Cytoperm fixation/permeabilization Kit, according to the manufacturer's instructions.

[0813] Blood samples were also analysed with the hemocytometer Sysmex KX-21N (Block scientific, Sysmex corporation) to quantify absolute numbers.

Cd34⁺ HSPC Xenotransplantation Experiments in NSG and NSGW41 Mice

[0814] For transplantation into sublethally irradiated (150-180 cGy) NSG mice, 3×10⁵ cord blood CD34⁺ cells, diluted in 200 μL of PBS, were injected intravenously 24 hours after electroporation (performed 48 hours post-thawing).

[0815] For transplantation into NOD-B6-SCID Il2rγ^{-/-} Kit(W41/W41) mice, 3×10⁵ G-CSF mPB CD34⁺ cells, diluted in 200 μL of PBS, were injected intravenously 48-72 hours post-thawing. Once the human chimerism reached 10%, humanized NSGW41 mice were mobilized and transplanted with 1-3×10⁵ G-CSF mPB CD34⁺ cells, transduced (for stable overexpression of a fluorescent marker) the first day post-thawing and/or electroporated on the third day post-thawing, and transplanted on the fourth day. Mice were randomly distributed to each experimental group.

FIG. 3		
Gene replacement	1 st transplant	2 nd transplant
# G-CSF mPB CD34 (Counted at day 1)	1 × 10 ⁵	1 × 10 ⁵ (Transplanted at day 3)

FIG. 4		
Gene replacement + Electroporation	1 st transplant	2 nd transplant
# G-CSF mPB CD34 (Counted at day 1)	1 × 10 ⁵	2 × 10 ⁵ (Transplanted at day 3)

FIG. 5		
Gene correction	1 st transplant	2 nd transplant
# G-CSF mPB CD34 (Counted at day 1)	1 × 10 ⁵	3 × 10 ⁵ (Transplanted at day 4)

[0816] Human CD45⁺ cell engraftment, cell lineages and/or GFP⁺ cells were monitored by serial collection of blood from the retro-orbital vein and, at the end of the experiment (>12 weeks after transplantation), BM, thymus and spleen were harvested and analysed by flow cytometry for end-point analyses.

[0817] BM was flushed with PBS 2% BSA and 50 μL were stained for surface markers. The remaining cells were mouse cell-depleted and used for additional surface- or intracellular human antigen staining. For mouse cell depletion, BM cells flushed from the femurs and tibia of mice were processed with the Mouse Cell depletion Kit (Miltenyi Biotec) according to the manufacturer's instructions. Thymus was smashed and resuspended in PBS 2% BSA, and spleen was smashed, lysate with ACK Lysing Buffer (ThermoFisher) and resuspended in PBS 2% BSA. After processing, all samples were stained for surface marker and analyzed by flow cytometry. In some experiments, secondary transplantations were performed upon intravenous injection of 10⁶ human CD34⁺ harvested and purified (CD34 MicroBead Kit—following manufacturer instruction) from the BM of primary engrafted NSGW41 mice to NSG mice (16 weeks).

Mobilization In Vivo

[0818] NSGW41 mice were injected i.v. with CD34⁺ cells as previously described above. After stable engraftment (10 weeks after injection), mice were treated for mobilization. G-CSF (Lenograstim, 250 μg/kg/day) was delivered for 7 days through osmotic pumps positioned subcutaneously (s.c.) (Micro-osmotic pump 1007D, Alzet). At days 6 and 7 after pumps implantation, mice received i.p. injections of AMD3100 (Mozobil, 5 mg/kg/day) and BIO5192 (R&D System, 1 mg/kg/day). 6 hours after last i.p. injections, mice were transplanted i.v. with mobilized-derived CD34⁺ cells, from the same donor, transduced with LV-GFP vector for stable overexpression and electroporated with mRNA for transient overexpression of the indicated gene products.

[0819] Different protocols were tested in Cd40lg^{-/-} mice: (i) s.c. pump delivering 250 μg/kg/day of G-CSF for 7 days (G7); (ii) s.c. pump delivering 250 μg/kg/day of G-CSF for 7 days, with i.p. injections of AMD3100 (5 mg/kg/day) on day 6 and 7 (G7A); (iii) s.c. pump delivering 250 μg/kg/day

of G-CSF for 7 days, with i.p. injections of AMD3100 (5 mg/kg/day) and BIO5192 (1 mg/kg/day) on day 6 and 7 (G7AB); (iv) s.c. pump delivering 125 µg/kg/day of G-CSF for 7 days, with i.p. injections of AMD3100 (5 mg/kg/day) and BIO5192 (1 mg/kg/day) on day 6 and 7 (G7AB-H); (v) G-CSF delivered by i.p. injections (125 µg/kg) every 12 hours for four days, with AMD3100 s.c. injections (5 mg/kg) 14 hours after the last dose of G-CSF (G5A); (vi) G-CSF delivered by i.p. injections (125 µg/kg) every 12 hours for four days, with AMD3100 (5 mg/kg) and BIO5192 (1 mg/kg) s.c. injections 14 hours after the last dose of G-CSF (G5AB); (vii) s.c. pump delivering 250 µg/kg/day of G-CSF for 3 days, with i.p. injections of AMD3100 (5 mg/kg/day) and BIO5192 (1 mg/kg/day) on day 6 and 7 (G3AB-H); and (ix) AMD3100 (5 mg/kg/day) and BIO5192 (1 mg/kg/day) i.p. injected for three days.

[0820] Bone marrow vacancy and estimated chimerism were calculated based on the following formulas in Cd40Ig^{-/-} mice (summarized in table below):

[0821] To determine the total number of SLAM HSC per mouse at steady state (FIG. 2G, left panel), lower limbs (which account for 20% of the total BM) were collected in a defined volume and counted, paralleled with their characterization through FACS. We found 2500 SLAM HSC/lower limbs, therefore reaching a total of 12,500 SLAM HSC/mouse (2500*100/20). This number is in accordance with other published papers (Chen, J., et al. (2008). Experimental hematology, 36(10), 1236-1243; Karpova, D., et al. (2017). Blood, 129(21), 2939-2949; and Singh, P., et al. (2020). Stem cells (Dayton, Ohio), 38(7), 849-859).

[0822] To determine the total number of SLAM HSC that egressed from the BM post-G7AB mobilization, we examined the BM of mobilized mice. 1100 SLAM HSC were recovered in the lower limbs, reaching a total of 5500 SLAM HSC in the BM of mobilized mice. Therefore, to determine the number of SLAM HSC egressed, the number of SLAM HSC present post-mobilization was subtracted from the total number of SLAM HSC present in the steady state mouse, leading to an assessment of 7000 SLAM HSC egressing from the BM (12500-5500).

[0823] The mobilized SLAM HSC/mL was calculated based on the bleeding performed at the peak of mobilization in mobilized mice (FIG. 2G, right panel). The blood was analyzed through hematocytometer (WBC/mL) and FACS staining (% subpopulation). Based on the WBC and the percentage of each subpopulation, the mobilized SLAM HSC/mL was estimated. To calculate the total number of mobilized SLAM HSC, the concentration of mobilized SLAM HSC/mL was multiplied by the total blood volume estimated to 1.5 mL. Thereby, counts of SLAM HSC in the circulation of mobilized mice (FIG. 2G, right panel) were valued to 3500 SLAM HSC/mL, leading to an estimation of 5250 total SLAM HSC total in the circulation (2500*1.5), corresponding to 75% of the 7000 SLAM HSC egressed from the BM.

FIG. 2G		Steady state mice (Sham)	Mobilized mice (G7AB)
Left panel	# SLAM HSC in lower limbs	2500	1100
	# SLAM HSC total BM (Lower limbs = 20% total BM)	12500	5500
	#SLAM HSC egressed (# SLAM HSC total BM Sham - # SLAM HSC total BM mobilized)	12500 - 5500 = 7000	
	# SLAM HSC circulation (Total blood volume = 1.5 mL)	28*1.5 = 43	3500*1.5 = 5250
% SLAM HSC in circulation to SLAM HSC egressed from the BM		5250*100/7000 = 75%	

Concerning the transplanted Lin⁻ BM Cells:

[0824] 2×10⁶ Lin⁻ BM cells were used/transplantation. Upon purification of Lin⁻ cells from the BM, we characterized the Lin⁻ population using FACS and determined the percentage of LSK (average 9% Lin⁻; 9×10⁴ LSK/million of Lin⁻) and SLAM HSC (average 2%; 2000 SLAM HSC/million of Lin⁻) subpopulation. We next calculated the transplanted number of LSK and SLAM HSC from 2×10⁶ Lin⁻ cells, corresponding to 4000 SLAM HSC total.

[0825] The ratio recipient to donor was determined by dividing the mobilized recipient SLAM HSC by the transplanted SLAM HSC. As 2×10⁶ Lin⁻ were transplanted each time, except for the dose response experiment (FIG. 7M), the SLAM HSC transplanted always correspond to 4000.

$$BM \text{ vacancy (\%)} = \frac{\text{Total mobilized SLAM HSC} * 100}{\text{Total SLAM HSC in the BM}}$$

$$\text{Estimated chimerism (\%)} = \frac{BM \text{ vacancy}}{\left(\frac{\text{total SLAM HSC mobilized}}{\text{total SLAM HSC infused}} \right) + 1}$$

[0826] Humanized bone marrow vacancy and estimated chimerism were calculated based on the following formulas:

$$BM \text{ vacancy (\%)} = \frac{\text{Total mobilized CD34} * 100}{\text{Total CD34 in the BM}}$$

$$\text{Estimated chimerism (\%)} = \frac{BM \text{ vacancy}}{\left(\frac{\text{total CD34 mobilized}}{\text{total CD34 infused}} \right) + 1}$$

Molecular Analysis

[0827] For HDR digital droplet PCR (ddPCR) analysis, 5-50 ng of gDNA were analyzed using the QX200 Droplet Digital PCR System (Bio-Rad) according to the manufacturer's instructions. HDR ddPCR primers and probes were designed on the junction between the vector sequence and the targeted locus. Human TTC5 (Bio-Rad) was used for normalization. DNA was extracted using Qiaamp DNA micro kit (Qiagen) or Qiaamp DNA mini kit according to starting number of cells (as suggested by manufacturers). DNA was subsequently quantified and checked for purity. Vector copies per diploid genome (vector copy number, VCN) were

quantified by ddPCR starting from 5-50 ng of template gDNA using the following primers (HIV sense: 5'-TACTGACGCTCTCGCACC-3'; HIV antisense: 5'-TCTCGACGCAGGACTCG-3') and probe (FAM-ATCTCTCTCTCTAGCCTC-MGBNFQ) against the primer binding site region of LVs. Endogenous DNA amount was quantified by a primer/probe set against the human telomerase gene (Telo sense: 5'-GGCACACGTGGCTTTTCG-3'; Telo antisense: 5'-GGTGAACCTCGTAAGTTTATGCAA-3'; Telo probe: VIC 5'-TCAGGACGTCGAGTGGACACGGTG-3' TAMRA). Copies per genome were calculated by the formula=(ng LV/ng endogenous DNA)×(no of LV integrations in the standard curve). All reactions were carried out in duplicate. Each ddPCR run carries an internal control in the form of a CEMA301 cell line stably carrying a single vector integrant previously validated by Southern blot analysis.

[0828] For gene expression analyses, total RNA was extracted using RNeasy Plus Micro Kit (QIAGEN), according to the manufacturer's instructions and DNase treatment was performed using RNase-free DNase Set (QIAGEN). Complementary DNA was synthesized with SuperScript VILO IV cDNA Synthesis Kit (Thermo Fisher) with EzDNase treatment. cDNA was then used for quantitative PCR (qPCR) in a Vii7 Real-time PCR thermal cycler using TaqMan Gene Expression Assays (Applied Biosystems) mapping to human IRF7, OAS1, ISG15 and RIG-1 genes. Data were analyzed with QuantStudio Real-Time PCR software v.1.1 (Applied Biosystem). Relative expression of each target gene was first normalized to HPRT and then represented as fold changes (2- $\Delta\Delta C_t$) relative to the untreated cells.

Statistical Analysis

[0829] Here, the *n* indicates the number of biologically independent samples, animals or experiments. For some experiments, different HSPC donors were pooled. Data were summarized as mean±SEM. Inferential techniques were carried out whenever they were necessary for the interpretation of the data, otherwise descriptive statistics are reported. The Mann-Whitney test was performed to compare two independent groups, while in presence of more than two independent groups the Kruskal-Wallis test followed by post hoc analysis using Dunn's test was used. In presence of dependent observations and longitudinal comparisons the mixed-effects model (REML) were performed, followed by post hoc analysis with Sidak's test (when groups=2) or Tukey's test (when groups >2) and/or by post hoc analysis with Dunnett's test (within group). In all the analyses, P-values less than 0.05 were considered significant (**P*<0.05, ***P*<0.01, ****P*<0.001, *****P*<0.0001. "ns" means non-significance). All statistical analyses were performed using R 3.5.0 (<http://www.R-project.org/>) or GraphPad Prism v8.

Example 2

Results

AMD3100-Resistant CXCR4 Variant Increases Exchange Efficiency In Vivo

[0830] To investigate the potential of CXCR4 variants resistant to the AMD3100 antagonist used for HSPC mobilization, we employed the same mRNA-based transient overexpression approach described before to express these

variants in human mobilized peripheral blood CD34+ cells. Our results showed that transplantation of HSPCs overexpressing the drug-resistant CXCR4 variant into hematopoietic mice resulted in enhanced exchange with the mobilized recipient cells, providing an advantage compared to cells overexpressing wild-type CXCR4, in particular when transplanting cells at the time of AMD3100 and BIO5192 injection, as shown in FIG. 12*b*. These findings indicate that the use of CXCR4 variants resistant to AMD3100 can further increase the advantage of donor cells.

[0831] In addition to their enhanced resistance to the AMD3100, we also evaluated the effect of CXCR4 variants on mobilization efficiency using the AMD3100 analogue AMD3465. Our results showed that the mobilization efficiency was not affected by the use of AMD3465 compared to AMD3100 in the standard protocol with G-CSF, and BIO5192 (FIG. 12*c*). Furthermore, we found that the exchange efficiency remained unchanged regardless of the use of AMD3100 or AMD3465 when transplanting donor cells at the peak of mobilization (FIG. 12*d*).

[0832] Altogether, these findings indicate that the use of CXCR4 variants resistant to AMD3100 does not compromise the efficiency of mobilization and exchange, which is an important factor for the clinical translation of this strategy. Our strategy leverages on HSPC mobilization and transient overexpression of a drug-resistant CXCR4, which provides a broader and safer clinical application of HSPC gene transfer and gene editing. This is particularly promising as may minimize the toxicity associated with current conditioning procedures.

Materials and Methods

Mobilization-Based Transplant

[0833] When performing the mobilization experiment we used the protocol previously described. In the experiments described in FIG. 12*b*, HSPC transplant was performed on the last day of treatment, right after AMD3100 and BIO5192 injections.

EMBODIMENTS

[0834] Various preferred features and embodiments of the present invention will now be described with reference to the following numbered paragraphs (paras).

[0835] 1. A population of haematopoietic stem and/or progenitor cell (HSPCs) for use in a method of therapy, the method comprising the steps of:

[0836] (a) administering one or more HSPC mobiliser to a subject to mobilise endogenous HSPCs from the subject's bone marrow; and

[0837] (b) administering the population of HSPCs to the subject.

[0838] 2. A method for haematopoietic stem and/or progenitor cell (HSPC) transplantation in a subject in need thereof, comprising the steps:

[0839] (a) administering one or more HSPC mobiliser to the subject to mobilise the subject's endogenous HSPCs; and

[0840] (b) administering a population of HSPCs to the subject.

[0841] 3. The population of HSPCs for use according to para 1, or the method according to para 2, wherein the population of HSPCs is administered at or after the peak of

mobilisation, optionally wherein the population of HSPCs is administered at the peak of mobilisation.

[0842] 4. The population of HSPCs for use according to para 1 or 3, or the method according to para 2 or 3, wherein the population of HSPCs is administered within about 9 hours, within about 6 hours, or within about 3 hours after step (a), optionally wherein the population of HSPCs is administered about 2-4 hours or about 3 hours after step (a).

[0843] 5. The population of HSPCs for use according to para 1 or 3, or the method according to para 2 or 3, wherein the population of HSPCs is administered concurrently with step (a).

[0844] 6. The population of HSPCs for use according to any of paras 1 or 3-5, or the method according to any of paras 2-5, wherein the one or more HPSC mobiliser is selected from a granulocyte colony-stimulating factor (G-CSF), a CXCR4 antagonist and a VLA-4 antagonist, or any combination thereof.

[0845] 7. The population of HSPCs for use according to any of paras 1 or 3-6, or the method according to any of paras 2-6, wherein:

[0846] (i) the subject is administered a G-CSF for at least about 5 days before the population of HSPCs is administered;

[0847] (ii) the subject is administered a CXCR4 antagonist for at least about 1 day before the population of HSPCs is administered; and/or

[0848] (iii) the subject is administered a VLA-4 antagonist for at least about 1 day before the population of HSPCs is administered.

[0849] 8. The population of HSPCs for use according to any of paras 1 or 3-7, or the method according to any of paras 2-7, wherein:

[0850] (i) the subject is administered a G-CSF for about 7 days before the population of HSPCs is administered;

[0851] (ii) the subject is administered a CXCR4 antagonist for about 2 days before the population of HSPCs is administered; and

[0852] (iii) optionally, the subject is administered a VLA-4 antagonist for about 2 days before the population of HSPCs is administered.

[0853] 9. The population of HSPCs for use according to any of paras 1 or 3-8, or the method according to any of paras 2-8, wherein the population of HSPCs are autologous HSPCs or allogenic HSPCs, preferably wherein the population of HSPCs are autologous HSPCs.

[0854] 10. The population of HSPCs for use according to any of paras 1 or 3-9, or the method according to any of paras 2-9, wherein the method further comprises a step of harvesting the mobilized endogenous HSPCs prior to administering the population of HSPCs.

[0855] 11. The population of HSPCs for use according to any of paras 1 or 3-10, or the method according to any of paras 2-10, wherein the population of HSPCs is cultured ex vivo prior to administration, optionally wherein the method further comprises a step of genetically engineering the population of HSPCs prior to administering the population of HSPCs, and/or wherein the population of HSPCs are genetically engineered to express a transgene, gene-edited, and/or gene-corrected.

[0856] 12. The population of HSPCs for use according to any of paras 1 or 3-11, or the method according to any of paras 2-11, wherein the population of HSPCs are genetically

engineered to express one or more engraftment enhancer, preferably wherein the one or more engraftment enhancer is expressed transiently.

[0857] 13. The population of HSPCs for use according to para 12, or the method according to para 12, wherein the one or more engraftment enhancer are each expressed from an RNA polynucleotide comprising a protein-coding sequence encoding an engraftment enhancer, optionally wherein the RNA is delivered to the population of HSPCs by electroporation or by lipid-mediated transfection.

[0858] 14. The population of HSPCs for use according to para 13, or the method according to para 13, wherein the protein-coding sequence is operably linked to a translation non-blocking eIF4G aptamer.

[0859] 15. The population of HSPCs for use according to para 13 or 14, or the method according to para 13 or 14, wherein the protein-coding sequence is operably linked to a woodchuck hepatitis virus post-transcriptional regulatory element (WPRE).

[0860] 16. The population of HSPCs for use according to any of paras 13-15, or the method according to any of paras 13-15, wherein the protein-coding sequence is operably linked to a polyA tail, wherein the polyA tail is at least about 100, at least about 110, at least about 120, at least about 130, at least about 140, or at least about 150 nucleotides in length.

[0861] 17. The population of HSPCs for use according to any of paras 13-16, or the method according to any of paras 13-16, wherein the RNA polynucleotide is 5' capped mRNA, wherein the 5' cap is m7G(5')ppp(5')(2'OMeA)pG.

[0862] 18. The population of HSPCs for use according to any of paras 13-17, or the method according to any of paras 13-17, wherein the RNA polynucleotide comprises modified uridine, preferably pseudouridine.

[0863] 19. The population of HSPCs for use according to any of paras 12-18, or the method according to any of paras 12-18, wherein the one or more engraftment enhancer is selected from C-X-C chemokine receptor type 4 (CXCR4) or a fragment or variant thereof, CD47 or a fragment or variant thereof, integrin alpha-4 (ITGA4) or a fragment or variant thereof, and tyrosine-protein kinase KIT (KIT) or a fragment or variant thereof, or any combination thereof.

[0864] 20. The population of HSPCs for use according to any of paras 12-19, or the method according to any of paras 12-19, wherein the one or more engraftment enhancer comprises two or more, three or more, or four or more engraftment enhancers selected from: CXCR4 or a fragment or variant thereof, CD47 or a fragment or variant thereof, ITGA4 or a fragment or variant thereof, and KIT or a fragment or variant thereof.

[0865] 21. The population of HSPCs for use according to any of paras 1 or 2-20, or the method according to any of paras 2-20, wherein the population of HSPCs are genetically engineered to transiently express CXCR4 or a fragment or variant thereof.

[0866] 22. The population of HSPCs for use according to para 21, or the method according to para 21, wherein the CXCR4 or a fragment or variant thereof comprises or consists of an amino acid sequence having at least 70% identity to any of SEQ ID NOs: 1-9, preferably wherein the CXCR4 or a fragment or variant thereof comprises or consists of the amino acid sequence of SEQ ID NO: 2.

[0867] 23. The population of HSPCs for use according to para 21 or 22, or the method according to para 21 or 22, wherein the CXCR4 or a fragment or variant thereof com-

prises or consists of the amino acid sequence of any of SEQ ID NOs: 3-9, preferably wherein the CXCR4 or a fragment or variant thereof comprises or consists of the amino acid sequence of any of SEQ ID NOs: 6-9.

[0868] 24. The population of HSPCs for use according to any of paras 21-23, or the method according to any of paras 21-23, wherein the CXCR4 variant has increased resistance to a CXCR4 antagonist and/or has maintained or increased response to SDF-1.

[0869] 25. The population of HSPCs for use according to any of paras 1 or 3-24, or the method according to any of paras 2-24, wherein the population of HSPCs are genetically engineered to transiently express CD47 or a fragment or variant thereof.

[0870] 26. The population of HSPCs for use according to para 25, or the method according to para 25, wherein the CD47 or a fragment or variant thereof comprises or consists of an amino acid sequence having at least 70% identity to any of SEQ ID NOs: 23-26.

[0871] 27. The population of HSPCs for use according to any of paras 1 or 3-26, or the method according to any of paras 2-26, wherein the population of HSPCs are genetically engineered to transiently express ITGA4 or a fragment or variant thereof.

[0872] 28. The population of HSPCs for use according to para 27, or the method according to para 27, wherein the ITGA4 or a fragment or variant thereof comprises or consists of an amino acid sequence having at least 70% identity to SEQ ID NO: 29.

[0873] 29. The population of HSPCs for use according to para 27 or 28, or the method according to para 27 or 28, wherein the ITGA4 variant has increased resistance to a VLA-4 antagonist

[0874] 30. The population of HSPCs for use according to any of paras 1 or 3-29, or the method according to any of paras 2-29, wherein the population of HSPCs are genetically engineered to transiently express KIT or a fragment or variant thereof.

[0875] 31. The population of HSPCs for use according to para 30, or the method according to para 30, wherein the KIT or a fragment or variant thereof comprises or consists of an amino acid sequence having at least 70% identity to SEQ ID NO: 31.

[0876] 32. The population of HSPCs for use according to para 30 or 31, or the method according to para 30 or 31, wherein the KIT variant has increased resistance to a KIT-directed antibody or immunotoxin and/or has maintained or increased response to SCF.

[0877] 33. The population of HSPCs for use according to any of paras 1 or 3-32, or the method according to any of paras 2-32, wherein the subject does not undergo chemotherapy or radiotherapy conditioning prior to administration of the HSPCs.

[0878] 34. The population of HSPCs for use according to any of paras 1 or 3-33, or the method according to any of paras 2-33, wherein the subject has a primary immunodeficiency, a lysosomal storage disorder, a haemoglobinopathy, or cancer.

[0879] 35. The population of HSPCs for use according to any of paras 1 or 3-34, or the method according to any of paras 2-34, wherein the subject has a primary immunodeficiency, such as human primary combined immunodeficiency Hyper IgM Syndrome 1 (HIGM-1).

[0880] 36. The population of HSPCs for use according to any of paras 1 or 3-35, or the method according to any of paras 2-35, wherein the chimerism level of the population of HSPCs in the subject's bone marrow reaches a level of at least 10%, at least 15%, at least 20%, at least 25%, at least 30%, at least 35%, or at least 40%.

[0881] 37. The population of HSPCs for use according to para 36, or the method according to para 32, wherein the chimerism level of the population of HSPCs in the subject's bone marrow is stable for at least 24 weeks.

[0882] 38. The population of HSPCs for use according to any of paras 1 or 3-37, or the method according to any of paras 2-37, wherein steps (a) and (b) are repeated one or more times, two or more times, or three or more times.

[0883] 39. Use of a C-X-C chemokine receptor type 4 (CXCR4) variant, integrin alpha-4 (ITGA4), and/or tyrosine-protein kinase KIT (KIT), for increasing engraftment by haematopoietic stem and/or progenitor cells (HSPCs), wherein the CXCR4 variant comprises one or more amino acid substitution selected from: V160L, A175F, Q200A, D262N, and H281A.

[0884] 40. The use of para 39, wherein the HSPCs are genetically engineered to express the CXCR4 variant, ITGA4, and/or KIT, preferably wherein the HSPCs are genetically engineered to transiently express the CXCR4 variant, ITGA4, and/or KIT.

[0885] 41. The use of para 39 or 40, wherein the HSPCs are transduced or transfected with one or more vectors encoding the CXCR4 variant, ITGA4, and/or KIT, preferably wherein the one or more vectors are RNA vectors.

[0886] 42. The use of any of paras 39-41, wherein the HSPCs are genetically engineered to express two or more, three or more, or four or more of: the CXCR4 variant, ITGA4, KIT, CXCR4, and CD47.

[0887] 43. A method for increasing engraftment by haematopoietic stem and/or progenitor cells (HSPCs), wherein the method comprises the step of genetically engineering the HSPCs to express a CXCR4 variant, ITGA4, and/or KIT, wherein the CXCR4 variant comprises one or more amino acid substitution selected from: V160L, A175F, Q200A, D262N, and H281A.

[0888] 44. The use of any of paras 39-42 or the method of para 43, wherein the CXCR4 variant, ITGA4, and/or KIT are expressed transiently or stably by the HSPCs, preferably transiently.

[0889] 45. The use of any of paras 39-42 or 44, or the method of para 43 or 44, wherein the CXCR4 variant comprises one or more amino acid substitution selected from: A175F, Q200A, D262N, and H281A.

[0890] 46. The use of any of paras 39-42 or 44-45, or the method of any of paras 43-45, wherein the CXCR4 variant comprises or consists of the amino acid sequence of any of SEQ ID NOs: 3-9, preferably wherein the CXCR4 variant comprises or consists of the amino acid sequence of any of SEQ ID NOs: 6-9.

[0891] 47. A population of genetically engineered haematopoietic stem and/or progenitor cells (HSPCs) obtainable by the method of any of paras 43 to 46.

[0892] 48. A population of genetically engineered haematopoietic stem and/or progenitor cells (HSPCs), wherein the HSPCs are genetically engineered to express a CXCR4 variant, ITGA4, and/or KIT, preferably wherein the HSPCs are genetically engineered to transiently express a CXCR4 variant, ITGA4, and/or KIT, wherein the CXCR4 variant

comprises one or more amino acid substitution selected from: V160L, A175F, Q200A, D262N, and H281A, preferably wherein the CXCR4 variant comprises one or more amino acid substitution selected from: A175F, Q200A, D262N, and H281A.

[0893] 49. The population of genetically engineered HSPCs according to para 48, wherein the HSPCs are genetically engineered to express two or more, three or more, or four or more of: the CXCR4 variant, ITGA4, KIT, CXCR4, and CD47, preferably wherein the HSPCs are genetically engineered to transiently express two or more, three or more, or four or more of: the CXCR4 variant, ITGA4, KIT, CXCR4, and CD47.

[0894] 50. A pharmaceutical composition comprising the population of genetically engineered haematopoietic stem and/or progenitor cells (HSPCs) of any of paras 47-49 and a pharmaceutically acceptable carrier, diluent or excipient.

[0895] 51. A population of genetically engineered haematopoietic stem and/or progenitor cells (HSPCs) according to any of paras 47-50 for use in therapy.

[0896] 52. A population of genetically engineered haematopoietic stem and/or progenitor cells (HSPCs) according to any of paras 47-50 for use in the treatment or prevention of cancer, an immune disorder, a lysosomal storage disorder, a bacterial or viral infection, a genetic disease, or a hemoglobinopathy.

[0897] 53. A method for haematopoietic stem and/or progenitor cell (HSPC) transplantation, comprising the steps:

[0898] (a) providing a population of HSPCs which are genetically engineered to express a CXCR4 variant, ITGA4, and/or KIT, wherein the CXCR4 variant comprises one or more amino acid substitution selected from: V160L, A175F, Q200A, D262N, and H281A, preferably wherein the CXCR4 variant comprises one or more amino acid substitution selected from: A175F, Q200A, D262N, and H281A; and

[0899] (b) administering the HSPCs to a subject.

[0900] 54. A method of treating or preventing cancer, an immune disorder, a lysosomal storage disorder, a bacterial or viral infection, a genetic disease, or a hemoglobinopathy, comprising the steps:

[0901] (a) providing a population of haematopoietic stem and/or progenitor cells (HSPCs) which are genetically engineered to express a CXCR4 variant, ITGA4, and/or KIT, wherein the CXCR4 variant comprises one or more amino acid substitution selected from: V160L, A175F, Q200A, D262N, and H281A, preferably wherein the CXCR4 variant comprises one or more amino acid substitution selected from: A175F, Q200A, D262N, and H281A; and

[0902] (b) administering the HSPCs to a subject.

[0903] 55. The population of genetically engineered HSPCs for use according to para 51 or 52, or the method of para 53 or 54, wherein the subject is subjected to a mild myeloablative, reduced intensity or non-myeloablative conditioning regimen before administration of the HSPCs.

[0904] 56. The population of genetically engineered HSPCs for use according to any of paras 51, 52 or 55, or the method of any of paras 53-55, wherein the subject:

[0905] (a) is subjected to a regimen for mobilisation of endogenous HSPCs; or

[0906] (b) is subjected to conditioning with one or more HSPC-specific immunotoxins.

[0907] 57. The population of genetically engineered HSPCs for use according to any one of paras 51, 52, 55 or 56, or the method of any of paras 53-56, wherein the subject is subjected to a regimen for mobilisation of endogenous HSPCs.

[0908] 58. The population of genetically engineered HSPCs for use according to any of paras 51, 52 or 55-57, or the method of any of paras 53-57, wherein the population of HSPCs is administered at or after the peak of mobilisation, optionally wherein the population of HSPCs is administered at the peak of mobilisation.

[0909] 59. The population of genetically engineered HSPCs for use according to any of paras 51, 52 or 55-58, or the method of any of paras 53-58, wherein the population of HSPCs is administered within about 9 hours, within about 6 hours, or within about 3 hours after the regimen for mobilisation of endogenous HSPCs is completed, optionally wherein the population of HSPCs is administered about 2-4 hours or about 3 hours after the regimen for mobilisation of endogenous HSPCs is completed.

[0910] 60. The population of genetically engineered HSPCs for use according to any of paras 51, 52 or 55-59, or the method of any of paras 53-59, wherein the population of HSPCs is administered concurrently with the regimen for mobilisation of endogenous HSPCs.

[0911] 61. The population of genetically engineered HSPCs for use according to any of paras 51, 52 or 55-60, or the method of any of paras 53-60, wherein the regimen for mobilisation of endogenous HSPCs comprises administering one or more HPSC mobiliser selected from a granulocyte colony-stimulating factor (G-CSF), a CXCR4 antagonist and a VLA-4 antagonist, or any combination thereof.

[0912] 62. The population of genetically engineered HSPCs for use according to any of paras 51, 52 or 55-61, or the method of any of paras 53-61, wherein the regimen for mobilisation of endogenous HSPCs comprises:

[0913] (i) administering a G-CSF for at least about 5 days;

[0914] (ii) administering a CXCR4 antagonist for at least about 1 day; and/or

[0915] (iii) administering a VLA-4 antagonist for at least about 1 day.

[0916] 63. The population of HSPCs for use according to any of paras 51, 52 or 55-62, or the method according to any of paras 53-62, wherein:

[0917] (i) administering a G-CSF for about 7 days;

[0918] (ii) administering a CXCR4 antagonist for about 2 days; and

[0919] (iii) administering a VLA-4 antagonist for about 2 days.

[0920] 64. The population of genetically engineered HSPCs for use according to any of paras 51, 52 or 55-63, or the method of any of paras 53-63, wherein the subject does not undergo chemotherapy or radiotherapy conditioning before administration of the HSPCs.

[0921] 65. The population of genetically engineered HSPCs for use according to any of paras 51, 52 or 55-64, or the method of any of paras 53-64, wherein the CXCR4 variant comprises or consists of the amino acid sequence of any of SEQ ID NOs: 3-9, preferably wherein the CXCR4 variant comprises or consists of the amino acid sequence of any of SEQ ID NOs: 6-9.

[0922] 66. An RNA polynucleotide comprising a protein-coding sequence.

[0923] 67. The RNA polynucleotide according to para 66, wherein the protein-coding sequence is operably linked to a Kozak sequence.

[0924] 68. The RNA polynucleotide according to para 66 or 67, wherein the protein-coding sequence is operably linked to a translation non-blocking eIF4F aptamer.

[0925] 69. The RNA polynucleotide according to para 68, wherein the translation non-blocking eIF4F aptamer is a translation non-blocking eIF4G aptamer.

[0926] 70. The RNA polynucleotide according to para 68 or 69, wherein the translation non-blocking eIF4F aptamer comprises or consists of a nucleotide sequence having at least 90% identity to any of SEQ ID NOs: 33-36.

[0927] 71. The RNA polynucleotide according to any of paras 68-70, wherein the translation non-blocking eIF4F aptamer comprises or consists of a nucleotide sequence having at least 90% identity to SEQ ID NO: 34.

[0928] 72. The RNA polynucleotide according to any of paras 66-71, wherein the protein-coding sequence is operably linked to a woodchuck hepatitis virus post-transcriptional regulatory element (WPRE).

[0929] 73. The RNA polynucleotide according to para 72, wherein the WPRE comprises or consists of a nucleotide sequence having at least 70% identity to SEQ ID NO: 37.

[0930] 74. The RNA polynucleotide according to any of paras 66-73, wherein the protein-coding sequence is operably linked to a polyA tail, wherein the polyA tail is at least about 100, at least about 110, at least about 120, at least about 130, at least about 140, or at least about 150 nucleotides in length.

[0931] 75. The RNA polynucleotide according to any of paras 66-74, wherein the RNA polynucleotide is a 5' capped mRNA, wherein the 5' cap is m7G(5')ppp(5')(2'OMeA)pG.

[0932] 76. The RNA polynucleotide according to any of paras 66-75, wherein the RNA polynucleotide comprises modified uridine, preferably pseudouridine.

[0933] 77. The RNA polynucleotide according to any of paras 66-76, wherein the RNA polynucleotide comprises from 5' to 3': a m7G(5')ppp(5')(2'OMeA)pG cap; a translation non-blocking eIF4F aptamer; a Kozak sequence; a protein-coding sequence; a WPRE; and a polyA tail comprising at least about 100 nucleotides.

[0934] 78. The RNA polynucleotide according to any of paras 66-77, wherein the transgene is an engraftment enhancer.

[0935] 79. The RNA polynucleotide according to para 78, wherein the engraftment enhancer is selected from CXCR4 or a fragment or variant thereof, CD47 or a fragment or variant thereof, ITGA4 or a fragment or variant thereof, and KIT or a fragment or variant thereof.

[0936] 80. The RNA polynucleotide according to para 78 or 79, wherein the engraftment enhancer is CXCR4 or a fragment or variant thereof.

[0937] 81. The RNA polynucleotide according to para 80, wherein the CXCR4 or a fragment or variant thereof comprises or consists of an amino acid sequence having at least 70% identity to any of SEQ ID NOs: 1-9, preferably wherein the CXCR4 or a fragment or variant thereof comprises or consists of the amino acid sequence of any of SEQ ID NOs: 3-9, more preferably wherein the CXCR4 or a fragment or variant thereof comprises or consists of the amino acid sequence of any of SEQ ID NOs: 6-9.

[0938] 82. The RNA polynucleotide according to para 80 or 81, wherein the protein-coding sequence comprises or

consists of a nucleotide sequence having at least 70% identity to any of SEQ ID NOs: 10-22, preferably wherein the protein-coding sequence comprises or consists of the nucleotide sequence of any of SEQ ID NOs: 19-22.

[0939] 83. The RNA polynucleotide according to para 78 or 79, wherein the engraftment enhancer is CD47 or a fragment or variant thereof.

[0940] 84. The RNA polynucleotide according to para 83, wherein the CD47 or a fragment or variant thereof comprises or consists of an amino acid sequence having at least 70% identity to any of SEQ ID NOs: 23-26.

[0941] 85. The RNA polynucleotide according to para 83 or 84, wherein the protein-coding sequence comprises or consists of a nucleotide sequence having at least 70% identity to SEQ ID NO: 27 or 28.

[0942] 86. The RNA polynucleotide according to para 78 or 79, wherein the engraftment enhancer is ITGA4 or a fragment or variant thereof.

[0943] 87. The RNA polynucleotide according to para 86, wherein the ITGA4 or a fragment or variant thereof comprises or consists of an amino acid sequence having at least 70% identity to SEQ ID NO: 29.

[0944] 88. The RNA polynucleotide according to para 86 or 87, wherein the protein-coding sequence comprises or consists of a nucleotide sequence having at least 70% identity to SEQ ID NO: 30.

[0945] 89. The RNA polynucleotide according to para 78 or 79, wherein the engraftment enhancer is KIT or a fragment or variant thereof.

[0946] 90. The RNA polynucleotide according to para 89, wherein the KIT or a fragment or variant thereof comprises or consists of an amino acid sequence having at least 70% identity to SEQ ID NO: 31.

[0947] 91. The RNA polynucleotide according to para 89 or 90, wherein the protein-coding sequence comprises or consists of a nucleotide sequence having at least 70% identity to SEQ ID NO: 32.

[0948] 92. A DNA polynucleotide encoding the RNA polynucleotide according to any of paras 66-91.

[0949] 93. A vector comprising the DNA polynucleotide according to para 92.

[0950] 94. An isolated cell comprising the RNA polynucleotide according to any of paras 66-91, the DNA polynucleotide according to para 92, or the vector according to para 93.

[0951] 95. A method for the production of the RNA polynucleotide according to any of paras 66-91, comprising the step of in vitro transcribing the DNA polynucleotide according to para 92.

[0952] 96. The method according to para 95, wherein the method comprises transcribing the DNA with modified uridine, preferably pseudouridine.

[0953] 97. The method according to para 95 or 96, wherein the method comprises capping the RNA polynucleotide with m7G(5')ppp(5')(2'OMeA)pG.

[0954] 98. The method according to any of paras 95-97, wherein the method comprise purifying the RNA polynucleotide.

[0955] 99. A method for delivering the RNA polynucleotide according to any of paras 66-91, wherein the RNA polynucleotide is delivered to a population of HSPCs by electroporation or by lipid-mediated transfection.

[0956] 100. Use of the RNA polynucleotide according to any of paras 78-91 for increasing engraftment by haematopoietic stem and/or progenitor cells (HSPCs).

[0957] 101. A method for increasing engraftment by haematopoietic stem and/or progenitor cells (HSPCs), wherein the method comprises the step of transfecting the RNA polynucleotide according to any of paras 78-91 into the HSPCs.

[0958] 102. An isolated haematopoietic stem and/or progenitor cell (HSPC) comprising the RNA polynucleotide according to any of paras 78-91.

[0959] 103. A population of isolated haematopoietic stem and/or progenitor cells (HSPCs) according to para 102.

[0960] 104. A pharmaceutical composition comprising the isolated HSPC of para 102, or a population of HSPCs of para 103, and a pharmaceutically acceptable carrier, diluent or excipient.

[0961] 105. An isolated HSPC according to para 102, or a population of HSPCs according to para 103, for use in therapy.

[0962] 106. An isolated HSPC according to para 102, or a population of HSPCs according to para 103, for use in the treatment or prevention of cancer, an immune disorder, a lysosomal storage disorder, a bacterial or viral infection, a genetic disease, or a hemoglobinopathy.

[0963] 107. A method for haematopoietic stem and/or progenitor cell (HSPC) transplantation, comprising the steps:

[0964] (a) providing a population of HSPCs comprising the RNA polynucleotide according to any of paras 78-91; and

[0965] (b) administering the HSPCs to a subject.

[0966] 108. A method of treating or preventing cancer, an immune disorder, a lysosomal storage disorder, a bacterial or viral infection, a genetic disease, or a hemoglobinopathy, comprising the steps:

[0967] (a) providing a population of HSPCs comprising the RNA polynucleotide according to any of paras 78-91; and

[0968] (b) administering the HSPCs to a subject.

[0969] All publications mentioned in the above specification are herein incorporated by reference. Various modifications and variations of the disclosed methods and materials of the invention will be apparent to the skilled person without departing from the scope and spirit of the invention. Although the invention has been disclosed in connection with specific preferred embodiments, it should be understood that the invention as claimed should not be unduly limited to such specific embodiments. Indeed, various modifications of the disclosed modes for carrying out the invention, which are obvious to the skilled person are intended to be within the scope of the following claims.

SEQUENCE LISTING

Sequence total quantity: 62

SEQ ID NO: 1 moltype = AA length = 356
 FEATURE Location/Qualifiers
 REGION 1..356
 note = CXCR4 isoform II
 source 1..356
 mol_type = protein
 organism = synthetic construct

SEQUENCE: 1

```
MSIPLPLLQI YTSNNTYTEM GSGDYDSMKE PCFREANANF NKIFLPTIYS IIFLTGIVGN 60
GLVILVMGYQ KKLRSMTDKY RLHLSVADLL FVITLPPFAV DAVANWYFGN FLCKAVHVIY 120
TVNLYSSVLI LAFISLDRLY AIVHATNSQR PRKLLAEKVV YGVVWIPALL LTIPDFIFAN 180
VSEADDRYIC DRFPNDLWV VVFQFQHIMV GLILPGIVIL SCYCIISKL SHSKGHQKRK 240
ALKTTVILIL AFFACWLPYV IGISIDSPIL LEIIKQGECE ENTVHKWIST TEALAFFPHCC 300
LNPILYAFGL AKFKTSAQHA LTVSRGSSL KILSKGRGG HSSVSTESSES SSFPHSS 356
```

SEQ ID NO: 2 moltype = AA length = 352
 FEATURE Location/Qualifiers
 REGION 1..352
 note = CXCR4 isoform I
 source 1..352
 mol_type = protein
 organism = synthetic construct

SEQUENCE: 2

```
MEGSIYITSD NYTEEMGSGD YDSMKEPCFR EENANFNKIF LPTIYSIIFL TGIVGNGLVI 60
LVMGYQKKLR SMTDKYRLHL SVADLLFVIT LPPFAVDAVA NWYFGNFLCK AVHVIYTVNL 120
YSSVLILAFI SLDRYLAIHV ATNSQRPRKL LAEKVVYVGV WIPALLLTIP DFIFANVSEA 180
DDRYICDRFY PNDLWVVFQ FQHIMVGLIL PGIVILSCYC IISKLSHSH GHQKRKALKT 240
TVILILAFIA CWLPYYIGIS IDSFILLEII KQGECEFTV HKWISITEAL AFFHCCLNPI 300
LYAFLGAKFK TSAQHALTSV SRGSSLKILS KGRGGHSSV STESESSSFH SS 352
```

SEQ ID NO: 3 moltype = AA length = 337
 FEATURE Location/Qualifiers
 REGION 1..337
 note = CXCR4 Whim isoform II
 source 1..337
 mol_type = protein
 organism = synthetic construct

SEQUENCE: 3

```
MSIPLPLLQI YTSNNTYTEM GSGDYDSMKE PCFREANANF NKIFLPTIYS IIFLTGIVGN 60
GLVILVMGYQ KKLRSMTDKY RLHLSVADLL FVITLPPFAV DAVANWYFGN FLCKAVHVIY 120
```

-continued

TVNLYSSVLI	LAFISLDRL	AIVHATNSQR	PRKLLAEKV	YVGVWIPALL	LTIPDFIFAN	180
VSEADDRYIC	DRFYPNDLWV	VVFQFQHIMV	GLILPGIVIL	SCYCIISKL	SHSKGHQKRK	240
ALKTTVILIL	AFFACWLPYY	IGISIDSFIL	LEIIKQGCEF	ENTVHKWISI	TEALAFFHCC	300
LNPILYAFLG	AKFKTSAQHA	LTSVSRGSSL	KILSKGK			337

```

SEQ ID NO: 4      moltype = AA length = 333
FEATURE          Location/Qualifiers
REGION           1..333
                  note = CXCR4 Whim isoform I
source           1..333
                  mol_type = protein
                  organism = synthetic construct

```

```

SEQUENCE: 4
MEGISIYTSN NYTEEMSGD YDSMKEPCFR EENANFNKIF LPTIYSIIFL TGIVGNGLVI 60
LVMGYQKKLR SMTDKYRLHL SVADLLFVIT LPFWAVDAVA NWYFGNPLCK AVHVIYTVNL 120
YSSVLILAFI SLDRLAIVH ATNSQRPRKL LAEKVVYVGV WIPALLLTIP DFIFANVSEA 180
DDRYICDRFY PNDLWVVVFQ FQHIMVGLIL PGIVILSCYC IIISKLSHSHK GHQKRKALKT 240
TVILILAFIA CWLPYYIGIS IDSFILLEII KQGCEFENTV HKWISITEAL AFFHCLNPI 300
LYAFLGAKFK TSAQHALTSV SRGSSLKILS KGK 333

```

```

SEQ ID NO: 5      moltype = AA length = 352
FEATURE          Location/Qualifiers
REGION           1..352
                  note = CXCR4 V160L
source           1..352
                  mol_type = protein
                  organism = synthetic construct

```

```

SEQUENCE: 5
MEGISIYTSN NYTEEMSGD YDSMKEPCFR EENANFNKIF LPTIYSIIFL TGIVGNGLVI 60
LVMGYQKKLR SMTDKYRLHL SVADLLFVIT LPFWAVDAVA NWYFGNPLCK AVHVIYTVNL 120
YSSVLILAFI SLDRLAIVH ATNSQRPRKL LAEKVVYVGV WIPALLLTIP DFIFANVSEA 180
DDRYICDRFY PNDLWVVVFQ FQHIMVGLIL PGIVILSCYC IIISKLSHSHK GHQKRKALKT 240
TVILILAFIA CWLPYYIGIS IDSFILLEII KQGCEFENTV HKWISITEAL AFFHCLNPI 300
LYAFLGAKFK TSAQHALTSV SRGSSLKILS KGKRGHSSV STESESSSPH SS 352

```

```

SEQ ID NO: 6      moltype = AA length = 352
FEATURE          Location/Qualifiers
REGION           1..352
                  note = CXCR4 A175F
source           1..352
                  mol_type = protein
                  organism = synthetic construct

```

```

SEQUENCE: 6
MEGISIYTSN NYTEEMSGD YDSMKEPCFR EENANFNKIF LPTIYSIIFL TGIVGNGLVI 60
LVMGYQKKLR SMTDKYRLHL SVADLLFVIT LPFWAVDAVA NWYFGNPLCK AVHVIYTVNL 120
YSSVLILAFI SLDRLAIVH ATNSQRPRKL LAEKVVYVGV WIPALLLTIP DFIFANVSEA 180
DDRYICDRFY PNDLWVVVFQ FQHIMVGLIL PGIVILSCYC IIISKLSHSHK GHQKRKALKT 240
TVILILAFIA CWLPYYIGIS IDSFILLEII KQGCEFENTV HKWISITEAL AFFHCLNPI 300
LYAFLGAKFK TSAQHALTSV SRGSSLKILS KGKRGHSSV STESESSSPH SS 352

```

```

SEQ ID NO: 7      moltype = AA length = 352
FEATURE          Location/Qualifiers
REGION           1..352
                  note = CXCR4 Q200A
source           1..352
                  mol_type = protein
                  organism = synthetic construct

```

```

SEQUENCE: 7
MEGISIYTSN NYTEEMSGD YDSMKEPCFR EENANFNKIF LPTIYSIIFL TGIVGNGLVI 60
LVMGYQKKLR SMTDKYRLHL SVADLLFVIT LPFWAVDAVA NWYFGNPLCK AVHVIYTVNL 120
YSSVLILAFI SLDRLAIVH ATNSQRPRKL LAEKVVYVGV WIPALLLTIP DFIFANVSEA 180
DDRYICDRFY PNDLWVVVFA FQHIMVGLIL PGIVILSCYC IIISKLSHSHK GHQKRKALKT 240
TVILILAFIA CWLPYYIGIS IDSFILLEII KQGCEFENTV HKWISITEAL AFFHCLNPI 300
LYAFLGAKFK TSAQHALTSV SRGSSLKILS KGKRGHSSV STESESSSPH SS 352

```

```

SEQ ID NO: 8      moltype = AA length = 352
FEATURE          Location/Qualifiers
REGION           1..352
                  note = CXCR4 D262N
source           1..352
                  mol_type = protein
                  organism = synthetic construct

```

```

SEQUENCE: 8
MEGISIYTSN NYTEEMSGD YDSMKEPCFR EENANFNKIF LPTIYSIIFL TGIVGNGLVI 60
LVMGYQKKLR SMTDKYRLHL SVADLLFVIT LPFWAVDAVA NWYFGNPLCK AVHVIYTVNL 120
YSSVLILAFI SLDRLAIVH ATNSQRPRKL LAEKVVYVGV WIPALLLTIP DFIFANVSEA 180

```

-continued

DDRYICDRFY	PNDLWVVVFQ	FQHIMVGLIL	PGIVILSCYC	IIISKLSHSK	GHQKRKALKT	240
TVILILAFPA	CWLPPYYIGIS	INSFILLEII	KQGCEFENTV	HKWISITEAL	APFHCLNPI	300
LYAFLGAKFK	TSAQHALTSV	SRGSSLKILS	KGKRGHSSV	STESSESSFH	SS	352

SEQ ID NO: 9 moltype = AA length = 352
 FEATURE Location/Qualifiers
 REGION 1..352
 note = CXCR4 H281A
 source 1..352
 mol_type = protein
 organism = synthetic construct

SEQUENCE: 9		
MEGISIYTS	NYTEEMSGSD	YDSMKEPCFR EENANFNKIF LPTIYSIIFL TGIVGNGLVI 60
LVMGYQKKLR	SMTDKYRLHL	SVADLLFVIT LPFWAVDAVA NWYFGNPLCK AVHVIYTVNL 120
YSSVLILAFI	SLDRYLAIVH	ATNSQRPRKL LAEKVVYVGV WIPALLLTIP DFIFANVSEA 180
DDRYICDRFY	PNDLWVVVFQ	FQHIMVGLIL PGIVILSCYC IIISKLSHSK GHQKRKALKT 240
TVILILAFPA	CWLPPYYIGIS	IDSFILLEII KQGCEFENTV AKWISITEAL APFHCLNPI 300
LYAFLGAKFK	TSAQHALTSV	SRGSSLKILS KGKRGHSSV STESSESSFH SS 352

SEQ ID NO: 10 moltype = DNA length = 1068
 FEATURE Location/Qualifiers
 misc_feature 1..1068
 note = CXCR4 isoform II
 source 1..1068
 mol_type = other DNA
 organism = synthetic construct

SEQUENCE: 10		
atgtctattc	ctctgcccct	gctgcagatc tacaccagcg acaactacac cgaggaaatg 60
ggcagcggcg	actacgacag	catgaaggaa cccgtcttcc gggaagagaa cgccaacttc 120
aacaagatct	tcctgcccac	aatctacagc atcatcttcc tgaccggcat cgtgggcaac 180
ggactcgtga	tcctcgtgat	gggctaccag aaaaagctgc ggagcatgac cgacaagtac 240
cggctgcacc	tgagcgtggc	cgacctgctg ttcgtgatca cccctgcctt ctgggcccgtg 300
gacgccgtgg	ccaattggta	cttcggcaac ttcctgtgca aggcctgca cgtgatctac 360
acagtgaacc	tgtagacgag	cgtgctgata ctggccttca tcagcctgga cagatacctg 420
gccatcgtgc	acgccacca	cagccagcgg cctagaaagc tgctggccga gaaggtgggtg 480
tacgtggggc	tgtggattcc	cgccctgctg ctgaccatcc ccgacttcat ctgcgccaac 540
gtgtccgagg	ccgacgaccc	gtacatctgc gaccggttct accccaacga cctgtgggtg 600
gtggtgttcc	agttccagca	catcatgggt ggactgatcc tgccctggcat cgtgattctg 660
agctgctact	gcacatccat	cagcaagctg agccacagca agggccacca gaagcggaag 720
gccctgaaaa	ccaccgtgat	ctcgattctg gctttcttcg cctgctgggt gccctactac 780
atcggcatca	gcacgcagag	cttcactctg ctggaaatca tcaagcaggg ctgcgagttc 840
gagaacaccc	tgcaacaagt	gatcagcatt accgaggccc tggccttttt ccactgctgc 900
ctgaacccta	tcctgtacgc	cttctggggc gccaaagtta agactctgca ccagcacgcc 960
ctgaccagcg	tgtccagagg	aagcagcctg aagatcctga gcaagggcaa gagaggcggtg 1020
cacagctccg	tgtctacaga	gagcgagagc agcagcttcc acagcagc 1068

SEQ ID NO: 11 moltype = DNA length = 1068
 FEATURE Location/Qualifiers
 misc_feature 1..1068
 note = CXCR4 isoform II
 source 1..1068
 mol_type = other DNA
 organism = synthetic construct

SEQUENCE: 11		
atgtccattc	ctttgcctct	tttgcagata tacacttcag ataactacac cgaggaaatg 60
ggctcagggg	actatgactc	catgaaggaa cccgtgttcc gtgaagaaaa tgctaatttc 120
aataaaatct	tcctgcccac	catctactcc atcatcttct taactggcat tgtgggcaat 180
ggattgtgtc	tcctgtgtcc	gggttaccag aagaaactga gaagcatgac ggacaagtac 240
aggctgcacc	tgtagtggc	cgacctcttc tttgtcatca cgcttccctt ctgggcagtt 300
gatgccgtgg	caaaactggta	ctttgggaac ttcctatgca aggcagtcga tgctcatctac 360
acagtcaacc	tcacagcag	tgtctctatc ctggccttca tcagtctgga ccgctacctg 420
gccatcgtcc	acgccacca	cagtcagagg ccaaggaagc tgttggctga aaaggtgggtc 480
tatgttggcg	tcctggatccc	tgccctcctg ctgactatcc ccgacttcat ctttgccaac 540
gtcagtgagg	cagatgacag	atatatctgt gaccgcttct accccaatga cttgtgggtg 600
gttgtgttcc	agtttccagca	catcatgggt ggcccttacc tgccctggtat tgctactcctg 660
tcctgctatt	gcatttatcat	ctccaagctg tcacactcca agggccacca gaagcgcaag 720
gccctcaaga	ccacagtcac	cctcatcctg gctttcttcg cctgttgggt gccttactac 780
attgggatca	gcctcgactc	cttcactctc ctggaaatca tcaagcaagg gtgtgagttt 840
gagaacactg	tgcaacaagt	gatttccatc accgaggccc tagctttctt ccactgttgt 900
ctgaacccca	tcctctatgc	tttcttggga gccaaattta aaacctctgc ccagcacgca 960
ctcacctctg	tgagcagagg	gtccagcctc aagatcctct ccaagggaag gcgaggtgga 1020
cattcatctg	tttccactga	gtctgagttc tcaagttttc actccagc 1068

SEQ ID NO: 12 moltype = DNA length = 1056
 FEATURE Location/Qualifiers
 misc_feature 1..1056

-continued

```

source          note = CXCR4 isoform I
                1..1056
                mol_type = other DNA
                organism = synthetic construct

SEQUENCE: 12
atggaaggca tcagcatcta caccagcgac aactacaccg aggaaatggg cagcggcgac 60
tacgacagca tgaaggaacc ctgcttccgg gaagagaacg ccaacttcaa caagatcttc 120
ctgcccacaa tctacagcat catctttctg accggcatcg tgggcaacgg actcgtgatc 180
ctcgtgatgg gctaccagaa aaagctgcgg agcatgaccg acaagtaccg gctgcacctg 240
agcgtggccg acctgctgtt cgtgatcacc ctgctttctt gggccgtgga cgcctgggcc 300
aattgggtact tcggcaactt cctgtgcaag gccgtgcacg tgatctacac agtgaacctg 360
tacagcagcg tgctgatcct ggcttctcgc agcctggaca gatacctggc catcgtgcac 420
gccaccaaca gccagcggcc tagaaagctg ctggccgaga aggtgggtga cgtggggcgtg 480
tggattcccc cctgtctgct gacctcccc gacttcactt tcgccaacgt gtcgagggcc 540
gacgaccggt acatctgcga ccggttctac cccaacgacc tgtgggtggg ggtgttcacg 600
ttccagcaca tcatgggtggg actgatcctg cctggcatcg tgattctgag ctgctactgc 660
atcatctaca gcaagctgag ccacagcaag ggccaccaga agcgggaagg cctgaaaacc 720
accgtgatcc tgattctggc ttctctcgcc tgcctggctg cctactacat cggcatcagc 780
atcgacagct tcactctgtt ggaatcatc aagcagggct gcgagttcga gaacaccgtg 840
cacaagtggg tcagcatctt cgaggccctg gcctttttcc actgctgctt gaacctatc 900
ctgtacgcct tcctggggcg caagtccaag acctctgccc agcacgacct gaccagcgtg 960
tccagaggaa gcagcctgaa gatcctgagc aagggcaaga gaggcggcca cagctccgtg 1020
tctacagaga gcgagagcag cagcttccac agcagc 1056

SEQ ID NO: 13      moltype = DNA length = 1056
FEATURE            Location/Qualifiers
misc_feature        1..1056
                    note = CXCR4 isoform I
source              1..1056
                    mol_type = other DNA
                    organism = synthetic construct

SEQUENCE: 13
atggagggga tcagtatata cacttcagat aactacaccg aggaaatggg ctgaggggac 60
tatgactcca tgaaggaacc ctgtttccgt gaagaaaatg ctaatttcaa taaaatcttc 120
ctgcccacca tctactccat catcttctta actggcattg tgggcaatgg attggtcac 180
ctggctcatg gttaccagaa gaaactgaga agcatgacgg acaagtacag gctgcacctg 240
tcagtggccg acctctcttt tgctatcacg ctctccttct gggcagttga tgcctggcca 300
aactgggtact ttgggaactt cctatgcaag gcagtcacat tcactacac agtcaacctc 360
tacagcagtg tcctcatcct ggcttctcgc agtctggacc gctacctggc catcgtccac 420
gccaccaaca gtcagagggc aaggaagctg ttggctgaaa aggtgggtta tgttggcgtc 480
tggatccctg cctctctgct gactattccc gacttcactt ttgccaacgt cagtggaggc 540
gatgacagat atatctgtga ccgcttctac cccaatgact tgtgggtggg tgtgttcacg 600
tttcaagcaca tcatgggttg ccttatcctg cctggatttg tcactctgtc ctgctattgc 660
attatcatct ccaagctgtc acactccaag ggccaccaga agcgcaaggc cctcaagacc 720
acagtcaccc tcactcctggc ttctctcgcc tgttggctgc cttactacat tgggatcagc 780
atcgactcct tcactcctct ggaatcatc aagcaagggt gtgagtttga gaacactgtg 840
cacaagtggg tttccatcac cgaggcccta gctttcttcc actgttgtct gaaccccatc 900
ctctatgctt tccttgagc caaatttaaa acctctgccc agcacgacct cactctgtg 960
agcagagggt ccagcctcaa gatcctctcc aaaggaaagc gaggtggaca ttcactgtgt 1020
tccactgagt ctgagctctt aagttttcac tccagc 1056

SEQ ID NO: 14      moltype = DNA length = 1068
FEATURE            Location/Qualifiers
misc_feature        1..1068
                    note = CXCR4 Whim isoform II
source              1..1068
                    mol_type = other DNA
                    organism = synthetic construct

SEQUENCE: 14
atgtccattc ctttgcctct tttgcagata tacacttcag ataactacac cgaggaaatg 60
ggctcagggg actatgactc catgaaggaa ccctgtttcc gtgaagaaaa tgctaatttc 120
aataaaatct tcctgcccac catctactcc atcatcttct taactggcat tgtgggcaat 180
ggattgggtc tcctggctcat gggttaccag aagaaactga gaagcatgac ggacaagtac 240
aggctgcacc tgtcagtgcc cgacctctc tttgtcatca cgttccctt ctgggcagtt 300
gatgccgtgg caaactggta ctttgggaac ttcctatgca aggcagtcga tgcatctac 360
acagtcaacc tctacagcag tgcctcctac ctggccttca tcagtctgga ccgctacctg 420
gccatcgtcc acgcccacca cagtcagagg ccaaggaagc tgttggctga aaagggtgct 480
tatgttggcg tctggatccc tgccctcctg ctgactatcc cgaacttcat ctttgccaac 540
gtcagtgagg cagatgacag atatctctgt gaccgcttct accccaatga cttgtgggtg 600
gttgtgttcc agtttcagca catcatgggt ggcccttacc tgcctgggat tgcctcctg 660
tctgtctatt gcattatcat ctccaagctg tcacactcca agggccacca gaagcgcaag 720
gccctcaaga ccacagtcac cctcatcctg gctttcttcc cctgttggct gccttactac 780
attgggatca gcacagactc ctctcatctc ctggaaatca tcaagcaagg gtgtgagttt 840
gagaacactg tgcacaagtg gatttccatc accgaggccc tagctttctt cactgttgt 900
ctgaacccca tctctatgc ttctcttggg gccaaattta aaacctctgc ccagcacgca 960
ctcacctctg tgagcagagg gtccagcctc aagatcctct ccaaaggaaa gtgaggtgga 1020

```

-continued

cattcatctg tttccactga gtctgagtct tcaagttttc actccage 1068

```

SEQ ID NO: 15      moltype = DNA  length = 1068
FEATURE
misc_feature       Location/Qualifiers
                    1..1068
                    note = CXCR4 Whim isoform II
source             1..1068
                    mol_type = other DNA
                    organism = synthetic construct

```

```

SEQUENCE: 15
atgtctattc ctctgccctt gctgcagatc tacaccagcg acaactacac cgaggaaatg 60
ggcagcggcg actacgcacg catgaaggaa ccttgcttcc gggaagagaa cgccaacttc 120
aacaagatct tctgcccacg aatctacagc atcatctttc tgaccggcat cgtgggcaac 180
ggactcgtga tctcgtgatg gggctaccag aaaaagctgc ggagcatgac cgacaagtac 240
cggctgcacc tgagcgtggc cgacctgctg ttcgtgatca ccctgccttt ctgggcccgtg 300
gacgcctggt ccaattggta ctctggcaac ttctgtgca aggcctgtga cgtgatctac 360
acagtgaacc tctacagcag cgtgctgac ctggccttca tcagcctgga cagattacctg 420
gccatcgtgc acgccaccaa cagccagcgg cctagaaaag tgctggccga gaagggtggtg 480
tacgtggggt tgtggattcc gcccctgctg ctgacctcc cgaacttcac ctctgccaac 540
gtgtccgagg ccgacgacgg gtacatctgc gaccgggtct accccaacga cctgtgggtg 600
gtgggtgttc agttccagca catcatggtg ggactgatcc tgctggccat cgtgattctg 660
agctgctact gcctcatcat cagcaagctg agccacagca agggccacca gaagcgggaag 720
gccctgaaaa ccaccgtgat cctgattctg gctttcttcg cctgctggct gccctactac 780
atcgccatca gcctcgacag ctctcatctg ctggaaaatc tcaagcaggg ctgcgagttc 840
gagaacaccc tgacaagtgt gatcagcatt accgaggccc tggccttttt ccaactgtgc 900
ctgaacccta tctctgtacg ctctctgggc gccaaagtca agacctctgc ccagcacgcc 960
ctgaccagcg tgtccagagg aagcagcctg aagatcctga gcaagggcaa gtgaggcgcg 1020
cacagctccg tgtctacaga gagcgagagc agcagcttcc acagcagc 1068

```

```

SEQ ID NO: 16      moltype = DNA  length = 1056
FEATURE
misc_feature       Location/Qualifiers
                    1..1056
                    note = CXCR4 Whim isoform I
source             1..1056
                    mol_type = other DNA
                    organism = synthetic construct

```

```

SEQUENCE: 16
atggagggga tcagtatata cacttcagat aactacacgg aggaaatggg ctccaggggac 60
tatgactcca tgaaggaacc ctgtttccgt gaagaaaatg ctaatttcaa taaaatcttc 120
ctgcccacca tctactccat catcttctta actggcattg tgggcaatgg attggtcac 180
ctggctcatg gttaccagaa gaaactgaga agcatgacgg acaagtacag gctgcacctg 240
tcagtggccg acctcctctt tgtcatcacc ctccctctct gggcagttga tgccgtggca 300
aactggtact ttgggaactt cctatgcaag gcagtccatg tcatctacac agtcaacctc 360
tacagcagtg tctcctcctt ggccttcac agtctggacc gctacctggc catcgtccac 420
gccaccaaca gtcagaggcc aaggaagctg ttggctgaaa aggtggtcta tgttggcgct 480
tggatccctg cctcctctgt gactattccc gacttcactt ttgccaaagt cagtgaaggca 540
gatgacagat atatctgtga ccgcttctac cccaatgact tgtgggtggg tgtgttccag 600
tttcagcaca tcattggttg ccttctcctg cctggtattg tcatcctgtc ctgctattgc 660
attatcatct ccaagctgtc aactccaag ggccaccaga agcgcaaggc cctcaagacc 720
acagtcaccc tcctcctggc tttcttcgcc tgttggctgc cttactacat tgggacacgc 780
atcgactcct tcctcctcct ggaaatcacc aagcaagggt gtgagtttga gaacactgtg 840
cacaagtggg ttccctacac cgaggcccta gctttcttcc actgttgtct gaaccccatc 900
ctctatgctt tccttggagc caaatttaaa acctctgccc agcacgcact cacctctgtg 960
agcagagggt ccagcctcaa gatcctctcc aaaggaaagt gaggtggaca ttcattctgt 1020
tccactgagt ctgagctctc aagttttcac tccagc 1056

```

```

SEQ ID NO: 17      moltype = DNA  length = 1056
FEATURE
misc_feature       Location/Qualifiers
                    1..1056
                    note = CXCR4 Whim isoform I
source             1..1056
                    mol_type = other DNA
                    organism = synthetic construct

```

```

SEQUENCE: 17
atggaaggca tcagcatcta caccagcgac aactacacgg aggaaatggg cagcggcgac 60
tacgacagca tgaaggaacc ctgcttccgg gaagagaacg ccaacttcaa caagatcttc 120
ctgcccacaa tctacagcat catctttctg accggcatcg tgggcaacgg actcgtgatc 180
ctcgtgatgg gctaccagaa aaagctgcgg agcatgaccg acaagtaccg gctgcacctg 240
agcgtggccg acctgctgtt cgtgatcacc ctgcctttct gggccgtgga cgccgtggcc 300
aattggtact tcggcaactt cctgtgcaag gccctgcacg tgatctacac agtgaacctg 360
tacagcagcg tgcgtacctt ggccttcac agcctggaca gatacctggc catcgtgcac 420
gccaccaaca gccacgggcc tagaaagctg ctggccgaga aggtggtgta cgtgggctgt 480
tggattcccg cctcgtgctt gaccatcccc gacttcactt tcgccaacgt gtcgagggcc 540
gacgaccggt acatctgcga ccgggttctac cccaacgacc tgtgggtggg ggtgttccag 600
ttccagcaca tcattggtgg actgatcctg cctggcatcg tgattctgag ctgctactgc 660
atcatcatca gcaagctgag ccacagcaag ggccaccaga agcgggaaggc cctgaaaacc 720

```

-continued

```

accgtgatcc tgattctggc tttcttcgcc tgetggctgc cctactacat cgccatcagc 780
atcgacagct tcactctgct ggaaatcctc aagcagggct gcgagttcga gaacaccgtg 840
cacaagtggg tcagcattac cgaggccctg gcctttttcc actgctgctt gaaccctatc 900
ctgtacgcct tcctggggcg caagttcaag acctctgccc agcacgccct gaccagcgtg 960
tccagaggaa gcagcctgaa gatcctgagc aagggaaggt gaggcggcca cagctccgtg 1020
tctacagaga gcgagagcag cagcttccac agcagc 1056

```

```

SEQ ID NO: 18      moltype = DNA length = 1056
FEATURE            Location/Qualifiers
misc_feature        1..1056
                    note = CXCR4 V160L
source              1..1056
                    mol_type = other DNA
                    organism = synthetic construct

```

```

SEQUENCE: 18
atggaaggca tcagcatcta caccagcgac aactacaccg aggaaatggg cagcggcgac 60
tacgacagca tgaaggaacc ctgcttccgg gaagagaaac ccaacttcaa caagatcttc 120
ctgcccacaa tctacagcat catctttctg accggcatcg tgggcaacgg actcgtgatc 180
ctcgtgatgg gctaccagaa aaagctgcgg agcatgaccg acaagtaccg gctgcacctg 240
agcgtggccg acctgctggt cgtgatcacc ctgcctttct gggccgtgga cgccgtggcc 300
aattgggtact tcggcaactt cctgtgcaag gccgtgcacg tgatctacac agtgaacctg 360
tacagcagcg tgctgatcct ggccttcctc agcctggaca gatacctggc catcgtgcac 420
gccaccaaca gccagcggcc tagaaaagctg ctggccgaga aggtggtgta cgtgggacctg 480
tggtattccc cctgtctgct gaccatcccc gacttcatct tcgccaacgt gtcgagggcc 540
gacgaccggt acatctgcga ccggttctac cccaacgacc tgtgggtggt ggtgttccag 600
ttccagcaca tcattggtggg actgatcctg cctggcatcg tgattctgag ctgctactgc 660
atcatcatca gcaagctgag ccacagcaag ggccaccaga agcgggaaggc cctgaaaacc 720
accgtgatcc tgattctggc tttcttcgcc tgetggctgc cctactacat cgccatcagc 780
atcgacagct tcactctgct ggaaatcctc aagcagggct gcgagttcga gaacaccgtg 840
cacaagtggg tcagcattac cgaggccctg gcctttttcc actgctgctt gaaccctatc 900
ctgtacgcct tcctggggcg caagttcaag acctctgccc agcacgccct gaccagcgtg 960
tccagaggaa gcagcctgaa gatcctgagc aagggaaggt gaggcggcca cagctccgtg 1020
tctacagaga gcgagagcag cagcttccac agcagc 1056

```

```

SEQ ID NO: 19      moltype = DNA length = 1056
FEATURE            Location/Qualifiers
misc_feature        1..1056
                    note = CXCR4 A175F
source              1..1056
                    mol_type = other DNA
                    organism = synthetic construct

```

```

SEQUENCE: 19
atggaaggca tcagcatcta caccagcgac aactacaccg aggaaatggg cagcggcgac 60
tacgacagca tgaaggaacc ctgcttccgg gaagagaaac ccaacttcaa caagatcttc 120
ctgcccacaa tctacagcat catctttctg accggcatcg tgggcaacgg actcgtgatc 180
ctcgtgatgg gctaccagaa aaagctgcgg agcatgaccg acaagtaccg gctgcacctg 240
agcgtggccg acctgctggt cgtgatcacc ctgcctttct gggccgtgga cgccgtggcc 300
aattgggtact tcggcaactt cctgtgcaag gccgtgcacg tgatctacac agtgaacctg 360
tacagcagcg tgctgatcct ggccttcctc agcctggaca gatacctggc catcgtgcac 420
gccaccaaca gccagcggcc tagaaaagctg ctggccgaga aggtggtgta cgtgggacctg 480
tggtattccc cctgtctgct gaccatcccc gacttcatct tcctcaacgt gtcgagggcc 540
gacgaccggt acatctgcga ccggttctac cccaacgacc tgtgggtggt ggtgttccag 600
ttccagcaca tcattggtggg actgatcctg cctggcatcg tgattctgag ctgctactgc 660
atcatcatca gcaagctgag ccacagcaag ggccaccaga agcgggaaggc cctgaaaacc 720
accgtgatcc tgattctggc tttcttcgcc tgetggctgc cctactacat cgccatcagc 780
atcgacagct tcactctgct ggaaatcctc aagcagggct gcgagttcga gaacaccgtg 840
cacaagtggg tcagcattac cgaggccctg gcctttttcc actgctgctt gaaccctatc 900
ctgtacgcct tcctggggcg caagttcaag acctctgccc agcacgccct gaccagcgtg 960
tccagaggaa gcagcctgaa gatcctgagc aagggaaggt gaggcggcca cagctccgtg 1020
tctacagaga gcgagagcag cagcttccac agcagc 1056

```

```

SEQ ID NO: 20      moltype = DNA length = 1056
FEATURE            Location/Qualifiers
misc_feature        1..1056
                    note = CXCR4 Q200A
source              1..1056
                    mol_type = other DNA
                    organism = synthetic construct

```

```

SEQUENCE: 20
atggaaggca tcagcatcta caccagcgac aactacaccg aggaaatggg cagcggcgac 60
tacgacagca tgaaggaacc ctgcttccgg gaagagaaac ccaacttcaa caagatcttc 120
ctgcccacaa tctacagcat catctttctg accggcatcg tgggcaacgg actcgtgatc 180
ctcgtgatgg gctaccagaa aaagctgcgg agcatgaccg acaagtaccg gctgcacctg 240
agcgtggccg acctgctggt cgtgatcacc ctgcctttct gggccgtgga cgccgtggcc 300
aattgggtact tcggcaactt cctgtgcaag gccgtgcacg tgatctacac agtgaacctg 360
tacagcagcg tgctgatcct ggccttcctc agcctggaca gatacctggc catcgtgcac 420

```

-continued

```

gccaccaaca gccagcgggc tagaaagctg ctggccgaga aggtggtgta cgtgggcgtg 480
tggattcccc cctgtctgct gaccatcccc gacttcatct tcgccaacgt gtccgaggcc 540
gacgaccggt acatctcgca cgggtttctac cccaacgacc tgtgggtggt ggtgttcgcg 600
ttccagcaca tcattggtggg actgatcctg cctggcatcg tgattctgag ctgctactgc 660
atcatcatca gcaagctgag ccacagcaag ggccaccaga agcggaaggc cctgaaaacc 720
accgtgatcc tgattctggc ttctctcgcc tgcctggctgc cctactacat cggcatcagc 780
atcgacagct tcactctgct ggaatcatc aagcagggct gcgagttcga gaacaccgtg 840
cacaagtgga tcagcattac cgaggccctg gcctttttcc actgctgcct gaaccctatc 900
ctgtacgcct tcctggggcg caagtccaag acctctgccc agcacgcctc gaccagcgtg 960
tccagaggaa gcagcctgaa gatcctgagc aagggaaga gaggcggcca cagctccgtg 1020
tctacagaga gcgagagcag cagcttccac agcagc 1056

```

```

SEQ ID NO: 21      moltype = DNA length = 1056
FEATURE           Location/Qualifiers
misc_feature       1..1056
                   note = CXCR4 D262N
source             1..1056
                   mol_type = other DNA
                   organism = synthetic construct

```

```

SEQUENCE: 21
atggaaggca tcagcatcta caccagcgac aactacaccg aggaaatggg cagcggcgac 60
tacgacagca tgaaggaaacc ctgcttccgg gaagagaacg ccaacttcaa caagatcttc 120
ctgcccacaa tctacagcat catctttctg accggcatcg tgggcaaccg actcgtgatc 180
ctcgtgatgg gctaccagaa aaagctgcgg agcatgaccg acaagtaccg gctgcacctg 240
agcgtggcgg acctgctggt cgtgatcacc ctgcctttct gggccgtgga cgccgtggcc 300
aattggta ctggcaactt cctgtgcaag gccgtgcacg tgatctacac agtgaacctg 360
tacagcagcg tgctgatcct ggccttcac agcctggaca gatacctggc catcgtgcac 420
gccaccaaca gccagcgggc tagaaagctg ctggccgaga aggtggtgta cgtgggcgtg 480
tggattcccc cctgtctgct gaccatcccc gacttcatct tcgccaacgt gtccgaggcc 540
gacgaccggt acatctcgca cgggtttctac cccaacgacc tgtgggtggt ggtgttcgag 600
ttccagcaca tcattggtggg actgatcctg cctggcatcg tgattctgag ctgctactgc 660
atcatcatca gcaagctgag ccacagcaag ggccaccaga agcggaaggc cctgaaaacc 720
accgtgatcc tgattctggc ttctctcgcc tgcctggctgc cctactacat cggcatcagc 780
atcaacagct tcactctgct ggaatcatc aagcagggct gcgagttcga gaacaccgtg 840
cacaagtgga tcagcattac cgaggccctg gcctttttcc actgctgcct gaaccctatc 900
ctgtacgcct tcctggggcg caagtccaag acctctgccc agcacgcctc gaccagcgtg 960
tccagaggaa gcagcctgaa gatcctgagc aagggaaga gaggcggcca cagctccgtg 1020
tctacagaga gcgagagcag cagcttccac agcagc 1056

```

```

SEQ ID NO: 22      moltype = DNA length = 1056
FEATURE           Location/Qualifiers
misc_feature       1..1056
                   note = CXCR4 H281A
source             1..1056
                   mol_type = other DNA
                   organism = synthetic construct

```

```

SEQUENCE: 22
atggaaggca tcagcatcta caccagcgac aactacaccg aggaaatggg cagcggcgac 60
tacgacagca tgaaggaaacc ctgcttccgg gaagagaacg ccaacttcaa caagatcttc 120
ctgcccacaa tctacagcat catctttctg accggcatcg tgggcaaccg actcgtgatc 180
ctcgtgatgg gctaccagaa aaagctgcgg agcatgaccg acaagtaccg gctgcacctg 240
agcgtggcgg acctgctggt cgtgatcacc ctgcctttct gggccgtgga cgccgtggcc 300
aattggta ctggcaactt cctgtgcaag gccgtgcacg tgatctacac agtgaacctg 360
tacagcagcg tgctgatcct ggccttcac agcctggaca gatacctggc catcgtgcac 420
gccaccaaca gccagcgggc tagaaagctg ctggccgaga aggtggtgta cgtgggcgtg 480
tggattcccc cctgtctgct gaccatcccc gacttcatct tcgccaacgt gtccgaggcc 540
gacgaccggt acatctcgca cgggtttctac cccaacgacc tgtgggtggt ggtgttcgag 600
ttccagcaca tcattggtggg actgatcctg cctggcatcg tgattctgag ctgctactgc 660
atcatcatca gcaagctgag ccacagcaag ggccaccaga agcggaaggc cctgaaaacc 720
accgtgatcc tgattctggc ttctctcgcc tgcctggctgc cctactacat cggcatcagc 780
atcgacagct tcactctgct ggaatcatc aagcagggct gcgagttcga gaacaccgtg 840
gccaagtgga tcagcattac cgaggccctg gcctttttcc actgctgcct gaaccctatc 900
ctgtacgcct tcctggggcg caagtccaag acctctgccc agcacgcctc gaccagcgtg 960
tccagaggaa gcagcctgaa gatcctgagc aagggaaga gaggcggcca cagctccgtg 1020
tctacagaga gcgagagcag cagcttccac agcagc 1056

```

```

SEQ ID NO: 23      moltype = AA length = 323
FEATURE           Location/Qualifiers
REGION            1..323
                   note = CD47
source             1..323
                   mol_type = protein
                   organism = synthetic construct

```

```

SEQUENCE: 23
MWPLVAALLL GSACCSAQL LFNKTKSVEF TFCNDTVVIP CFVTNMEAQN TTEVYVKWKF 60
KGRDIYTFDG ALNKSTVPTD FSSAKIEVSQ LLKGDASLKM DKSDAVSHTG NYTCEVTELT 120

```

-continued

```

REGETIIELEK YRVVSWFSPN ENILIVIFPI FAILLFWGQF GIKTLKYRSG GMDEKTIALL 180
VAGLVITVIV IVGAILFVPG EYSLKNATGL GLIVTSTGIL ILLHYVVFST AIGLTSFVIA 240
ILVIQVIAYI LAVVGLSLCI AACIPMHGPL LISGLSILAL AQLLGLVYMK FVASNQKTIQ 300
PPRKAVEEPL NAFKESKGM NDE 323

```

```

SEQ ID NO: 24      moltype = AA length = 292
FEATURE           Location/Qualifiers
REGION            1..292
                  note = CD47
source            1..292
                  mol_type = protein
                  organism = synthetic construct

```

```

SEQUENCE: 24
MWPLVAALLL GSACCGSAQL LFNKTKSVEF TFCNDTVVIP CFVTNMEAQN TTEVYVKWKF 60
KGRDIYTFDG ALNKSTVPTD FSSAKIEVSQ LLKGDASLKM DKSDAVSHTG NYTCEVTELT 120
REGETIIELEK YRVVSWFSPN ENILIVIFPI FAILLFWGQF GIKTLKYRSG GMDEKTIALL 180
VAGLVITVIV IVGAILFVPG EYSLKNATGL GLIVTSTGIL ILLHYVVFST AIGLTSFVIA 240
ILVIQVIAYI LAVVGLSLCI AACIPMHGPL LISGLSILAL AQLLGLVYMK FV 292

```

```

SEQ ID NO: 25      moltype = AA length = 305
FEATURE           Location/Qualifiers
REGION            1..305
                  note = CD47
source            1..305
                  mol_type = protein
                  organism = synthetic construct

```

```

SEQUENCE: 25
MWPLVAALLL GSACCGSAQL LFNKTKSVEF TFCNDTVVIP CFVTNMEAQN TTEVYVKWKF 60
KGRDIYTFDG ALNKSTVPTD FSSAKIEVSQ LLKGDASLKM DKSDAVSHTG NYTCEVTELT 120
REGETIIELEK YRVVSWFSPN ENILIVIFPI FAILLFWGQF GIKTLKYRSG GMDEKTIALL 180
VAGLVITVIV IVGAILFVPG EYSLKNATGL GLIVTSTGIL ILLHYVVFST AIGLTSFVIA 240
ILVIQVIAYI LAVVGLSLCI AACIPMHGPL LISGLSILAL AQLLGLVYMK FVASNQKTIQ 300
PPRNN 305

```

```

SEQ ID NO: 26      moltype = AA length = 311
FEATURE           Location/Qualifiers
REGION            1..311
                  note = CD47
source            1..311
                  mol_type = protein
                  organism = synthetic construct

```

```

SEQUENCE: 26
MWPLVAALLL GSACCGSAQL LFNKTKSVEF TFCNDTVVIP CFVTNMEAQN TTEVYVKWKF 60
KGRDIYTFDG ALNKSTVPTD FSSAKIEVSQ LLKGDASLKM DKSDAVSHTG NYTCEVTELT 120
REGETIIELEK YRVVSWFSPN ENILIVIFPI FAILLFWGQF GIKTLKYRSG GMDEKTIALL 180
VAGLVITVIV IVGAILFVPG EYSLKNATGL GLIVTSTGIL ILLHYVVFST AIGLTSFVIA 240
ILVIQVIAYI LAVVGLSLCI AACIPMHGPL LISGLSILAL AQLLGLVYMK FVASNQKTIQ 300
PPRKAVEEPL N 311

```

```

SEQ ID NO: 27      moltype = DNA length = 969
FEATURE           Location/Qualifiers
misc_feature      1..969
                  note = CD47
source            1..969
                  mol_type = other DNA
                  organism = synthetic construct

```

```

SEQUENCE: 27
atgtggcctc tcgtggccgc tctgctgctc gggagcgctt gttgcggcag cgcccagctg 60
ctgttcaaca aaaccaagtc cgtcgagttc accttctgca acgacacagt ggtgatcccc 120
tgcttcgtca ccaacatgga ggctcagaat accaccgagg tctacgtcaa gtggaaattc 180
aagggcagag acatctacac ctctcgacga gccctcaaca agagcacagt gcctaccgac 240
ttttccagcg ccaagattga ggtgagccaa ctctgaagg gagacgccag cctgaagatg 300
gacaagagcg atgccgtcag ccacacagga aactacacct gcgaggtgac agagctcacc 360
agagagggcg agaccatcat cgagctcaaa tacagagtgg tgtcctgggt ctcccccaac 420
gagaacatcc tcactgtgat cttcccatc ttgccatcc tgcgtgtctg gggccagttc 480
ggcatcaaaa ccctgaagta tagatccggc ggcattggac agaaaaaat cgccctgctg 540
gtggccggcc tcgtgattac cgtgatcgtc atcgtgggag ccattcctct cgtgcccagg 600
gagtacagcc tcaagaacgc caccggcctg ggctgattg tgacctccac aggcattctg 660
atcctgctgc actactacgt gtteagcaca gccattggcc tcacaagctt cgtgatcgcc 720
atcctgggtc tccagtgat cgccatcatc ctgcgcgtgg tcggactcag cctctgtatt 780
gcccgttgca tccccatgca ggaaccctc ctgatctccg gccctagcat tctggctctc 840
gctcagctgc tcggcctggg gtacatgaag ttctgtcgca gcaaccagaa gaccatccaa 900
ccccccagaa aggcctcgca agagcctctg aacgccttta aggagagcaa gggcatgatg 960
aacgacgag 969

```

```

SEQ ID NO: 28      moltype = DNA length = 969

```


-continued

FEATURE Location/Qualifiers
misc_feature 1..969
 note = CD47
source 1..969
 mol_type = other DNA
 organism = synthetic construct

SEQUENCE: 28

atgtggcccc	tggtagcggc	gctgtgtctg	ggctcggcgt	gctgcggatc	agctcagcta	60
ctattttaata	aaacaaaatc	tgtagaattc	acgtttttgta	atgacactgt	cgtcattcca	120
tgctttgtta	ctaatatgga	ggcacaaaac	actactgaag	tatacgtaaa	gtggaaattt	180
aaaggaagag	atattttacac	ctttgatgga	gctctaaaaca	agtcactgt	ccccactgac	240
tttagtagtg	caaaaattga	agtctcacaa	ttactaaaag	gagatgcctc	tttgaagatg	300
gataagagtg	atgctgtctc	acacacagga	aactacactt	gtgaagtaac	agaattaacc	360
agagaaggtg	aaacgatcat	cgagctaaaa	tatcgtgttg	tttcatgggt	ttctccaaat	420
gaaaatatcc	ttattgttat	tttcccaatt	tttgctatac	tcctgttctg	gggacagttt	480
ggtattaaaa	cacttaataa	tagatccggg	ggtatggatg	agaaaaaca	tgctttactt	540
gttgctggac	tagtgatcac	tgtcattgtc	attgttgagg	ccattctttt	cgtcccaggt	600
gaatattcat	taaagaatgc	tactggcctt	ggtttaattg	tgacttctac	agggatatta	660
atattacttc	actactatgt	gtttagtaca	gcgattggat	taacctcctt	cgtcattgcc	720
atattgggta	ttcagggtgat	agcctatata	ctcgtgtggg	ttggactgag	tctctgtatt	780
gcggcggtga	taccaatgca	tggccctcct	ctgatttcag	gtttgagtat	cttagctcta	840
gcacaattac	tggactagtg	ttatatgaaa	tttggtggct	ccaatcagaa	gactatacaa	900
cctcctagga	aagctgtaga	ggaacccctt	aatgcattca	aagaatcaaa	aggaatgatg	960
aatgatgaa						969

SEQ ID NO: 29 moltype = AA length = 1032

FEATURE Location/Qualifiers
REGION 1..1032
 note = ITGA4
source 1..1032
 mol_type = protein
 organism = synthetic construct

SEQUENCE: 29

MAWEARREPG	PRRAVRETV	MLLLCLGVPT	GRPYNVDTES	ALLYQGPHT	LFGYSVVLHS	60
HGANRWLLVG	APTANWLANA	SVINPGAIYR	CRIGKNPGQT	CEQLQLGSPN	GEPCGKTCLE	120
ERDNQWLGV	LSRQPGENG	IVTCGHRWKN	IFYIKNENKL	PTGGCYGVPP	DLRTELSKRI	180
APCYQDYVKK	FGENFASCQA	GISSFYTKDL	IVMGAPGSSY	WTGSLFVYNI	TTNKYKAFLD	240
KQNQVKFGSY	LGYSVGAGHF	RSQHTTEVVG	GAPQHEQIGK	AYIFSIDEKE	LNILHEMKGK	300
KLGSYFGASV	CAVDLNDG	SDLVVGAPMQ	STIREEGRVF	VYINSGSGAV	MNAMETNLVG	360
SDKYAARFGE	SIVNLGDI	DGFEDVAIGA	PQEDDLQGA	IYINGRADGI	SSTFSQRIEG	420
LQISKLSLMF	QGISGQIDA	DNNGYVDVAV	GAFRSDSAVL	LRTRPVVIVD	ASLSHPESVN	480
RTKFDCEVNG	WPSVCIDLTL	CFSYKGKEVP	GYIVLFYNMS	LDVNRKAESP	PRFYFSSNGT	540
SDVITGSIQV	SSREANCRTH	QAFMRKDVRD	ILTPIQIEAA	YHLGPHVISK	RSTEEFPPLQ	600
PILQQKKEKD	IMKKTINFAR	FCAHENC	SAKIGFPL	KPHENKTYLA	VGSMKTLMLN	660
VSLFNAGDDA	YETTLHVKL	VGLYFIKILE	LEEKQINCEV	TDNSGVVQLD	CSIGYIYVDH	720
LSRIDISFLL	DVSSLSRAEE	DLSITVHATC	ENEEEMDNLK	HSRVTVAIPL	KYEVKLTVHG	780
FVNPTSFVYG	SNDENEPETC	MVEKMNLTFH	VINTGNMAP	NVSVEIMVPN	SFSPQTDKLF	840
NILDVQTTTG	ECHFENYQVR	CALEQQKSAM	QTLKGIVRFL	SKTDKRLLYC	IKADPHCLNF	900
LCNFGKME	SGVHIQLE	GRPSILEMDE	TSALKFEIRA	TGFPEPNPRV	IELNKDENVA	960
HVLLEGLHHQ	RPKRYFTIVI	ISSSLLGLI	VLLISYVMW	KAGFFKRQYK	SILQEENRRD	1020
SWSYINSKSN	DD					1032

SEQ ID NO: 30 moltype = DNA length = 3096

FEATURE Location/Qualifiers
misc_feature 1..3096
 note = ITGA4
source 1..3096
 mol_type = other DNA
 organism = synthetic construct

SEQUENCE: 30

atggcttgagg	aggctcggag	agaacctgga	cctagaagag	ctgccgtgcg	ggagactgtc	60
atgctgtctgc	tgtgcctggg	ggtgcccaca	ggcagacctt	acaacgtgga	taccgagagc	120
gccctgctgt	atcaggcccc	ccacaacacc	ctgtttggct	actctgtggt	gctgcacagc	180
cacggcgcca	accgctggct	gctggtgggc	gccccaccg	ccaattggct	ggccaatgcc	240
tcctgtatca	accagggcgc	catctacaga	tgctcgatcg	gcaagaatcc	tgccagaca	300
tgcgagcagc	tgagctggg	ctcccccaac	ggcgagcctt	gtggcaagac	atgcctggag	360
gagagggaca	atcagtggtg	gggcgtgaca	ctgagcagac	agcccggcga	gaacggctcc	420
atcgtgacat	gcggccacag	atggaagaac	atcttttaca	tcaagaacga	gaataagctg	480
ccaacaggcg	gctgctatgg	cgtgccccca	gacctgagaa	cagagctgag	caagcggatc	540
gccccatgct	accaggatta	tgtgaagaag	tttggcgaga	atthtgcctc	ttgccaggcc	600
ggcatctcct	cctctctaac	caaggatctg	atcgtgatgg	gcgcccctgg	ctcttctcat	660
tggaacaggct	ctctgttctg	gtataatata	acaaccaaca	agtaacaaggc	cttctctggac	720
aagcagaacc	aggtagaatt	cggctcctat	ctgggctaca	gcgtgggcgc	cggccacttt	780
cggctctcagc	acaccacaga	ggtggtgggc	ggcgcccccc	agcacgagca	gatcggcaag	840
gcctacatct	tctccatcga	cgagaaggag	ctgaatatcc	tgacacgat	gaagggcaag	900
aagctgggct	cctactttgg	cgctccgtg	tgccgcgtgg	acctgaatgc	cgacggcttt	960

-continued

```

tccgacctgc tgggtgggcgc cccaatgcag tccacaatca gagaggaggg cagagtgttc 1020
gtgtatatca attcoggcag cggcgccgtg atgaatgcca tggagaccaa tctgggtgggc 1080
tccgacaagt atgcgcgcag attcoggcag agcatcgtga atctgggcga catcgacaaac 1140
gatggcttcg aggacgtggc catcgccgcc ccacaggagg atgacctgca gggcgccatc 1200
tatatctata acggccgggc cgacggcatc tctagcacct tctcccagag aatcgagggc 1260
ctgcagatca gcaagtccct gagcatgttc ggcagagaca tctccggcca gatcgacgcc 1320
gataataacg gctacgtgga tgtggccgtg ggcgccttta gaagcgactc gcgcgtgtg 1380
ctgagaacaa ggcccggtgt gatcgtggat gcctccctgt ctcacccga gtcctgtaat 1440
cggacaaagt ttgactgcgt ggagaatggc tggccaagcg tgtgcactga tctgacactg 1500
tgcttttctc ataagggcaa ggaggtgcca ggctatatcg tgctgtttta caacatgtct 1560
ctggatgtga acagaaaagg cgagtcctcc ccaagattct acttttctc taacggcacc 1620
tctgatgtga tcaccggctc tatccagggt tccagcaggg aggccaatg cagaacccac 1680
caggcccttta tgcggaagga tgtgcgcgac atcctgacct caatccagat cgaggccgcc 1740
tatcacctgg gcccccagct gatctccaag cgggtccacc aggagttccc tccactgcag 1800
ccaatcctgc agcagaagaa ggagaaggac atcatgaaga agacaatcaa ctccgccagg 1860
ttttgcgccc acgagaactg ttccgcccga ctgcaggtgt ctgccaagat cggttctctg 1920
aagcccccag agaacaagac atatctggcc gtgggtctca tgaagacct gatgctgaac 1980
gtgagcctgt ttaacgcggc cgacgatgcc tacgagacaa cactgcactg gaagctgcca 2040
gtgggcctgt acttcatcaa gatcctggag ctggaggaga agcagatcaa ctgtgaggtg 2100
accgataact ccggcggtgt gcaagctgga tgcagcatcg gctatatcta cgtggaccac 2160
ctgtcccga ctcacatctc ttttctgtg gacgtgtcca gcctgtccc ggcgaggag 2220
gacctgtcca tcacagtcca gccaccctgc gagaatgagg aggagatgga caacctgaag 2280
caactccagag tgacagtggc catcccactg aagtacgagg tgaagctgac agtgcacggc 2340
tttgtgaatc caacctcctt cgtgtacggc tccaatgacg agaatgagcc agagacatgt 2400
atggtggaga agatgaacct gacatttcac gtgatcaata caggcaattc tatggccctc 2460
aacgtgagcg tggagatcat ggtgccaaat tctttcagcc cacagacaga caagctgttt 2520
aacatcctgg acgtgcagac aaccacaggc gagtgtcact ttgagaacta ccagagagtg 2580
tgccgccctg agcagcagaa gtcgcccctg cagacactga agggcactcg gagatttctg 2640
agcaagacag ataagaggct gctgtactgc atcaaggccg atccccactg cctgaatttt 2700
ctgtgcaact tcggcaagat ggagctgtgc aaggaggcct ccgtgcacat ccagctggag 2760
ggcagacctt ccactctgga gatggacgag accagcgccc tgaagttcga gatcagagcc 2820
acaggcttcc cagagcccaa cccccgggtg atcgagctga acaaggatga gaacgtggcc 2880
cacgtgctgc tggagggcct gcaccaccag cggcccaaga gatatttcac catcgtgatc 2940
atctccagct ctctgtctgc gggcctgac gtgctgctgc tgatctccta tgtgatgtgg 3000
aaggccggct tctttaagcg gcagtagaag tccatcctgc aggaagaaaa tcgacgcgat 3060
tcatggtctt acattaattc taaatcaaac gacgac 3096

```

```

SEQ ID NO: 31      moltype = AA length = 976
FEATURE           Location/Qualifiers
REGION            1..976
                  note = KIT
source            1..976
                  mol_type = protein
                  organism = synthetic construct

```

```

SEQUENCE: 31
MRGARGAWDF LCVLLLLLRV QTSSQPSVS PGEPSPPSIH PGKSDLIVRV GDEIRLLCTD 60
PGFVKWTFEI LDETENKQN EWITEKAEAT NTGKYCTNK HGLSNSIYVF VRDPAKLFLV 120
DRSLYGKEDN DTLVRCPLTD PEVTNYSLKG CQGKPLPKDL RFIIDPKAGI MIKSVKRAYH 180
RLCLHCSVDQ BGKSVLSEKF ILKVRPAFKA VPVSVSKAS YLLREGEFT VTCTIKDVSS 240
SVYSTWKREN SQTKLQEKYN SWHHGDFNYE RQATLTISSA RVNDSGVFMC YANNTFGSAN 300
VTTTLEVDK GFINIFPMIN TTVFVNDGEN VDLIVEYEF PKPEHQWIY MNRTFTDKWE 360
DYPKSENESE IRYVSELHLT RLKGTGGTGY TFLVNSNDVN AAIANVYVN TKPEILTYDR 420
LVNGLMQCVA AGFPEPTIDW YFCPGTEQRC SASVLPVDVQ TLNSSGPPFG KLVVQSSIDS 480
SAFKHNGTVE CKAYNDVGKT SAYFNPAFKG NNKEQIHPHT LFTPLLIGFV IVAGMMCIIV 540
MILTYKYLQK PMYEVQWKVV EEINGNNYVY IDPTQLPYDH KWEFPRNRLS FGKTLGAGAF 600
GKVVEATAYG LIKSDAAMTV AVKMLKPSAH LTEREALMSE LKVLSYLGNH MNIVNLLGAC 660
TIGGPTLVIT EYCCYGDLN FLRRKRDSFI CSKQEDHAEA ALYKNLLHSK ESSCSDSTNE 720
YMDMKPGVSY VVPTKADKRR SVRIGSYIER DVTAIMEDD ELALDLEDLL SFSYQVAKGM 780
AFLASKNCIH RDLAARNILL THGRITKICD FGLARDIKND SNYVVKGNAR LPVKWMAPE 840
IFNCVYTFES DVWSYGIFLW ELFSLGSSPY PGMPVDSKFY KMIKEGFRML SPEHAPAEMY 900
DIMKTCWDAD PLKRPTFKQI VQLIEKQISE STNHIYSNLA NCSPNRQKPV VDSVRINSV 960
GSTASSSQPL LVHDDV

```

```

SEQ ID NO: 32      moltype = DNA length = 2928
FEATURE           Location/Qualifiers
misc_feature       1..2928
                  note = KIT
source            1..2928
                  mol_type = other DNA
                  organism = synthetic construct

```

```

SEQUENCE: 32
atgagaggcg ctcggggcgc ctgggatttt ctctcgcttc tgctctact gcttcgctc 60
cagacaggct cttctcaacc atctgtgagt ccaggggaaac cgtctccacc atccatccat 120
ccaggaaaat cagacttaat agtccgcgtg ggcgacgaga ttaggtgtgt atgcaactgat 180
cgggctttg tcaaatggac ttttgatc ctggatgaaa cgaatgagaa taagcagaat 240
gaatggatca cggaaaaggc agaagccacc aacaccggca aatacacgtg caccacaaaa 300

```

-continued

```

cacggccttaa gcaattccat ttatgtgttt gtttagagatc ctgccaagct tttccttgtt 360
gaccgctcct tgtatgggaa agaagacaac gacacgctgg tccgctgtcc tctcacagac 420
ccagaagtga ccaattattc cctcaagggg tgccagggga agcctcttcc caaggacttg 480
agggttattc ctgaccccaa ggcggggcatc atgatcaaaa gtgtgaaacg cgcctaccat 540
cggctctgtc tgcattgttc tgtggaccag gagggcaagt cagtgtgtgc ggaaaaattc 600
atcctgaaaag tgaggccagc cttcaagact gtgctgtgtg tgtctgtgtc caaagcaagc 660
tatcttctta ggggaagggga agaattcaca gtgacgtgca caataaaaga tgtgtctagt 720
tctgtgact caacgtggaa aagagaaaaac agtcagacta aactacagga gaaatataat 780
agctggcatc acgggtgact caattatgaa cgtcaggcaa cgttgactat cagttcagcg 840
agagttaatg attctggagt gttcatgtgt tatgccaata atacttttgg atcagcaaat 900
gtcacaacaa ccttggaagt agtagataaa ggattcatta atacttccc catgataaac 960
actacagtat ttgtaaacga tggagaaaat gtagatttga ttgttgaata tgaagcattc 1020
cccaaacctg aacaccagca gtggatctat atgaacagaa ccttcaactg taaatgggaa 1080
gattatccca agctctgaaa tgaagtaaat atcagatacg taagtgaact tcatctaacg 1140
agattaaaag gcaccgaagg aggcaattac acattcctag tgtccaattc tgacgtcaat 1200
gctgccatag catttaattg ttatgtgaat acaaaaccag aaatcctgac ttacgacagg 1260
ctcgtgaatg gcattgctcca atgtgtggca gcaggattcc cagagcccac aatagattgg 1320
tatttttgtc caggaaactg gcagagatgc tctgttctgt tactgccagt ggatgtgcag 1380
acactaaact cactgtgggc accgtttgga aagctagtgg ttcagagttc tatagattct 1440
agtgcattca agcacaatgg cacggttgaa tghtaaggctt acaacgatgt gggcaagact 1500
tctgcctatt ttaactttgc atttaaaggt aacaacaaag agcaaatcca tccccacacc 1560
ctgttcaact cttgtctgat tggtttcgta atcgtagctg gcattgatgt cattattgtg 1620
atgattctga cctacaaaata ttacagaaa cccatgtatg aagtacagt gaaggttgtt 1680
gaggagataa atggaacaa ttatgtttac atagacccaa cacaacttcc ttatgatcac 1740
aaatgggagt ttccagaaa caggctgagt ttgggaaaaa cctgggtgac tggagctttc 1800
gggaagggtg ttgaggcaac tgccttatgg ttaattaaat cagatgcggc catgactgtc 1860
gctgtaaaag tgctcaagcc gagtgcccat ttgacagaa ggggaagccct catgtctgaa 1920
ctcaaaagtc tgagttaact tggtaatcac atgaatatgt tgaatctact tggagcctgc 1980
accattggag gggccacctt ggtcattaca gaattattgt gctatggatg tcttttgaat 2040
tttttgagaa gaaaacgtga ttcatattt tgttcaaaag aggaagatca tgcagaagct 2100
gcactttata agaattctct gattcaaaag gactcttctc gcagcgatag tactaatgag 2160
tacatggaca tgaacctggt agtttcttat gttgtcccaa ccaaggccga caaaaggaga 2220
tctgtgagaa taggtcata catagaaaag gatgtgactc ccgcatcat ggaggatgac 2280
gagttggccc tagacttaga agacttgcgt agcttttctt accaggtggc aaagggcagt 2340
gcttctcctg cctccaagaa ttgtattcac agagacttgg cagccagaaa tatcctcctt 2400
actcatggtc ggatcacaaa gattttgatg ttgtgtctag ccagagacat caagaatgat 2460
tctaattatg tgggttaaagg aaacgctcga ctactgtgta agtggatggc acctgaaagc 2520
attttcaact gtgtatacac gtttgaagt gacgtctggt cctatggggt ttttctttgg 2580
gagctgttct ctttaggaag cagcccctat cctggaatgc cggctgatgc taagttctac 2640
aagatgatca aggaaggctg ccggatgctc agccctgaac acgcacctgc tgaatgtat 2700
gacataatga agacttgcgt ggatgcagat cccctaaaaa gaccaacatt caagcaaat 2760
gttcagctaa ttgagaagca gatttcagag agcaccaatc atatttactc caacttagca 2820
aaactgcagc ccaaccgaca gaagcccggt gtagaccatt ctgtgcggat caattctgtc 2880
ggcagcaccg cttcctctct ccagcctctg cttgtgcacg acgatgtc 2928

```

```

SEQ ID NO: 33      moltype = RNA length = 40
FEATURE           Location/Qualifiers
misc_feature       1..40
                   note = translation non-blocking eIF4G aptamer
source            1..40
                   mol_type = other RNA
                   organism = synthetic construct

```

```

SEQUENCE: 33
actcactatt tgttttcgcg cccagttgca aaaagtgtcg 40

```

```

SEQ ID NO: 34      moltype = RNA length = 41
FEATURE           Location/Qualifiers
misc_feature       1..41
                   note = translation non-blocking eIF4G aptamer
source            1..41
                   mol_type = other RNA
                   organism = synthetic construct

```

```

SEQUENCE: 34
gactcactat ttgttttcgc gcccagttgc aaaaagtgtc g 41

```

```

SEQ ID NO: 35      moltype = RNA length = 40
FEATURE           Location/Qualifiers
misc_feature       1..40
                   note = translation non-blocking eIF4G aptamer
source            1..40
                   mol_type = other RNA
                   organism = synthetic construct

```

```

SEQUENCE: 35
tccgcggcgc catctcatgt ttagtgtgcc tatgtcgagc 40

```

```

SEQ ID NO: 36      moltype = RNA length = 41

```

-continued

FEATURE Location/Qualifiers
misc_feature 1..41
note = translation non-blocking eIF4G aptamer
source 1..41
mol_type = other RNA
organism = synthetic construct

SEQUENCE: 36
tccgtagaaa cgcgtaaagg tgaagtttg agggctcctc a 41

SEQ ID NO: 37 moltype = RNA length = 592
FEATURE Location/Qualifiers
misc_feature 1..592
note = WPRE
source 1..592
mol_type = other RNA
organism = synthetic construct

SEQUENCE: 37
aatcaacctc tggattacaa aatttgtgaa agattgactg gtattcttaa ctatgttgct 60
ccttttacgc tatgtggata cgctgcttta atgcctttgt atcatgctat tgcttcccg 120
atggcctttca tttctctcct cttgtataaa tctctggtgc tgtctcttta tggaggagttg 180
tggcccgcttg tcaggcaacg tggcgtggtg tgcactgtgt ttgctgacgc aacccccact 240
ggttggggca ttgccaccac ctgtcagctc ctttcgggga ctttgcgttt cccctccct 300
attgccacgg cggaactcat cgccgcctgc cttgcccgcg gctggacagg ggctcggtg 360
ttgggcactg acaattccgt ggtgtgtgctc gggaaatcat cgtcctttcc ttggctgctc 420
gcctgtgttg ccacctggat tctgcgcggg acgtccttct gctacgtccc ttcgccctc 480
aatccagcgg accttccttc ccgcggcctg ctgcgcgctc tgcggcctct tccgcgtctt 540
cgcttcgcgc ctacagcagag tcggatctcc ctttggggcg cctcccgcgc tg 592

SEQ ID NO: 38 moltype = length =
SEQUENCE: 38
000

SEQ ID NO: 39 moltype = RNA length = 1858
FEATURE Location/Qualifiers
misc_feature 1..1858
note = CXCR4 WT
source 1..1858
mol_type = other RNA
organism = synthetic construct

SEQUENCE: 39
taatacgact cactataagg actcactatt tgttttcgcg cccagttgca aaaagtgtcg 60
ccaccatgga aggcacacgc atctacacca gcgacaacta caccagaggaa atgggcagcg 120
gcgactacga cagcatgaag gaacctgtgt tccgggaaga gaacgccaac ttcaacaaga 180
tcttcctgcc cacaatctac agcatcatct ttctgaccgg catcgtgggc aacggactcg 240
tgatcctcgt gatgggtac cagaaaaagc tgcggagcat gaccgacaag taccggctgc 300
acctgagcgt ggccgacctg ctgttcgtga tcacctgcc tttctgggccc gtggacgccc 360
tggccaattg gtaactcggc aacttcctgt gcaaggccgt gcacgtgac tacacagtga 420
acctgtacag cagcgtgctg atcctggcct tcatcagcct ggacagatac ctggccatcg 480
tgcacgcgac caacagccag cggcctagaa agctgctggc cgagaagggt gtgtacgtgg 540
gcgtgtggat tcccgccctg ctgctgacca tcccgcactt catcttcgcc aacgtgtccg 600
agggcgacga ccgttacatc tgcgaccggt tctaccccaa cgacctgtgg gtgggtgggt 660
tccagttcca gcacatcatg gtgggactga tctgtcctgg catcgtgatt ctgagctgct 720
actgcatcat catcagcaag ctgagccaca gcaagggccca ccagaagcgg aaggccctga 780
aaaccaccgt gatcctgatt ctggcctttct tcgcctgctg gctgccctac tacatcgcca 840
tcagcatcga cagcttcac cgtctggaaa tcatcaagca gggctgcgag ttcgagaaca 900
ccgtgcacaa gtggatcagc attaccgagg ccttggcctt tttccactgc tgctgaacc 960
ctatcctgta cgccttcctg ggcgccaagt tcaagacctc tgcccagcac gccctgacca 1020
gcgtgtccag aggaagcagc ctgaagatcc tgagcaaggg caagagaggc ggccacagct 1080
ccgtgtctac agagagcgag agcagcagct tccacagcag ctgaaatcaa cctctggatt 1140
acaaaatttg tgaagattg actggtattc ttaactatgt tgctcctttt acgctatgtg 1200
gatacgctgc tttaatgcct ttgtatcatg ctattgcttc ccgtatggct ttcattttct 1260
cctccttgta taaatcctgg ttgctgtctc tttatgagga gttgtggccc gttgtcaggg 1320
aacgtggcgt ggtgtgcact gtgtttgctg acgcaacccc cactgggttg ggcatggcca 1380
ccacctgtca gctcctttcc gggactttcg ctttccccct cctatttgcc acggcggaac 1440
tcacgcgcgc ctgccttgcc cgctgtcgga caggggctcg gctgttgggc actgacaatt 1500
ccgtggtgtt gtcggggaaa tcatcgtcct ttccttggct gctcgctgtg gttgccacct 1560
ggattctgcg cgggacgtcc ttctgtacg tcccttcggc cctcaatcca gcggaccttc 1620
cttcccgcgg cctcgtgcgc gctctgcggc ctcttcgcgc tcttcgcctt cgccctcaga 1680
cgagtcggat ctccctttgg gccgcctccc cgctgttaa ttaaaaaaaaa aaaaaaaaaa 1740
aaaaaaaaaa aaaaaaaaaa aaaaaaaaaa aaaaaaaaaa aaaaaaaaaa aaaaaaaaaa 1800
aaaaaaaaaa aaaaaaaaaa aaaaaaaaaa aaaaaaaaaa aaaaaaaaaa aaaaaaaaaa 1858

SEQ ID NO: 40 moltype = RNA length = 1858
FEATURE Location/Qualifiers
misc_feature 1..1858
note = CXCR4 V160L

-continued

```
source          1..1858
                 mol_type = other RNA
                 organism = synthetic construct

SEQUENCE: 40
taatacgact cactataaagg actcactatt tgttttcgcg cccagttgca aaaagtgtcg 60
ccaccatgga aggcacacagc atctacacca gcgacaacta caccgaggaa atgggcagcg 120
gcgactacga cagcatgaag gaacctgctt tccgggaaga gaacgccaac ttcaacaaga 180
tcttcctgcc cacaatctac agcatcatct ttctgaccgg catcgtgggc aacggactcg 240
tgatcctcgt gatgggtac cagaaaaagc tgcggagcat gaccgacaag taccggctgc 300
acctgagcgt ggccgacctg ctgttcgtga tcacctgcc tttctgggcc gtggacgcgc 360
tggccaattg gtacttcggc aacttcctgt gcaaggccgt gcacgtgatc tacacagtga 420
acctgtacag cagcgtgctg atcctggcct tcatcagcct ggacagatac ctggccatcg 480
tgcacgccac caacagccag cggcctagaa agctgctggc cgagaagggtg gtgtacgtgg 540
gcctgtggat tcccgccctg ctgctgacca tcccgcactt catcttcgcc aacgtgtccg 600
aggccgacga cgggtacatc tgcgaccggt tctaccccaa cgacctgtgg gtggtggtgt 660
tccagttcca gcacatcatg gtgggactga tctgctctgg catcgtgatt ctgagctgct 720
actgcatcat catcagcaag ctgagccaca gcaagggccca ccagaagcgg aaggccctga 780
aaaccaccgt gatcctgatt ctggctttct tcgctgctg gctgccctac tacatcgga 840
tcagcatcga cagcttcac cgtctggaaa tcatcaagca gggctgcgag ttcgagaaca 900
ccgtgcacaa gtggatcagc attaccgagg ccttggcctt tttccactgc tgcctgaacc 960
ctatcctgta cgcttctctg ggcgcgaagt tcaagacctc tgcccagcac gccctgacca 1020
gcgtgtccag aggaagcagc ctgaagatcc tgagcaaggc caagagaggc ggccacagct 1080
ccgtgtctac agagagcgag agcagcagct tccacagcag ctgaaatcaa cctctggatt 1140
acaaaatttg tgaagattg actggtattc ttaactatgt tgctcctttt acgctatgtg 1200
gatacgctgc tttaatgcct ttgtatcatg ctattgcttc cgtatggctt tcattttct 1260
ctcctttgta taaatcctgg ttgctgtctc tttatgagga gttgtggccc gttgtcaggc 1320
aacgtggcgt ggtgtgcaat gtgtttgctg acgcaacccc cactggttgg ggcattgcca 1380
ccacctgtca gctccttctc gggactttcg ctttccccct ccctattgcc acggcggaac 1440
tcacgcgcgc ctgccttgcc cgctgctgga caggggctcg gctgttgggc actgacaatt 1500
ccgtgggtgt gtccgggaaa tcacgtcctc ttccttggtc gctcgctgtg gttgccacct 1560
ggattctgcy cgggacgtcc ttctgtacg tcccttcggc cctcaatcca gcggaccttc 1620
cttcccgcgg cctgctgcgc gctctgcggc ctcttcgcgc tcttcgcctt cgcctcaga 1680
cgagtcggat ctccctttgg gccgcctccc cgctgttaa ttaaaaaaaa aaaaaaaa 1740
aaaaaaaaaa aaaaaaaaaa aaaaaaaaaa aaaaaaaaaa aaaaaaaaaa aaaaaaaa 1800
aaaaaaaaaa aaaaaaaaaa aaaaaaaaaa aaaaaaaaaa aaaaaaaaaa aaaaaaaa 1858

SEQ ID NO: 41      moltype = RNA length = 1858
FEATURE           Location/Qualifiers
misc_feature       1..1858
                   note = CXCR4 A175F
source            1..1858
                  mol_type = other RNA
                  organism = synthetic construct

SEQUENCE: 41
taatacgact cactataaagg actcactatt tgttttcgcg cccagttgca aaaagtgtcg 60
ccaccatgga aggcacacagc atctacacca gcgacaacta caccgaggaa atgggcagcg 120
gcgactacga cagcatgaag gaacctgctt tccgggaaga gaacgccaac ttcaacaaga 180
tcttcctgcc cacaatctac agcatcatct ttctgaccgg catcgtgggc aacggactcg 240
tgatcctcgt gatgggtac cagaaaaagc tgcggagcat gaccgacaag taccggctgc 300
acctgagcgt ggccgacctg ctgttcgtga tcacctgcc tttctgggcc gtggacgcgc 360
tggccaattg gtacttcggc aacttcctgt gcaaggccgt gcacgtgatc tacacagtga 420
acctgtacag cagcgtgctg atcctggcct tcatcagcct ggacagatac ctggccatcg 480
tgcacgccac caacagccag cggcctagaa agctgctggc cgagaagggtg gtgtacgtgg 540
gcgtgtggat tcccgccctg ctgctgacca tcccgcactt catcttcctc aacgtgtccg 600
aggccgacga cgggtacatc tgcgaccggt tctaccccaa cgacctgtgg gtggtggtgt 660
tccagttcca gcacatcatg gtgggactga tctgctctgg catcgtgatt ctgagctgct 720
actgcatcat catcagcaag ctgagccaca gcaagggccca ccagaagcgg aaggccctga 780
aaaccaccgt gatcctgatt ctggctttct tcgctgctg gctgccctac tacatcgga 840
tcagcatcga cagcttcac cgtctggaaa tcatcaagca gggctgcgag ttcgagaaca 900
ccgtgcacaa gtggatcagc attaccgagg ccttggcctt tttccactgc tgcctgaacc 960
ctatcctgta cgcttctctg ggcgcgaagt tcaagacctc tgcccagcac gccctgacca 1020
gcgtgtccag aggaagcagc ctgaagatcc tgagcaaggc caagagaggc ggccacagct 1080
ccgtgtctac agagagcgag agcagcagct tccacagcag ctgaaatcaa cctctggatt 1140
acaaaatttg tgaagattg actggtattc ttaactatgt tgctcctttt acgctatgtg 1200
gatacgctgc tttaatgcct ttgtatcatg ctattgcttc cgtatggctt tcattttct 1260
ctcctttgta taaatcctgg ttgctgtctc tttatgagga gttgtggccc gttgtcaggc 1320
aacgtggcgt ggtgtgcaat gtgtttgctg acgcaacccc cactggttgg ggcattgcca 1380
ccacctgtca gctccttctc gggactttcg ctttccccct ccctattgcc acggcggaac 1440
tcacgcgcgc ctgccttgcc cgctgctgga caggggctcg gctgttgggc actgacaatt 1500
ccgtgggtgt gtccgggaaa tcacgtcctc ttccttggtc gctcgctgtg gttgccacct 1560
ggattctgcy cgggacgtcc ttctgtacg tcccttcggc cctcaatcca gcggaccttc 1620
cttcccgcgg cctgctgcgc gctctgcggc ctcttcgcgc tcttcgcctt cgcctcaga 1680
cgagtcggat ctccctttgg gccgcctccc cgctgttaa ttaaaaaaaa aaaaaaaa 1740
aaaaaaaaaa aaaaaaaaaa aaaaaaaaaa aaaaaaaaaa aaaaaaaaaa aaaaaaaa 1800
aaaaaaaaaa aaaaaaaaaa aaaaaaaaaa aaaaaaaaaa aaaaaaaaaa aaaaaaaa 1858
```

-continued

```

SEQ ID NO: 42      moltype = RNA  length = 1858
FEATURE            Location/Qualifiers
misc_feature       1..1858
                   note = CXCR4 Q200A
source             1..1858
                   mol_type = other RNA
                   organism = synthetic construct

SEQUENCE: 42
taatacgact cactataagg actcactatt tgttttcgcg cccagttgca aaaagtgtcg 60
ccaccatgga aggcacagc atctacacca gcgacaacta caccgaggaa atgggcagcg 120
gcgactacga cagcatgaag gaaccctgct tccgggaaga gaacgccaac ttcaacaaga 180
tcttcctgcc cacaatctac agcatcatct ttctgaccgg catcgtgggc aacggactcg 240
tgatcctcgt gatgggctac cagaaaaagc tgcggagcat gaccgacaag tacgggctgc 300
acctgagcgt ggcgcacctg ctgttcgtga tcacctgcc tttctgggcc gtggacgccg 360
tggccaattg gtacttcggc aacttcctgt gcaaggccgt gcacgtgac tacacagtga 420
acctgtacag cagcgtgctg atcctggcct tcacagcct ggacagatac ctggccatcg 480
tgcacgccac caacagccag cggcctagaa agctgctggc cgagaagggt gtgtacgtgg 540
gcgtgtggat tcccgccctg ctgctgacca tcccgcactt catcttcgcc aacgtgtccg 600
aggccgacga ccggtacatc tgcgaccggg tctaccccaa cgacctgtgg gtggtgggtg 660
tcgctgtcca gcacatcatg gtgggactga tcctgcctgg catcgtgatt ctgagctgct 720
actgcatcat catcagcaag ctgagccaca gcaagggccca ccagaagcgg aaggccctga 780
aaaccaccgt gatcctgatt ctggctttct tcgctgctg gctgccctac tacatcggca 840
tcagcatcga cagcttcacg ctgctggaaa tcatcaagca gggctcgcag ttcgagaaca 900
ccgtgcacaa gtggatcagc attaccgagg ccctggcctt ttccactgc tgcctgaacc 960
ctatcctgta cgccttcctg ggcgccaaat tcaagacctc tgcccagcac gccctgacca 1020
gcgtgtccag aggaagcagc ctgaagatcc tgagcaaggg caagagaggc ggccacagct 1080
ccgtgtctac agagagcgag agcagcagct tccacagcag ctgaaatcaa cctctggatt 1140
acaaaatttg tgaagattg actggtattc ttaactatgt tgctcctttt acgctatgtg 1200
gatacgtgcg tttaatgctt ttgtatcatg ctattgcttc ccgtatggct ttcattttct 1260
cctccttgta taaatcctgg ttgctgtctc ttatgaggga gttgtggccc gttgtcaggc 1320
aacgtggcgt ggtgtgcaat gtgtttgctg acgcaacccc cactggttgg ggcattgcca 1380
ccacctgtca gctcctttcc gggactttcg ctttccccct ccctattgcc acggcggaac 1440
tcacgcgcgc ctgccttgcc cgtcgtgga caggggctcg gctgttgggc actgacaatt 1500
ccgtgggtgt gtcggggaat tcacgtcctt ttcttggct gctcgcctgt gttgccacct 1560
ggattctgcg cgggacgttc ttctgtacg tcccttcggc cctcaatcca gcggaccttc 1620
cttcccgcg cctgctgcgc gctctgcggc ctcttcgcgc tcttcgcctt cgcctcaga 1680
cgagtcggat ctcctcttgg gccgcctccc cgctgttaa ttaaaaaaaaa aaaaaaaaaa 1740
aaaaaaaaaa aaaaaaaaaa aaaaaaaaaa aaaaaaaaaa aaaaaaaaaa 1800
aaaaaaaaaa aaaaaaaaaa aaaaaaaaaa aaaaaaaaaa aaaaaaaaaa 1858

```

```

SEQ ID NO: 43      moltype = RNA  length = 1858
FEATURE            Location/Qualifiers
misc_feature       1..1858
                   note = CXCR4 D262N
source             1..1858
                   mol_type = other RNA
                   organism = synthetic construct

SEQUENCE: 43
taatacgact cactataagg actcactatt tgttttcgcg cccagttgca aaaagtgtcg 60
ccaccatgga aggcacagc atctacacca gcgacaacta caccgaggaa atgggcagcg 120
gcgactacga cagcatgaag gaaccctgct tccgggaaga gaacgccaac ttcaacaaga 180
tcttcctgcc cacaatctac agcatcatct ttctgaccgg catcgtgggc aacggactcg 240
tgatcctcgt gatgggctac cagaaaaagc tgcggagcat gaccgacaag tacgggctgc 300
acctgagcgt ggcgcacctg ctgttcgtga tcacctgcc tttctgggcc gtggacgccg 360
tggccaattg gtacttcggc aacttcctgt gcaaggccgt gcacgtgac tacacagtga 420
acctgtacag cagcgtgctg atcctggcct tcacagcct ggacagatac ctggccatcg 480
tgcacgccac caacagccag cggcctagaa agctgctggc cgagaagggt gtgtacgtgg 540
gcgtgtggat tcccgccctg ctgctgacca tcccgcactt catcttcgcc aacgtgtccg 600
aggccgacga ccggtacatc tgcgaccggg tctaccccaa cgacctgtgg gtggtgggtg 660
tcagtttcca gcacatcatg gtgggactga tcctgcctgg catcgtgatt ctgagctgct 720
actgcatcat catcagcaag ctgagccaca gcaagggccca ccagaagcgg aaggccctga 780
aaaccaccgt gatcctgatt ctggctttct tcgctgctg gctgccctac tacatcggca 840
tcagcatcaa cagcttcacg ctgctggaaa tcatcaagca gggctcgcag ttcgagaaca 900
ccgtgcacaa gtggatcagc attaccgagg ccctggcctt ttccactgc tgcctgaacc 960
ctatcctgta cgccttcctg ggcgccaaat tcaagacctc tgcccagcac gccctgacca 1020
gcgtgtccag aggaagcagc ctgaagatcc tgagcaaggg caagagaggc ggccacagct 1080
ccgtgtctac agagagcgag agcagcagct tccacagcag ctgaaatcaa cctctggatt 1140
acaaaatttg tgaagattg actggtattc ttaactatgt tgctcctttt acgctatgtg 1200
gatacgtgcg tttaatgctt ttgtatcatg ctattgcttc ccgtatggct ttcattttct 1260
cctccttgta taaatcctgg ttgctgtctc ttatgaggga gttgtggccc gttgtcaggc 1320
aacgtggcgt ggtgtgcaat gtgtttgctg acgcaacccc cactggttgg ggcattgcca 1380
ccacctgtca gctcctttcc gggactttcg ctttccccct ccctattgcc acggcggaac 1440
tcacgcgcgc ctgccttgcc cgtcgtgga caggggctcg gctgttgggc actgacaatt 1500
ccgtgggtgt gtcggggaat tcacgtcctt ttcttggct gctcgcctgt gttgccacct 1560
ggattctgcg cgggacgttc ttctgtacg tcccttcggc cctcaatcca gcggaccttc 1620
cttcccgcg cctgctgcgc gctctgcggc ctcttcgcgc tcttcgcctt cgcctcaga 1680

```

-continued

```

cgagtcggat ctcctcttgg gccgcctccc cgctgttaa ttaaaaaaaaa aaaaaaaaaa 1740
aaaaaaaaaa aaaaaaaaaa aaaaaaaaaa aaaaaaaaaa aaaaaaaaaa aaaaaaaaaa 1800
aaaaaaaaaa aaaaaaaaaa aaaaaaaaaa aaaaaaaaaa aaaaaaaaaa aaaaaaaaaa 1858

```

```

SEQ ID NO: 44      moltype = RNA length = 1858
FEATURE           Location/Qualifiers
misc_feature       1..1858
                   note = CXCR4 H281A
source            1..1858
                   mol_type = other RNA
                   organism = synthetic construct

```

```

SEQUENCE: 44
taatacgact cactataagg actcactatt tgttttcgcg ccagttgca aaaagtgtcg 60
ccaccatgga aggcatacgc atctacacca gcgacaacta caccgaggaa atgggcagcg 120
gcgactacga cagcatgaag gaaccctgct tccgggaaga gaacgccaac ttcaacaaga 180
tcttctgccc cacaatctac agcatcatct ttctgaccgg catcgtgggc aacggactcg 240
tgatcctcgt gatgggctac cagaaaaaagc tgcggagcat gaccgacaag taccggctgc 300
acctgagcgt ggcgcacctg ctgttcgtga tcacctgccc tttctgggcc gtggacgccc 360
tggccaattg gtacttcggc aacttcctgt gcaaggccgt gcacgtgac tacacagtga 420
acctgtacag cagcgtcgtg atcctggcct tcatacagcct ggacagatac ctggccatcg 480
tgcacgccac caacagccag cggcctagaa agctgctggc cgagaagggt gtgtacgtgg 540
gcgtgtggat tcccgcctg ctgctgacca tcccgcactt catcttcgcc aacgtgtccg 600
aggcgcagca tccgtacatc tgcgaccggt tctaccccaa cgacctgtgg tgggtggtgt 660
tcaggttcca gcacatcatg gtgggactga tctgcctggt catcgtgatt ctgagctgct 720
actgcatcat catcagcaag ctgagccaca gcaagggccca ccagaagcgg aaggccctga 780
aaaccacggt gatcctgatt ctggctttct tgcctgctg gctgccctac tacatcgcca 840
tcagcatcga cagcttcatc ctgctggaaa tcatcaagca gggctgcgag ttcgagaaca 900
ccgtggccaa gtggtacagc attaccgagg ccctggcctt tttccactgc tgctgaacc 960
ctatcctgta gccttctctt ggcgcctaat tcaagacctc tgcccagcac gccctgacca 1020
gcgtgtccag aggaagcagc ctgaagatcc tgagcaaggc caagagaggg gccacagct 1080
ccgtgtctac agagagcgag agcagcagct tccacagcag ctgaatcaa cctctggatt 1140
acaaaatttg tgaagatttg actggtattc ttaactatgt tgctcctttt acgctatgtg 1200
gatacgctgc ttaaatgcct ttgtatcatg ctattgcttc ccgtatggct ttcattttct 1260
ctccttggta taaatcctgg ttgtgtcttc tttatgagga gttgtggccc gttgtcaggc 1320
aacgtggcgt ggtgtgcact gtgtttgctg acgcaacccc cactgggttg ggcattgcca 1380
ccacctgtca gctcctttcc gggactttcg ctttccccct ccctattgcc acggcggaac 1440
tcacgcgcgc ctgccttgcc cgtcgttgga caggggctcg gctgttgggc actgacaatt 1500
ccgtgggtgt gtcggggaaa tcacgtcctt ttccttggtc gctcgctgtg gttgccacct 1560
ggattctcgc cgggacgtcc ttctgtacg tcccttcggc cctcaatcca gcggaccttc 1620
cttccgcggt cctcgtgccg gctctgcggc ctcttcgcgt tcttcgcctt cgccctcaga 1680
cgagtcggat ctcctcttgg gccgcctccc cgctgttaa ttaaaaaaaaa aaaaaaaaaa 1740
aaaaaaaaaa aaaaaaaaaa aaaaaaaaaa aaaaaaaaaa aaaaaaaaaa aaaaaaaaaa 1800
aaaaaaaaaa aaaaaaaaaa aaaaaaaaaa aaaaaaaaaa aaaaaaaaaa aaaaaaaaaa 1858

```

```

SEQ ID NO: 45      moltype = RNA length = 3898
FEATURE           Location/Qualifiers
misc_feature       1..3898
                   note = ITGA4
source            1..3898
                   mol_type = other RNA
                   organism = synthetic construct

```

```

SEQUENCE: 45
taatacgact cactataagg actcactatt tgttttcgcg ccagttgca aaaagtgtcg 60
ccaccatggc ttgggagggt cggagagaa cttggacctag aagagctgcc gtgcgggaga 120
ctgtcatgct gctgctgtgc ctgggggtgc ccacaggcag accttacaac gtggataaccg 180
agagcgccct cgtgtatcag ggcctccaca acacctgtt ttgctactct gtggtgctgc 240
acagccacgg cgccaaccgc ttgctgctgg tgggcgcccc caccgccaat tggctggcca 300
atgcctcgtg gatcaaccga ggcgcctatc acagatgtcg gatcggcaag aatcctggcc 360
agacatgcga gcagctgcag ctgggctccc ccaacggcga gccttgtggc aagacatgcc 420
tggaggagag ggacaatcag ttgctgggctg tgacactgag cagacagccc ggcgagaacg 480
gctccatcgt gacatgcggc cacagatgga agaactctt ttacatcaag aacgagaata 540
agctgccaac aggcggctgc tatggcgtgc cccagacct gagaacagag ctgagcaagc 600
ggatcgcccc atgctaccag gattatgtga agaagtttgg cgagaatttt gcctcttgcc 660
aggcggcatc ctctctcttc tacaccaagg atctgatcgt gatgggcgcc cctggctctt 720
cctattggac aggcctctctg ttctgtgata atatcacaa caacaagtac aaggccttcc 780
tggacaagca gaaccagggt aagttcggct cctatctggg ctacagcgtg ggcgcgggcc 840
actttcggtc tcagcacacc acagaggtgg tgggcggcgc cccccagcac gagcagatcg 900
gcaaggccta catcttctcc atcgacgaga aggagctgaa tatcctgcac gagatgaagg 960
gcaagaagct gggctcctac tttggcgctt ccgtgtgcgc cgtggacctg aatgccgacg 1020
gcttttcgga cctgctgggt ggcgccccaa tgcagctcac aatcagagag gagggcagag 1080
tgttcgtgta tatcaattcc ggcagcggcg ccgtgatgaa tgccatggag accaatctgg 1140
tgggctccga caagtatgcc gccagattcg gcgagagcat cgtgaatctg ggcgacatcg 1200
acaacgatgg cttcgaggac gtggccatcg gcgccccaca ggaggatgac ctgcagggag 1260
ccatctatat ctataacggc cgggcgcagc gcactcttag caccttctcc cagagaatcg 1320
aggcctgca gatcagcaag tccctgagca gactcctccc ggcagatcg 1380
acgccgataa taacggctac gtggatgtgg ccgtgggcgc ctttagaagc gactccgccc 1440

```

-continued

tgtctgtgag	aacaaggccc	gtggtgatcg	tggatgctc	cctgtctcac	cccagatccg	1500
tgaatcggac	aaagtttgac	tgcgtggaga	atggctggcc	aagcgtgtgc	atcgatctga	1560
cactgtgctt	ttctataaag	ggcaaggagg	tgccaggcta	tatcgtgctg	ttttacaaca	1620
tgtctctgga	tgtgaacaga	aaggccgagt	ccccccaag	attctacttt	tcctctaacg	1680
gcacctctga	tgtgatcacc	ggctctatcc	aggtgtccag	cagggaggcc	aattgcagaa	1740
cccaccaggc	ctttatcgcg	aaggatgtgc	gcgacatcct	gacccaatc	cagatcgagg	1800
ccgctatca	cctgggcccc	cagtgatct	ccaagcggtc	caccgaggag	ttccctccac	1860
tcagcccaat	cctgcagcag	aagaaggaga	aggacatcat	gaagaagaca	atcaacttcg	1920
ccaggttttg	cgcccacgag	aactgttccg	ccgacctgca	ggtgtctgcc	aagatcggct	1980
tcctgaagcc	ccacgagaac	aagacatata	tggccgtggg	ctccatgaag	accctgatgc	2040
tgaacgtgag	cctgtttaac	gccggcgacg	atgcctacga	gacaaactcg	cacgtgaagc	2100
tgccagtggtg	cctgtacttc	atcaagatcc	tggagctgga	ggagaagcag	atcaactgtg	2160
aggtgaccga	taactccggc	gtggtgcagc	tggattgcag	catcggttat	atctacgtgg	2220
accacctgtc	ccgcatcgac	atctcttttc	tgctggacgt	gtccagcctg	tcccggggcg	2280
aggaggacct	gtccatcaca	gtgcacgcca	cctgcgagaa	taggaggagg	atggacaacc	2340
tgaagcactc	cagagtgcac	gtggccatcc	cactgaagta	cgaggtgaag	ctgacagtgc	2400
acggctttgt	gaatccaacc	tccttcgtgt	acggctccaa	tgacgagaat	gagccagaga	2460
catgtatggt	ggagaagatg	aaactgacat	ttcacgtgat	caatacaggc	aattctatgg	2520
cccctaacgt	gagcgtggag	atcatgggtg	caaatctctt	cagccacag	acagacaagc	2580
tgtttaacat	cctggacgtg	cagacaacca	caggcgagtg	tcactttgag	aactaccaga	2640
gagtggtcgc	cctggagcag	cagaagtccg	ccatgcagac	actgaagggc	atcgtgagat	2700
ttctgagcaa	gacagataag	aggctgctgt	actgcatcaa	ggccgatccc	cactgcctga	2760
attttctgtg	caacttcggc	aagatggagt	ctggcaagga	ggcctccgtg	cacatccagc	2820
tggagggcag	accctccatc	ctggagatgg	acgagaccag	cgccctgaag	ttcgagatca	2880
gagccacagg	cttcccagag	cccaaccccc	gggtgatcga	gctgaacaag	gatgagaacg	2940
tggcccacgt	gctgctggag	ggcctgcacc	accagcgccc	caagagatat	ttcaccatcg	3000
tgatcatctc	cagctctctg	ctgctggggc	tgatcgtgct	gctgctgatc	tcctatgtga	3060
tgtggaaggc	cggtctcttt	aagcggcagt	acaagtccat	cctgcaggaa	gaaaaatcgac	3120
gcgattcatg	gtcttacatt	aattctaaat	caaacgcaga	ctaaaaatcaa	cctctggatt	3180
acaaaatttg	tgaagattg	actggtattc	ttaaactatg	tgtcctcttt	acgctatgtg	3240
gatacgtgc	tttaatgctt	ttgtatcatg	ctattgcttc	ccgtatggct	ttcattttct	3300
ctcctttgta	taaatcctgg	ttgctgtctc	tttatgagga	gtttgtggcc	gttgtcaggc	3360
aacgtggcgt	ggtgtgcact	gtgtttgctg	acgcaacccc	cactggttgg	ggcattgccca	3420
ccactctgtca	gctcctttcc	gggactttcg	ctttccccc	ccctattgcc	acggcgggaac	3480
tcacgcgcgc	ctgccttgcc	cgtgctgga	caggggctcg	gctgttgggc	actgacaatt	3540
ccgtgggtgt	gtcgggaaaa	tcacgtcctc	ttccttggct	gctgcgctgt	gttgccacct	3600
ggattctgcg	cggaacgtcc	ttctgtacg	tccttcggc	cctcaatcca	gcggaccttc	3660
cttcccgcg	cctgctgcgc	gctctgcggc	ctcttcgcgc	tccttcgctt	cgccctcaga	3720
cgagtcggat	ctccctttgg	gccgcctccc	cgcctgttaa	ttaaaaaaaa	aaaaaaaaaa	3780
aaaaaaaaaa	aaaaaaaaaa	aaaaaaaaaa	aaaaaaaaaa	aaaaaaaaaa	aaaaaaaaaa	3840
aaaaaaaaaa	aaaaaaaaaa	aaaaaaaaaa	aaaaaaaaaa	aaaaaaaaaa	aaaaaaaaaa	3898

SEQ ID NO: 46 moltype = RNA length = 3684
FEATURE Location/Qualifiers
misc_feature 1..3684
 note = KIT
source 1..3684
 mol_type = other RNA
 organism = synthetic construct

SEQUENCE: 46

taatacgact	cactataagg	actcactatt	tgttttcgcg	cccagttgca	aaaagtgtcg	60
ccaccatgag	aggcgctcgc	ggcgccgtgg	attttctctg	cgttctgctc	ctactgcttc	120
gcgtccagac	aggtctcttc	caaccatctg	tgagtcagg	ggaaccgtct	ccaccatcca	180
tcacccagg	aaaatcagac	ttaatagtc	gcgtgggcga	cgagattagg	ctgttatgca	240
ctgatccggg	ctttgtcaaa	tggacttttg	agatcctgga	tgaaccgaat	gagaataaag	300
agaatgaatg	gatcacggaa	aaggcagaag	ccaccaacac	cggcaaatac	acgtgcacca	360
acaaacacgg	cttaagcaat	tccatttatg	tgtttgttag	agatcctgcc	aagcttttcc	420
ttgttgaccg	ctccttgtat	gggaaagaag	acaacgcac	gctggtcgcg	tgtcctctca	480
cagacccaga	agtgaccaat	tattccctca	aggggtgccca	ggggaagcct	cttcccaagg	540
acttgaggtt	tattcctgac	cccaaggcgg	gcatcatgat	caaaagtgtg	aaacgcgcct	600
accatccgct	ctgtctgcac	tgttctgtgg	accaggaggg	caagtcagtg	ctgtcggaaa	660
aattcatcct	gaaagtgagg	ccagccttca	aagctgtgcc	tgttgtgtct	gtgtccaaa	720
caagctatct	tcttagggaa	ggggaagaat	tcacagtga	gtgcacaata	aaagatgtgt	780
ctagttctgt	gtactcaacg	tggaaaagag	aaaacagtca	gactaaacta	caggagaaat	840
ataatagctg	gcatacagg	gacttcaatt	atgaaagcga	ggcaacgttg	actatcagtt	900
cagcgagagt	taatgattct	ggagtgttca	tgtgttatgc	caataaact	tttgatcag	960
caaatgtcac	agcaaccttg	gaagtgtatg	ataaaggatt	cattaatatc	ttcccatga	1020
taaacactac	agtatttgta	aacgatggag	aaaatgtaga	tttgattgtt	gaatatgaag	1080
cattcccaaa	acctgaacac	cagcagtggg	tctatatgaa	cagaaccttc	actgataaat	1140
gggaagatta	tcccaagtct	gagaatgaaa	gtaatatcag	atacgtgaag	gaacttcac	1200
taacgagatt	aaaaggcacc	gaaggaggca	cttacacatt	cctagtgtcc	aattctgacg	1260
tcaatgctgc	catagcattt	aagtgttatg	tgaatacaaa	accagaaatc	ctgacttacc	1320
acaggctcgt	gaatggcatg	ctccaatgtg	tggcagcagg	attcccagag	cccacaatag	1380
attggtatct	ttgtccagga	actgagcaga	gatgctctgc	ttctgtactg	ccagtggatg	1440
tcagacactc	aaactcatct	gggcccacgt	ttggaagcgt	agtggttcag	agttctatag	1500
attctagtgc	attcaagcac	aatggcacgg	tgaatgttaa	ggcttacaac	gatgtgggca	1560

-continued

```

agactttctgc ctattttaac tttgcattta aaggttaacaa caaagagcaa atccatcccc 1620
acaccctggt cactcctttg ctgattgggt tcgtaaatcg agctggcatg atgtgcatta 1680
ttgtgatgat tctgacctac aaatatttac agaaacccat gtatgaagta cagtgggaag 1740
ttgttgagga gataaatgga aacaattatg ttacataga cccaacacaa ctcccttatg 1800
atcacaaatg ggagttttcc agaaacaggg tgagttttgg gaaaaccctg ggtgctggag 1860
ctttcgggaa ggtgtgtgag gcaactgctt atggctttaa taagtcagat gcggccatga 1920
ctgtcgctgt aaagatgctc aagccgagtg cccatttgac agaacgggaa gccctcatgt 1980
ctgaaactcaa agtcctgagt taccttggta atcacatgaa tattgtgaat ctacttgag 2040
cctgacccat tggagggccc accctgggtc ttacagaata ttgttgctat ggtgatcttt 2100
tgaatttttt gagaagaaaa cgtgattcat ttatttggtc aaagcaggaa gatcatgcag 2160
aagctgcact ttataagaat cttctgcatt caaaggagtc ttctgcagc gatagtacta 2220
atgagtacat ggacatgaaa cctggagttt cttatgttgt ccaaccaag gccgacaaaa 2280
ggagatctgt gagaataggc tcatacatag aaagagatgt gactcccgc atcatggagg 2340
atgacgagtg ttgacagact ttgagagctt ttcttaccag gtggcagaag 2400
gcatggcttt cctcgctccc aagaattgta ttcacagaga cttggcagcc agaaatatcc 2460
tccttactca tggctggatc acaagattt gtgattttgg tctagccaga gacatcaaga 2520
atgattctaa ttatgtgggt aaaggaaaac ctcgactacc tgtgaagtgg atggcacctg 2580
aaagcatttt caactgtgta tacacgtttg aaagtgcagt ctggtcctat gggatttttc 2640
tttgggagct gttctcttta ggaagcagcc cctatcctgg aatgccggtc gattctaagt 2700
tctacaagat gatcaaggaa ggcttcgga tgcctcagccc tgaacacgca cctgctgaaa 2760
tgtatgacat aatgaagact tgcctggatg cagatcccc aaaaagacca acattcaagc 2820
aaattgttca gctaattgag aagcagattt cagagagcac caatcatatt tactccaact 2880
tagcaaaactg cagccccaac cgacagaagc ccgtggtaga ccattctgtg cggatcaatt 2940
ctgtcgccag caccgcttcc tcctcccagc ctctgctgtg gcacgacgat gctgagcgg 3000
ccgctgcgat cgacaatcaa cctctggatt acaaaatttg tgaaagattg actggtattc 3060
ttaactatgt tgcctctttt acgctatgtg gatacgtgc tttaatgctt ttgtatcatg 3120
ctattgcttc ccgatggctt ttcattttct cctccttgta taaatcctgg ttgctgtctc 3180
tttatgagga gttgtggccc gttgtcaggg aacgtggcgt ggtgtgcact gtgtttgctg 3240
acgcaacccc cactggttgg ggcatgtcca ccacctgtca gctcctttcc gggactttcg 3300
ctttccccct ccctattgcc acggcggaac tcactgcgcg ctgccttgcc cgtctgtgga 3360
caggggctcg gctgttgggc actgacaatt ccgtgggtgt gtcggggaat tcactgctct 3420
ttccttgctt gctgcctgtt gttgccacct ggattctgcg cgggacgtcc ttctgctacg 3480
tcccttcgcg cctcaatcca gcggaccttc cttcccgcgg cctgctgcgg gctctgcggc 3540
ctcttcgcgg ccttcgcctt cgccctcaga cgagtcggat ctcctcttgg gccgcctccc 3600
cgcttggaat tcgagctcgt aaaaaaaaaa aaaaaaaaaa aaaaaaaaaa aaaaaaaaaa 3660
aaaaaaaaaa aaaaaaaaaa aaaa 3684

```

```

SEQ ID NO: 47      moltype = AA  length = 972
FEATURE           Location/Qualifiers
REGION            1..972
                  note = KIT
source            1..972
                  mol_type = protein
                  organism = synthetic construct

```

```

SEQUENCE: 47
MRGARGAWDF LCVLLLLLRV QTGSSQPSVS PGEPSPPSIH PGKSDLIVRV GDEIRLLCTD 60
PGFVKWTFEI LDETENKQN EWITEKAEAT NTGKYTCTNK HGLSNSIYVF VRDPAKLFLV 120
DRSLYGKEDN DTLVRCPLTD PEVTNYSLKG CQGKPLPKDL RFIIDPKAGI MIKSVKRAYH 180
RLCLHCSVDQ BGKSVLSEKF ILKVRPAFKA VPVSVSKAS YLLREGEFT VTCTIKDVSS 240
SVYSTWKREN SQTKLQEKYN SWHHGDFNYE RQATLTISSA RVNDSGVFMC YANNTFGSAN 300
VTTTLEVDK GFIFNIFPMIN TTVFVNDGEN VDLIVEYEF PKPEHQQWIY MNRTFTDKWE 360
DYPKSENEIN IRYVSELHLL RLKGTGGTGY TFLVNSDVN AAIANFVYN TKPEILTYDR 420
LVNGLMQCVA AGFPEPTIDW YFCPGTEQRC SASVLPVDVQ TLNSSGPPFG KLVVQSSIDS 480
SAFKHNGTVE CKAYNDVGKT SAYFNFAFKE QIHPHTLFTP LLIGFVIVAG MMCIIVMILT 540
YKYLQKPMYE VQWKVVEIN GNYYVIDPT QLPYDHKEWF PRNRLSFGKT LGAGAFKVV 600
EATAYGLIKS DAAMTVAVKM LKPSAHLTER EALMSELKVL SYLGNHMNIV NLLGACTIGG 660
PTLVITEYCC YGDLNLFRR KRDSFICSQ EDHAEALYK NLLHSKESSC SDSTNEYMDM 720
KPGVSYVVP KADKRRSVRI GSYIERDVTP AIMEDDELAL DLEDLSFSY QVAKGMAFLA 780
SKNCIHRDLA ARNILLTHGR ITKICDFGLA RDIKNSNYV VKGNARLPVK WMAPESIFNC 840
VYTFESDVWS YGIFLWELFS LGSSPYPGMP VDSKFYKMIK EGFRMLSPEH APAEMYDIMK 900
TCWDADPLKR PTFKQIVQLI EKQISESTNH IYSLANCSN NRQKPVVDHS VRINSVGSTA 960
SSSQPLLVDH DV 972

```

```

SEQ ID NO: 48      moltype = DNA  length = 1858
FEATURE           Location/Qualifiers
misc_feature       1..1858
                  note = CXCR4 WT
source            1..1858
                  mol_type = other DNA
                  organism = synthetic construct

```

```

SEQUENCE: 48
taatacgact cactataagg actcactatt tgttttcgcg cccagttgca aaaagtgtcg 60
ccaccatgga aggcatcagc atctacacca gcgacaacta caccgaggaa atgggcagcg 120
gcgactacga cagcatgaag gaacctgctt tccgggaaga gaacccaac ttcaacaaga 180
ttctcctgcc cacaatctac agcatcatct ttctgaccgg catcgtgggc aacggactcg 240
tgatcctcgt gatgggctac cagaaaaagc tgcggagcat gaccgacaag taccggctgc 300

```

-continued

```

acctgagcgt ggccgacctg ctgttcgtga tcacctgccc tttctggggc gtggacgccg 360
tggccaattg gtacttcggc aacttcctgt gcaaggccgt gcacgtgac tacacagtga 420
acctgtacag cagcgtgctg atcctggcct tcacagcct ggacagatac ctggccatcg 480
tgcaagccac caacagccag cggcctagaa agctgctggc cgagaagggt gtgtacgtgg 540
gcgtgtggat tccgcgcctg ctgctgacca tccccgactt catcttcgcc aacgtgtccg 600
aggccgacga ccgttacatc tgcgaccggt tctaccccaa cgacctgtgg gtggtgggtg 660
tccagttcca gcacatcatg gtgggactga tcctgcctgg catcgtgatt ctgagctgct 720
actgcatcat catcagcaag ctgagccaca gcaagggccca ccagaagcgg aaggccctga 780
aaaccaccgt gatcctgatt ctggctttct tcgctgctg gctgccctac tacatcggca 840
tcagcatcga cagcttcctc ctgctggaaa tcatcaagca gggtgctgag ttcgagaaca 900
ccgtgcacaa gtggatcagc attaccgagg ccttggcctt tttccactgc tgctgaacc 960
ctatcctgta cgccttcctg ggcgccaaat tcaagacctc tgcccagcac gccctgacca 1020
gcgtgtccag aggaagcagc ctgaagatcc tgagcaaggg caagagaggg gccacagct 1080
ccgtgtctac agagacgagc agcagcagct tccacagcag ctgaaatcaa cctctggatt 1140
acaaaatttg tgaagattg actggtattc ttaactatgt tgctcctttt acgctatgtg 1200
gatacgtgct ttaaatgctt ttgtatcatg ctattgcttc ccgtatggct ttcattttct 1260
cctccttgta taaatcctgg ttgctgtctc tttatgagga gttgtggccc gttgtcaggc 1320
aacgtggcgt ggtgtgctac gtgtttgctg acgcaacccc cactgggtgg gccattgcca 1380
ccacctgtca gctcctttcc gggactttcg ctttccccct ccctattgcc acggcggaac 1440
tcacgcgcgc ctgccttgcc cgtgctgcta caggggctcg gctgttgggc actgacaatt 1500
ccgtgggtgt gtccgggaaa tcacgtcctc ttccttggtc gctcgctgtg gttgccacct 1560
ggattctcgc cgggacgtcc ttctgctacg tcccttcggc cctcaatcca gcggaccttc 1620
cttcccgccg cctgctgcgc gctctgcggc ctcttcgcgc tcttcgcctt cgcctcaga 1680
cgagtcggat ctccctttgg gccgcctccc cgctgttaa ttaaaaaaaa aaaaaaaa 1740
aaaaaaaaaa aaaaaaaaaa aaaaaaaaaa aaaaaaaaaa aaaaaaaaaa aaaaaaaa 1800
aaaaaaaaaa aaaaaaaaaa aaaaaaaaaa aaaaaaaaaa aaaaaaaaaa aaaaaaaa 1858

```

```

SEQ ID NO: 49      moltype = DNA length = 1858
FEATURE           Location/Qualifiers
misc_feature       1..1858
                  note = CXCR4 V160L
source            1..1858
                  mol_type = other DNA
                  organism = synthetic construct

```

```

SEQUENCE: 49
taatacgact cactataagg actcactatt tgttttcgcg cccagttgca aaaagtgtcg 60
ccaccatgga aggcatacagc atctacacca gcgacaacta caccgaggaa atgggcagcg 120
gcgactacga cagcatgaagc gaaccctgct tccgggaaga gaacgcacaa ttcaacaaga 180
cttctcctgc cacaatctac agcatcatct tctgaccggc catcgtgggc aacggactcg 240
tgatcctcgt gatgggtacg cagaaaaaagc tgccgagcat gaccgacaag taccggctgc 300
acctgagcgt ggccgacctg ctgttcgtga tcacctgccc tttctggggc gtggacgccg 360
tggccaattg gtaacttcggc aacttcctgt gcaaggccgt gcacgtgac tacacagtga 420
acctgtacag cagcgtgctg atcctggcct tcacagcct ggacagatac ctggccatcg 480
tgcaagccac caacagccag cggcctagaa agctgctggc cgagaagggt gtgtacgtgg 540
gcctgtggat tccgcgcctg ctgctgacca tccccgactt catcttcgcc aacgtgtccg 600
aggccgacga ccgttacatc tgcgaccggt tctaccccaa cgacctgtgg gtggtgggtg 660
tccagttcca gcacatcatg gtgggactga tcctgcctgg catcgtgatt ctgagctgct 720
actgcatcat catcagcaag ctgagccaca gcaagggccca ccagaagcgg aaggccctga 780
aaaccaccgt gatcctgatt ctggctttct tcgctgctg gctgccctac tacatcggca 840
tcagcatcga cagcttcctc ctgctggaaa tcatcaagca gggtgctgag ttcgagaaca 900
ccgtgcacaa gtggatcagc attaccgagg ccttggcctt tttccactgc tgctgaacc 960
ctatcctgta cgccttcctg ggcgccaaat tcaagacctc tgcccagcac gccctgacca 1020
gcgtgtccag aggaagcagc ctgaagatcc tgagcaaggg caagagaggg gccacagct 1080
ccgtgtctac agagagcgag agcagcagct tccacagcag ctgaaatcaa cctctggatt 1140
acaaaatttg tgaagattg actggtattc ttaactatgt tgctcctttt acgctatgtg 1200
gatacgtgct ttaaatgctt ttgtatcatg ctattgcttc ccgtatggct ttcattttct 1260
cctccttgta taaatcctgg ttgctgtctc tttatgagga gttgtggccc gttgtcaggc 1320
aacgtggcgt ggtgtgctac gtgtttgctg acgcaacccc cactgggtgg gccattgcca 1380
ccacctgtca gctcctttcc gggactttcg ctttccccct ccctattgcc acggcggaac 1440
tcacgcgcgc ctgccttgcc cgtgctgcta caggggctcg gctgttgggc actgacaatt 1500
ccgtgggtgt gtccgggaaa tcacgtcctc ttccttggtc gctcgctgtg gttgccacct 1560
ggattctcgc cgggacgtcc ttctgctacg tcccttcggc cctcaatcca gcggaccttc 1620
cttcccgccg cctgctgcgc gctctgcggc ctcttcgcgc tcttcgcctt cgcctcaga 1680
cgagtcggat ctccctttgg gccgcctccc cgctgttaa ttaaaaaaaa aaaaaaaa 1740
aaaaaaaaaa aaaaaaaaaa aaaaaaaaaa aaaaaaaaaa aaaaaaaaaa aaaaaaaa 1800
aaaaaaaaaa aaaaaaaaaa aaaaaaaaaa aaaaaaaaaa aaaaaaaaaa aaaaaaaa 1858

```

```

SEQ ID NO: 50      moltype = DNA length = 1858
FEATURE           Location/Qualifiers
misc_feature       1..1858
                  note = CXCR4 A175F
source            1..1858
                  mol_type = other DNA
                  organism = synthetic construct

```

```

SEQUENCE: 50
taatacgact cactataagg actcactatt tgttttcgcg cccagttgca aaaagtgtcg 60

```

-continued

```

ccaccatgga aggcacgagc atctacacca gcgacaacta caccgaggaa atgggcagcg 120
gcgactacga cagcatgaag gaaccctgct tccgggaaga gaacgccaac ttcaacaaga 180
tcttcctgcc cacaatctac agcatcatct ttctgaccgg catcgtgggc aacggactcg 240
tgatcctcgt gatgggctac cagaaaaagc tgcggagcat gaccgacaag tacgggctgc 300
acctgagcgt ggcgcacctg ctgttcgtga tcacctgcc tttctgggcc gtggacgccg 360
tggccaattg gtacttcggc aacttcctgt gcaaggccgt gcacgtgac tacacagtga 420
acctgtacag cagcgtgctg atcctggcct tcacagcct ggacagatac ctggccatcg 480
tgcacgccac caacagccag cggcctagaa agctgctggc cgagaagggt gtgtacgtgg 540
gggtgtggat tccgcctctg ctgctgacca tcccgcactt catcttcttc aacgtgtccg 600
aggccgacga ccggtacatc tgcgaccggg tctaccccaa cgacctgtgg gtggtggtgt 660
tccagttcca gcacatcatg gtgggactga tccctgctgg catcgtgatt ctgagctgct 720
actgcatcat catcagcaag ctgagccaca gcaagggccca ccagaagcgg aaggccctga 780
aaaccaccgt gatcctgatt ctggctttct tcgctgctg gctgccctac tacatcgga 840
tcagcatcga cagcttcac tcgtctggaa tcatcaagca gggctgcgag ttcgagaaca 900
ccgtgcacaa gtggatcagc attaccgagg ccttggcctt tttccactgc tgcctgaacc 960
ctatcctgta cgccttcctg ggcgcgaagt tcaagacctc tgcccagcac gccctgacca 1020
gcgtgtccag aggaagcagc ctgaagatcc tgagcaaggc caagagaggc ggccacagct 1080
ccgtgtctac agagagcgag agcagcagct tccacagcag ctgaaatcaa cctctggatt 1140
acaaaatttg tgaagattg actggtattc ttaactatgt tgctcctttt acgctatgtg 1200
gatacgtgc tttaatgctt ttgtatcatg ctattgtctt ccgtatggct ttcattttct 1260
cctccttgta taaatcctgg ttgctgtctc tttatgagga gttgtggccc gttgtcaggc 1320
aacgtggcgt ggtgtgcact gtgtttgctg acgcaacccc cactggttgg ggcattgcca 1380
ccacctgtca gctcctttcc gggactttcg ctttccccct ccctattgcc acggcggaac 1440
tcacgcgcgc ctgccttgcc cgctgctgga caggggctcg gctgttgggc actgacaatt 1500
ccgtggtgtt gtcggggaaa tcacgtcctt ttcttggct gctcgctgt gttgccacct 1560
ggattctgcg cgggacgtcc ttctgtacg tcccttcggc cctcaatcca gcggaccttc 1620
cttcccgcgg cctgctgcgc gctctgcggc ctcttcgcgc tcttcgcctt cgcctcaga 1680
cgagtcggat ctccctttgg gccgcctccc cgctgttaa ttaaaaaaaaa aaaaaaaaaa 1740
aaaaaaaaaa aaaaaaaaaa aaaaaaaaaa aaaaaaaaaa aaaaaaaaaa aaaaaaaaaa 1800
aaaaaaaaaa aaaaaaaaaa aaaaaaaaaa aaaaaaaaaa aaaaaaaaaa aaaaaaaaaa 1858

```

```

SEQ ID NO: 51      moltype = DNA length = 1858
FEATURE           Location/Qualifiers
misc_feature       1..1858
                  note = CXCR4 Q200A
source            1..1858
                  mol_type = other DNA
                  organism = synthetic construct

```

```

SEQUENCE: 51
taatacgaact cactataagg actcactatt tgttttcgcg cccagttgca aaaagtgtcg 60
ccaccatgga aggcacgagc atctacacca gcgacaacta caccgaggaa atgggcagcg 120
gcgactacga cagcatgaag gaaccctgct tccgggaaga gaacgccaac ttcaacaaga 180
tcttcctgcc cacaatctac agcatcatct ttctgaccgg catcgtgggc aacggactcg 240
tgatcctcgt gatgggctac cagaaaaagc tgcggagcat gaccgacaag tacgggctgc 300
acctgagcgt ggcgcacctg ctgttcgtga tcacctgcc tttctgggcc gtggacgccg 360
tggccaattg gtacttcggc aacttcctgt gcaaggccgt gcacgtgac tacacagtga 420
acctgtacag cagcgtgctg atcctggcct tcacagcct ggacagatac ctggccatcg 480
tgcacgccac caacagccag cggcctagaa agctgctggc cgagaagggt gtgtacgtgg 540
gggtgtggat tccgcctctg ctgctgacca tcccgcactt catcttcgcc aacgtgtccg 600
aggccgacga ccggtacatc tgcgaccggg tctaccccaa cgacctgtgg gtggtggtgt 660
tcgctgtcca gcacatcatg gtgggactga tccctgctgg catcgtgatt ctgagctgct 720
actgcatcat catcagcaag ctgagccaca gcaagggccca ccagaagcgg aaggccctga 780
aaaccaccgt gatcctgatt ctggctttct tcgctgctg gctgccctac tacatcgga 840
tcagcatcga cagcttcac tcgtctggaa tcatcaagca gggctgcgag ttcgagaaca 900
ccgtgcacaa gtggatcagc attaccgagg ccttggcctt tttccactgc tgcctgaacc 960
ctatcctgta cgccttcctg ggcgcgaagt tcaagacctc tgcccagcac gccctgacca 1020
gcgtgtccag aggaagcagc ctgaagatcc tgagcaaggc caagagaggc ggccacagct 1080
ccgtgtctac agagagcgag agcagcagct tccacagcag ctgaaatcaa cctctggatt 1140
acaaaatttg tgaagattg actggtattc ttaactatgt tgctcctttt acgctatgtg 1200
gatacgtgc tttaatgctt ttgtatcatg ctattgtctt ccgtatggct ttcattttct 1260
cctccttgta taaatcctgg ttgctgtctc tttatgagga gttgtggccc gttgtcaggc 1320
aacgtggcgt ggtgtgcact gtgtttgctg acgcaacccc cactggttgg ggcattgcca 1380
ccacctgtca gctcctttcc gggactttcg ctttccccct ccctattgcc acggcggaac 1440
tcacgcgcgc ctgccttgcc cgctgctgga caggggctcg gctgttgggc actgacaatt 1500
ccgtggtgtt gtcggggaaa tcacgtcctt ttcttggct gctcgctgt gttgccacct 1560
ggattctgcg cgggacgtcc ttctgtacg tcccttcggc cctcaatcca gcggaccttc 1620
cttcccgcgg cctgctgcgc gctctgcggc ctcttcgcgc tcttcgcctt cgcctcaga 1680
cgagtcggat ctccctttgg gccgcctccc cgctgttaa ttaaaaaaaaa aaaaaaaaaa 1740
aaaaaaaaaa aaaaaaaaaa aaaaaaaaaa aaaaaaaaaa aaaaaaaaaa aaaaaaaaaa 1800
aaaaaaaaaa aaaaaaaaaa aaaaaaaaaa aaaaaaaaaa aaaaaaaaaa aaaaaaaaaa 1858

```

```

SEQ ID NO: 52      moltype = DNA length = 1858
FEATURE           Location/Qualifiers
misc_feature       1..1858
                  note = CXCR4 D262N
source            1..1858

```

-continued

mol_type = other DNA
organism = synthetic construct

SEQUENCE: 52

taatacgact	cactataagg	actcactatt	tggttttcg	cccagttgca	aaaagtgtcg	60
ccaccatgga	aggcatcagc	atctacacca	gcgacaacta	caccgaggaa	atgggcagcg	120
gcgactacga	cagcatgaag	gaacctctgt	tccgggaaga	gaacgccaac	ttcaacaaga	180
tcttcctgcc	cacaatctac	agcatcatct	ttctgaccgg	catcgtgggc	aacggactcg	240
tgatcctcgt	gatgggctac	cagaaaaaag	tcgggagcat	gaccgacaag	taccggctgc	300
acctgagcgt	ggcgcacctg	ctgttcgtga	tcacctgcc	tttctgggcc	gtggacgccc	360
tggccaattg	gtacttcggc	aacttcctgt	gcaaggccgt	gcacgtgac	tacacagtga	420
acctgtacag	cagcgtgctg	atcctggcct	tcacagcct	ggacagatac	ctggccatcg	480
tgacgcccac	caacagccag	cggcctagaa	agctgctggc	cgagaagggtg	gtgtacgtgg	540
gcgtgtggat	tcccgccctg	ctgctgacca	tccccgactt	catcttcgcc	aacgtgtccg	600
agggcgacga	cgggtacatc	tcgcgaccgt	tctaccccaa	cgacctgtgg	gtgggtgggtg	660
tccagttcca	gcacatcatg	gtgggactga	tccctgctgg	catcgtgatt	ctgagctgct	720
actgcatcat	catcagcaag	ctgagccaca	gcaagggccca	ccagaagcgg	aaggccctga	780
aaaccacgtg	gatcctgatt	ctggctttct	tcgcctgctg	gctgccctac	tacatcgcca	840
tcagcatcaa	cagcttcac	ctgctggaaa	tcataagca	gggctgcgag	ttcgagaaca	900
ccgtgcacaa	gtggatcagc	attaccgagg	ccctggcctt	tttccactgc	tgccctgaacc	960
ctatcctgta	cgccttcctg	ggcgccaaagt	tcaagacctc	tgcccagcac	gccctgacca	1020
gcgtgtccag	aggaagcagc	ctgaagatcc	tgagcaaggg	caagagaggg	ggccacagct	1080
ccgtgtctac	agagagcgag	agcagcagct	tccacagcag	ctgaaatcaa	cctctggatt	1140
acaaaatttg	tgaagatttg	actggtattc	ttaactatgt	tgctcctttt	acgctatgtg	1200
gatacgctgc	tttaatgcct	ttgtatcatg	ctattgcttc	ccgtatggct	ttcattttct	1260
ctccttgta	taaatcctgg	ttgtgtctc	tttatgagga	gttgtggccc	gttgtcaggc	1320
aacgtggcgt	gggtgtgact	gtgtttgctg	acgcaacccc	cactgggttg	ggcattgccca	1380
ccacctgtca	gctcctttcc	gggactttcg	ctttccccct	ccctattgcc	acggcggaac	1440
tcacgcgcgc	ctgccttgcc	cgctgctgga	caggggctcg	gctgttgggc	actgacaatt	1500
ccgtgggtgt	gtcggggaaa	tcacgtcct	ttccttggct	gctcgctgtg	gttgccacct	1560
ggattctcgc	cgggacgtcc	ttctgtctac	tccttcgggc	cctcaatcca	gcggaccttc	1620
cttcocgcgc	ctcgtgcgc	gctctgcggc	ctcttcgcgc	ttctgcctt	cgccctcaga	1680
cgagtcggat	ctccttttgg	gcgcctccc	cgctgttaa	ttaaaaaaaa	aaaaaaaaaa	1740
aaaaaaaaaa	aaaaaaaaaa	aaaaaaaaaa	aaaaaaaaaa	aaaaaaaaaa	aaaaaaaaaa	1800
aaaaaaaaaa	aaaaaaaaaa	aaaaaaaaaa	aaaaaaaaaa	aaaaaaaaaa	aaaaaaaaaa	1858

SEQ ID NO: 53 moltype = DNA length = 1858
FEATURE Location/Qualifiers
misc_feature 1..1858
 note = CXCR4 H281A
source 1..1858
 mol_type = other DNA
 organism = synthetic construct

SEQUENCE: 53

taatacgact	cactataagg	actcactatt	tggttttcg	cccagttgca	aaaagtgtcg	60
ccaccatgga	aggcatcagc	atctacacca	gcgacaacta	caccgaggaa	atgggcagcg	120
gcgactacga	cagcatgaag	gaacctctgt	tccgggaaga	gaacgccaac	ttcaacaaga	180
tcttcctgcc	cacaatctac	agcatcatct	ttctgaccgg	catcgtgggc	aacggactcg	240
tgatcctcgt	gatgggctac	cagaaaaaag	tcgggagcat	gaccgacaag	taccggctgc	300
acctgagcgt	ggcgcacctg	ctgttcgtga	tcacctgcc	tttctgggcc	gtggacgccc	360
tggccaattg	gtacttcggc	aacttcctgt	gcaaggccgt	gcacgtgac	tacacagtga	420
acctgtacag	cagcgtgctg	atcctggcct	tcacagcct	ggacagatac	ctggccatcg	480
tgacgcccac	caacagccag	cggcctagaa	agctgctggc	cgagaagggtg	gtgtacgtgg	540
gcgtgtggat	tcccgccctg	ctgctgacca	tccccgactt	catcttcgcc	aacgtgtccg	600
agggcgacga	cgggtacatc	tcgcgaccgt	tctaccccaa	cgacctgtgg	gtgggtgggtg	660
tccagttcca	gcacatcatg	gtgggactga	tccctgctgg	catcgtgatt	ctgagctgct	720
actgcatcat	catcagcaag	ctgagccaca	gcaagggccca	ccagaagcgg	aaggccctga	780
aaaccacgtg	gatcctgatt	ctggctttct	tcgcctgctg	gctgccctac	tacatcgcca	840
tcagcatcaa	cagcttcac	ctgctggaaa	tcataagca	gggctgcgag	ttcgagaaca	900
ccgtggccaa	gtggatcagc	attaccgagg	ccctggcctt	tttccactgc	tgccctgaacc	960
ctatcctgta	cgccttcctg	ggcgccaaagt	tcaagacctc	tgcccagcac	gccctgacca	1020
gcgtgtccag	aggaagcagc	ctgaagatcc	tgagcaaggg	caagagaggg	ggccacagct	1080
ccgtgtctac	agagagcgag	agcagcagct	tccacagcag	ctgaaatcaa	cctctggatt	1140
acaaaatttg	tgaagatttg	actggtattc	ttaactatgt	tgctcctttt	acgctatgtg	1200
gatacgctgc	tttaatgcct	ttgtatcatg	ctattgcttc	ccgtatggct	ttcattttct	1260
ctccttgta	taaatcctgg	ttgtgtctc	tttatgagga	gttgtggccc	gttgtcaggc	1320
aacgtggcgt	gggtgtgact	gtgtttgctg	acgcaacccc	cactgggttg	ggcattgccca	1380
ccacctgtca	gctcctttcc	gggactttcg	ctttccccct	ccctattgcc	acggcggaac	1440
tcacgcgcgc	ctgccttgcc	cgctgctgga	caggggctcg	gctgttgggc	actgacaatt	1500
ccgtgggtgt	gtcggggaaa	tcacgtcct	ttccttggct	gctcgctgtg	gttgccacct	1560
ggattctcgc	cgggacgtcc	ttctgtctac	tccttcgggc	cctcaatcca	gcggaccttc	1620
cttcocgcgc	ctcgtgcgc	gctctgcggc	ctcttcgcgc	ttctgcctt	cgccctcaga	1680
cgagtcggat	ctccttttgg	gcgcctccc	cgctgttaa	ttaaaaaaaa	aaaaaaaaaa	1740
aaaaaaaaaa	aaaaaaaaaa	aaaaaaaaaa	aaaaaaaaaa	aaaaaaaaaa	aaaaaaaaaa	1800
aaaaaaaaaa	aaaaaaaaaa	aaaaaaaaaa	aaaaaaaaaa	aaaaaaaaaa	aaaaaaaaaa	1858

SEQ ID NO: 54 moltype = DNA length = 3898

-continued

FEATURE	Location/Qualifiers
misc_feature	1..3898
	note = ITGA4
source	1..3898
	mol_type = other DNA
	organism = synthetic construct

SEQUENCE: 54

taatacgact	cactataagg	actcactatt	tgttttcg	cccagttgca	aaaagtgtcg	60
ccaccatggc	ttgggaggct	cggagagaac	ctggacctag	aagagctgcc	gtgcgggaga	120
ctgtcatgct	gctgctgtgc	ctgggggtgc	ccacaggcag	accttacaac	gtggataccg	180
agagcgccct	gctgtatcag	ggccccaca	acacctgtt	tggctactct	gtgggtgctgc	240
acagccacgg	cgccaaccgc	tggctgctgg	tgggcgcccc	caccgccaat	tggctggcca	300
atgctccgt	gatcaaccca	ggcgccatct	acagatgtcg	gatcggaag	aatcctggcc	360
agacatgcga	gcagctgcag	ctgggctccc	ccaacggcga	gccttggtgc	aagacatgcc	420
tggaggagag	ggacaatcag	tggctgggcg	tgacactgag	cagacagccc	ggcgagaacg	480
gctccatcgt	gacatgcggc	cacagatgga	agaacatctt	ttacatcaag	aacgagaata	540
agctgccaac	aggcggtctg	tatggcgctgc	ccccagacct	gagaacagag	ctgagcaagc	600
ggatcgcccc	atgctaccag	gattatgtga	agaagtgttg	cgagaatttt	gcctcttgcc	660
aggcgggcat	ctcctctctc	tacaccaagg	atctgatcgt	gatggggcgcc	cctggctctt	720
cctattggac	aggctctctg	ttcgtgtata	atatacacaac	caacaagtac	aaggccttcc	780
tggacaagca	gaaccagggtg	aagttcggct	cctatctggg	ctacagcggtg	ggcgccggcc	840
acttttcggtc	tcagccaccc	acagaggtgg	tgggcggcgc	ccccagcac	gagcagatcg	900
gcaaggccta	catcttctcc	atcgacgaga	aggagctgaa	tatcctgcac	gagatgaagg	960
gcaagaagct	gggtctctac	tttggcgcc	ccgtgtgcgc	cgtaggacctg	aatgccgacg	1020
gcttttcgga	ctcgtggtg	ggcgccccaa	tgcagtcac	aatcagagag	gagggcagag	1080
tgctcgtgta	tatacaattcc	ggcagcggtg	ccgtgatgaa	tgccatggag	accaatctgg	1140
tgggtccgga	caagtatgcc	gccagattcg	gcgagagcat	cgtagaatctg	ggcgacatcg	1200
acaacgatgg	cttcgaggac	gtggccatcg	gcgccccaca	ggaggatgac	ctgcaggggc	1260
ccatctatat	ctataaccgc	cgggcccagc	gcattctctag	cacctctctc	cagagaatcg	1320
agggcctgca	ctcagcaag	tcctctgagca	tgttcggcca	gagcatctcc	ggccagatcg	1380
acgccgataa	taacgggtac	gtggatgtgg	ccgtgggcgc	ctttagaagc	gactccgccc	1440
tgctgctgag	aaacaggccc	gtggatgctc	cctgtctcac	cccgagtcg	cccgagtcg	1500
tgaatcggac	aaagtgtgac	tgcgtggaga	atggctggcc	aagcgtgtgc	atcgatctga	1560
cactgtgctt	ttcctataag	ggcaaggagg	tgccaggcta	tatcgtgctg	ttttacaaca	1620
tgctctctga	tgtgaacaga	aaggccgagt	cccccccaag	attctacttt	tcctctaacg	1680
gcacctctga	tgtgatcacc	ggctctatcc	agggtgccag	caggggaggcc	aattgcagaa	1740
cccaccaggc	cttatcgccg	aaggatgtgc	gcgacatcct	gaccccaatc	cagatcgagg	1800
ccgctatata	cctggggccc	cacgtgatct	ccaagcggtc	caccgaggag	ttccctccac	1860
tgcagccaat	cctgcagcag	aagaaggaga	aggacatcat	gaagaagaca	atcaactctg	1920
ccaggttttg	cgcccccagc	aactgttccg	ccgacctgca	ggtgtctgcc	aagatcggtc	1980
tcctgaagcc	ccacgagaac	aagacataac	tggccgtggg	ctccatgaag	accctgatgc	2040
tgaacgtgag	cctgtttaac	gcccgcgacg	atgcctacga	gacaacactg	cacgtgaagc	2100
tcgacgtggg	cctgtacttc	atcaagatcc	tggagctgga	ggagaagcag	atcaactgtg	2160
agggtgaccga	taactccggc	gtgggtgcagc	tggattgcag	catcggttat	atctacgtgg	2220
accacctgtc	ccgcatcgac	atctcttttc	tgtctggcgt	gtccagcctg	tcctggggcg	2280
aggaggacct	gtccatcaca	gtgcacgcca	cctgcgagaa	tgaggaggag	atggacaacc	2340
tgaagcactc	cagagtgcga	gtggccatcc	cactgaagta	cgagggtgaag	ctgacagtgc	2400
acggctttgt	gaatcccaac	tcctctgtgt	acggctccaa	tgacgagaat	gagccagaga	2460
catgtatggt	ggagaagatg	aacctgacat	ttcactgtat	caatacaggc	aattctatgg	2520
cccctaactg	gagcgtggag	atcatgggtgc	caaattcttt	cagcccacag	acagacaagc	2580
tgtttaacat	cctggagcgtg	cagacaacca	caggcgagtg	tcactttgag	aactaccaga	2640
gagtggtggc	cctggagcag	cagaagtccg	ccatgcagac	actgaagggc	atcgtgagat	2700
ttctgagcaa	gacagataag	aggctgctgt	actgcataca	ggccgatccc	cactgctctg	2760
attttctgtg	caacttcggc	aagatggagt	ctggcaaggga	ggcctccgtg	ccatccagc	2820
tggagggcag	accttcacac	ctggagatgg	acgagaccag	cgccctgaag	ttcgagatca	2880
gagccacagg	cttcccagag	cccaaccccc	gggtgatcga	gctgaacaag	gatgagaacg	2940
tggcccacgt	gctgctggag	ggcctgcacc	accagcgccc	caagagatat	ttccacctcg	3000
tgatcatctc	cagctctctg	ctgctgggccc	tgatcgtgct	gctgctgac	tcctatgtga	3060
tgtaggaagg	cggtctcttt	aagcggcagt	acaagtccat	cctgcaggaa	gaaaaatcgac	3120
gcgattcatg	gtctttacatt	aattctaaat	caaacgacga	ctaaaatcaa	cctctggatt	3180
acaaaatttg	tgaagaattg	actggatttc	ttactatgt	tgctcctttt	acgctatgtg	3240
gatacgctgc	tttaattgct	ttgtatcatg	ctattgcttc	ccgtatgggt	ttcattttct	3300
cctccttgta	taaatcctgg	ttgctgtctc	tttatgagga	gttggtggcc	gttgctcaggc	3360
aacgtggcgt	gggtgtgcat	gtgtttgtctg	acgcaacccc	cactggttgg	ggcattgcca	3420
ccactgttca	gctcctttcc	gggactttcg	ctttccccct	ccctattggc	acggcggaac	3480
tcacgcgcgc	ctgccttgcc	cgctgctgga	caggggctcg	gctgttgggc	actgacaatt	3540
ccgtgggtgt	gtcggggaaa	tcacgtctct	ttccttggtc	gctcgctgtg	gttgccacct	3600
ggattctgcg	cgggacgtcc	ttctgtctacg	tccttcggcg	cctcaatcca	gcggaccttc	3660
cttcccgcgg	cctgctgcgc	gctctgcggc	ctcttcgcgc	ttctgcgctt	cgccctcaga	3720
cgagtcggat	ctccctttgg	gccgcctccc	cgctgtgtaa	ttaaaaaaaa	aaaaaaaaaa	3780
aaaaaaaaaa	aaaaaaaaaa	aaaaaaaaaa	aaaaaaaaaa	aaaaaaaaaa	aaaaaaaaaa	3840
aaaaaaaaaa	aaaaaaaaaa	aaaaaaaaaa	aaaaaaaaaa	aaaaaaaaaa	aaaaaaaaaa	3898

SEQ ID NO: 55 moltype = DNA length = 3684
 FEATURE Location/Qualifiers
 misc_feature 1..3684

-continued

```

note = KIT
source      1..3684
mol_type = other DNA
organism = synthetic construct

SEQUENCE: 55
taatacgact cactataagg actcactatt tgttttcgcg cccagttgca aaaagtgtcg 60
ccaccatgag aggcgctcgc ggcgcctggg attttctctg cgttctgtct ctactgcttc 120
gcgtccagac aggcctcttc caaccatctg tgagtcacgg ggaaccgtct ccaccatcca 180
tccatccagg aaaatccagc ttaatagtcc gcgtgggcga cgagattagg ctgttatgca 240
ctgatccggg ctttgtcaaa tggacttttg agatcctgga tgaaacgaat gagaataagc 300
agaatgaatg gatcacggaa aaggcagaag ccaccaacac cggcaaatac acgtgcacca 360
acaaacacgg cttaaagcaat tccatttatg tgtttgttag agatcctgcc aagcttttcc 420
ttgttgaccg ctcttgatat gggaaagaag acaacgacac gctggtcgcg tgcctctca 480
cagacccaga agtgaccaat tattccctca aggggtgcca ggggaagcct cttcccaagg 540
acttgagggtt tattcctgac cccaaggcgg gcatcatgat caaaagtgtg aaacgcgcct 600
accatcggtc ctgtctgcat tgttctgttg accaggaggg caagtcatgt ctgtcggaaa 660
aattcatcct gaaagtgagg ccagccttca aagctgtgcc tgttgtgtct gtgtccaaag 720
caagctatct tcttagggaa ggggaagaat tcacagtga cgtgcacaata aaagatgtgt 780
ctagttctgt gtaactcaac tggaaaagag aaaacagtca gactaaacta caggagaaat 840
ataatagctg gcatcacggt gacttcaatt atgaacgtca ggcaacgttg actatcagtt 900
cagcgagagt taatgattct ggagtgttca tgtgttatgc caataaact tttggatcag 960
caaatgtcac acaaaccttg gaagtagtag ataaaggatt cattaatctc ttccccatga 1020
taaacactac agtatttgtg aacgatggag aaaatgtaga tttgattgtt gaatatgaag 1080
cattcccaa acctgaacac cagcagtgga tctatatgaa cagaaccttc actgataaat 1140
gggaagatta tcccaagtcg gagaatgaaa gtaatatcag atacgtaagt gaactctatc 1200
taacgagatt aaaaggcacc gaaggagcca cttacacatt cctagtgtcc aattctgacg 1260
tcaatgctgc catagcattt aatgtttatg tgaatacaaa accgaaatc ctgacttacg 1320
acaggctcgt gaatggcatg ctccaatgtg tggcagcagg attcccagag cccacaatag 1380
atttgtattt ttgtccagga actgagcaga gatgctctgc ttctgtactg ccagtggtatg 1440
tgcagacact aaactcatct gggccaccgt ttggaaagct agtgggtcag agttctatag 1500
attctagtgc attcaagcac aatggcacgg ttgaatgtaa ggcttacaac gatgtggggc 1560
agacttctgc ctattttaac ttgtcattta aaggttaacaa caaagagcaa atccatcccc 1620
acaccctggt cactcctttg ctgatttggt tcgtaatcgt agctggcatg atgtgcatta 1680
ttgtgatgat ttgtacgtac aaatatttac agaaacccat gtatgaagta cagtgggaagg 1740
ttgttgagga gataaatgga aacaattatg tttacataga cccaacacaa cttccttatg 1800
atcacaaatg ggagtttccc agaaccaggc tgagtttttg gaaaacctgc ggtgctggag 1860
ctttcgggaa ggttgttgag gcaactgctt atggcttaat taagtcatag gcggccatga 1920
ctgtcgctgt aaagatgtct aagccgagtg cccatttgac agaaccggga gccctcatgt 1980
ctgaactcaa agtctgagtg taccttggtg atcacatgaa tattgtgaat ctacttgagg 2040
cctgcaccaa tggagggccc accctgggtc ttacagaata ttgttgctat ggtgatcttt 2100
tgaatttttt gagaagaaaa cgtgattcat ttatttgttc aaagcaggaa gatcatgcag 2160
aagctgcact ttataaagaa cttctgcatt caaaggagtc ttctgcagc gatagtaacta 2220
atgagtacat ggacatgaaa cctggagttt cttatgttgt ccaaccaaag gccgacaaaa 2280
ggagatctgt gagaataggg tcatacatag aaagagatgt gactcccgcc atcatggagg 2340
atgacgaggt ggccctagac ttagaagact tgcgtagctt ttcttaccag gtggcaagg 2400
gcattggctt cctcgctccc aagaattgta ttacacagaga cttggcagcc agaaatatcc 2460
tccctactca tggtcggatc acaaagattt gtgatttttg tctagccaga gacatcaaga 2520
atgattctaa ttatgtggtt aaaggaaacg ctgcactacc tgtgaagtgg atggcacctg 2580
aaagcatttt caactgtgta tacacgtttg aaagtgcagt ctggtcctat gggatttttc 2640
tttgggagct gttctcttta ggaagcagcc cctatcctgg aatgccggtc gattctaaagt 2700
tctacaagat gatcaaggaa ggcttcggga tgcctagccc tgaacacgca cctgctgaaa 2760
tgtatgacat aatgaagact tgctgggatg cagatccctc aaaaagacca acattcaagc 2820
aaattgttca gctaattgag aagcagattt cagagagcac caatcatatt tactccaact 2880
tagcaaaactg cagccccaac cgacagaagc ccgtggtaga ccattctgtg cggatcaatt 2940
ctgtcggcag caccgcttcc tctcccagc ctctgcttgt gcacgacgat gctgagcgg 3000
ccgcgtcgat cgacaatcaa cctctggatt acaaaatttg tgaaagattg actggtattc 3060
ttaactatgt tgctcctttt acgctatgtg gatacgtgc tttaatgcct ttgtatcatg 3120
ctattgcttc ccgtatggat ttcattttct cctccttgta taaatcctgg ttgctgtctc 3180
tttatgagga gttgtggccc gttgtcaggg aacgtggcgt ggtgtgcact gtgtttgctg 3240
acgcaacccc cactgggttg ggcattgcca ccacctgtca gctcctttcc gggactttcg 3300
ctttcccccct cctcattgcc acggcggaac tcacgcgcgc ctgccttgcc cgtgctgga 3360
cagggggtcgc gctgttgggc actgacaatt ccgtgggtgt gtcggggaaa tcactgtcct 3420
ttccttggtc gctcgctgtg gttgcacact ggattctgcg cgggacgtcc ttctgtacg 3480
tcccttcggc cctcaatcca gcggaccttc cttcccgcgg cctgctgccg gctctgcggc 3540
ctcttcgcgc tcttcgctct cgccctcaga cgagtgggat ctccctttgg gccgcctccc 3600
cgcttggaat tcgagctcgt aaaaaaaaaa aaaaaaaaaa aaaaaaaaaa aaaaaaaaaa 3660
aaaaaaaaaa aaaaaaaaaa aaaa 3684

```

```

SEQ ID NO: 56      moltype = DNA length = 41
FEATURE            Location/Qualifiers
misc_feature       1..41
                    note = aptamer
source             1..41
                    mol_type = other DNA
                    organism = synthetic construct

SEQUENCE: 56

```

-continued

gactcactat ttgttttcgc gccagttgc aaaaagtgtc g	41
SEQ ID NO: 57	moltype = DNA length = 18
FEATURE	Location/Qualifiers
misc_feature	1..18
	note = HIV sense
source	1..18
	mol_type = other DNA
	organism = synthetic construct
SEQUENCE: 57	
tactgacgct ctcgcacc	18
SEQ ID NO: 58	moltype = DNA length = 17
FEATURE	Location/Qualifiers
misc_feature	1..17
	note = HIV antisense
source	1..17
	mol_type = other DNA
	organism = synthetic construct
SEQUENCE: 58	
tctcgacgca ggactcg	17
SEQ ID NO: 59	moltype = DNA length = 20
FEATURE	Location/Qualifiers
misc_feature	1..20
	note = Probe
source	1..20
	mol_type = other DNA
	organism = synthetic construct
SEQUENCE: 59	
atctctctcc ttctagcctc	20
SEQ ID NO: 60	moltype = DNA length = 18
FEATURE	Location/Qualifiers
misc_feature	1..18
	note = Telo sense
source	1..18
	mol_type = other DNA
	organism = synthetic construct
SEQUENCE: 60	
ggcacacgtg gcttttcg	18
SEQ ID NO: 61	moltype = DNA length = 24
FEATURE	Location/Qualifiers
misc_feature	1..24
	note = Telo antisense
source	1..24
	mol_type = other DNA
	organism = synthetic construct
SEQUENCE: 61	
ggtgaacctc gtaagtttat gcaa	24
SEQ ID NO: 62	moltype = DNA length = 24
FEATURE	Location/Qualifiers
misc_feature	1..24
	note = Telo probe
source	1..24
	mol_type = other DNA
	organism = synthetic construct
SEQUENCE: 62	
tcaggacgtc gagtggacac ggtg	24

1. A population of haematopoietic stem and/or progenitor cell (HSPCs) for use in a method of therapy, the method comprising the steps of:

- (a) administering one or more HSPC mobiliser to a subject to mobilise endogenous HSPCs from the subject's bone marrow; and
- (b) administering the population of HSPCs to the subject.

2. The population of HSPCs for use according to claim 1, wherein the population of HSPCs is administered at or after the peak of mobilisation.

3. The population of HSPCs for use according to claim 1 or 2, wherein the one or more HPSC mobiliser is selected from a granulocyte colony-stimulating factor (G-CSF), a CXCR4 antagonist and a VLA-4 antagonist, or any combination thereof.

4. The population of HSPCs for use according to any of claims 1-3, wherein the population of HSPCs are autologous HSPCs.

5. The population of HSPCs for use according to any of claims 1-4, wherein the population of HSPCs is cultured ex vivo prior to administration.

6. The population of HSPCs for use according to any of claims 1-5, wherein the population of HSPCs are genetically engineered to express a transgene, gene-edited, and/or gene-corrected.

7. The population of HSPCs for use according to any of claims 1-6, wherein the population of HSPCs are genetically engineered to express one or more engraftment enhancer.

8. The population of HSPCs for use according to claim 7, wherein the one or more engraftment enhancer is selected from C-X-C chemokine receptor type 4 (CXCR4) or a fragment or variant thereof, CD47 or a fragment or variant thereof, integrin alpha-4 (ITGA4) or a fragment or variant thereof, and tyrosine-protein kinase KIT (KIT) or a fragment or variant thereof, or any combination thereof.

9. A population of genetically engineered haematopoietic stem and/or progenitor cells (HSPCs), wherein the HSPCs are genetically engineered to express a CXCR4 variant, ITGA4, and/or KIT, wherein the CXCR4 variant comprises one or more amino acid substitution selected from: V160L, A175F, Q200A, D262N, and H281A.

10. A method for haematopoietic stem and/or progenitor cell (HSPC) transplantation, comprising the steps:

- (a) providing a population of haematopoietic stem and/or progenitor cells (HSPCs) which are genetically engineered to express a CXCR4 variant, ITGA4, and/or KIT, wherein the CXCR4 variant comprises one or more amino acid substitution selected from: V160L, A175F, Q200A, D262N, and H281A; and
- (b) administering the HSPCs to a subject.

* * * * *